

UTILITY PATENT APPLICATION TRANSMITTAL <small>(Only for new nonprovisional applications under 37 CFR 1.53(b))</small>	Attorney Docket No	0557-4885-2
	First Inventor or Application Identifier	Atsuo SHIMADA, et al.
	Title	DOCUMENT PROCESSOR, DOCUMENT CLASSIFICATION DEVICE, DOCUMENT PROCESSING METHOD, DOCUMENT CLASSIFICATION METHOD, AND COMPUTER-READABLE RECORDING MEDIUM FOR RECORDING PROGRAMS FOR EXECUTING THE METHODS ON A COMPUTER

APPLICATION ELEMENTS <i>See MPEP chapter 600 concerning utility patent application contents</i>	ADDRESS TO: Assistant Commissioner for Patents Box Patent Application Washington, DC 20231
<p>1. <input checked="" type="checkbox"/> Fee Transmittal Form (e.g. PTO/SB/17) (Submit an original and a duplicate for fee processing)</p> <p>2. <input checked="" type="checkbox"/> Specification Total Pages 157</p> <p>3. <input checked="" type="checkbox"/> Drawing(s) (35 U.S.C. 113) Total Sheets 56</p> <p>4. <input type="checkbox"/> Oath or Declaration Total Pages <input type="text"/> a. <input type="checkbox"/> Newly executed (original or copy) b. <input type="checkbox"/> Copy from a prior application (37 C.F.R. §1.63(d)) (for continuation/divisional with box 15 completed) i. <input type="checkbox"/> DELETION OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §1.63(d)(2) and 1.33(b).</p> <p>5. <input type="checkbox"/> Incorporation By Reference (usable if box 4B is checked) The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4B, is considered to be part of the disclosure of the accompanying application and is hereby incorporated by reference therein.</p>	ACCOMPANYING APPLICATION PARTS <p>6. <input type="checkbox"/> Assignment Papers (cover sheet & document(s))</p> <p>7. <input type="checkbox"/> 37 C.F.R. §3.73(b) Statement <input type="checkbox"/> Power of Attorney (when there is an assignee)</p> <p>8. <input type="checkbox"/> English Translation Document (if applicable)</p> <p>9. <input checked="" type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 <input checked="" type="checkbox"/> Copies of IDS Citations (10)</p> <p>10. <input type="checkbox"/> Preliminary Amendment</p> <p>11. <input checked="" type="checkbox"/> White Advance Serial No. Postcard</p> <p>12. <input type="checkbox"/> Small Entity Statement(s) <input type="checkbox"/> Statement filed in prior application. Status still proper and desired.</p> <p>13. <input type="checkbox"/> Certified Copy of Priority Document(s) (if foreign priority is claimed)</p> <p>14. <input checked="" type="checkbox"/> Other: Notice of Priority, List of Inventors' Names and Addresses</p>
15. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below: <input type="checkbox"/> Continuation <input type="checkbox"/> Divisional <input type="checkbox"/> Continuation-in-part (CIP) of prior application no.: Prior application information: Examiner: Group Art Unit:	
16. Amend the specification by inserting before the first line the sentence: <input type="checkbox"/> This application is a <input type="checkbox"/> Continuation <input type="checkbox"/> Division <input type="checkbox"/> Continuation-in-part (CIP) of application Serial No. Filed on <input type="checkbox"/> This application claims priority of provisional application Serial No. Filed	
17. CORRESPONDENCE ADDRESS OBLON, SPIVAK, MCCLELLAND, MAIER & NEUSTADT, P.C. FOURTH FLOOR 1755 JEFFERSON DAVIS HIGHWAY ARLINGTON, VIRGINIA 22202 (703) 413-3000 FACSIMILE: (703) 413-2220	

Name:	Marvin J. Spivak	Registration No.:	24,913
Signature:		Date:	12/27/99
Name:		Registration No.:	

Docket No. 0557-4885-2

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

IN RE APPLICATION OF: Atsuo SHIMIDA, et al.

FILING DATE: Herewith

FOR: DOCUMENT PROCESSOR, DOCUMENT CLASSIFICATION DEVICE, DOCUMENT PROCESSING METHOD, DOCUMENT CLASSIFICATION METHOD, AND COMPUTER-READABLE RECORDING MEDIUM FOR RECORDING PROGRAMS FOR EXECUTING THE METHODS ON A COMPUTER

LIST OF INVENTORS' NAMES AND ADDRESSES

ASSISTANT COMMISSIONER FOR PATENTS
WASHINGTON, D.C. 20231

SIR:


Listed below are the names and addresses of the inventors for the above-identified patent application.

Atsuo SHIMADA	Tokyo, Japan
Tatsuo MIYACHI	Tokyo, Japan
Eiji KENMOCHI	Tokyo, Japan
Makoto YAMASAKI	Tokyo, Japan
Kazutoshi TAKEYA	Tokyo, Japan
Tetsuro NAGATSUKA	Tokyo, Japan

A declaration containing all the necessary information will be submitted at a later date.

Respectfully Submitted,

OBLON, SPIVAK, McCLELLAND,
MAIER & NEUSTADT, P.C.



Marvin J. Spivak
Registration No. 24,913

Fourth Floor
1755 Jefferson Davis Highway
Arlington, Virginia 22202
Tel. (703) 413-3000
Fax. (703) 413-2220
(OSMMN 11/98)

DOCUMENT PROCESSOR, DOCUMENT CLASSIFICATION DEVICE,
DOCUMENT PROCESSING METHOD, DOCUMENT CLASSIFICATION METHOD,
AND COMPUTER-READABLE RECORDING MEDIUM
FOR RECORDING PROGRAMS FOR
EXECUTING THE METHODS ON A COMPUTER

FIELD OF THE INVENTION

The present invention relates to a document processor for displaying and printing multiple input document data in a predetermined format, a document processing method, and a computer-readable recording medium for recording a program to execute the method on a computer. Furthermore, this invention relates to a document classification device and a document classification method for classifying multiple input document data based on the contents thereof, and particularly for refining classification categories calculated during document classification, and to a computer-readable recording medium for recording a program to execute the method on a computer.

BACKGROUND OF THE INVENTION

Various document classification devices and document retrieval devices have been developed in recent years. The proliferation of network technology, such as the Internet, has made it possible to access a huge amount of electronic documents, domestically and overseas, and there has been a proportionate

rapid expansion in the amount of data which is stored electronically. Accordingly, there is an increasing need for intellectual operations such as classifying large collections of document data into meaningful categories.

5 The benefits of classifying large amounts of document data according to their meaning are as follows. Firstly, it makes it easier to retrieve data. Retrieval becomes relatively easy since vast groups of documents can be retrieved using category names as clues.

10 Secondly, entire groups of data can be grasped. That is, it is possible to grasp the contents (individual classifications) of an entire cluster of documents. However, when a large amount of document data is classified by an operator, although accurate classification can be achieved,
15 classification requires enormous manpower and time. Consequently, in view of the huge amount of documents stored in recent years, devices for automatically classifying document data have been proposed.

20 As an example of a conventional device for automatically classifying documents, Japanese Patent Application Laid-open (JP-A) No. 7-36897 discloses a device which defines a document as a document vector characterized by a word, uses clustering to group these document vectors, and automatically classifies the documents based on the grouped document vectors.

25 Furthermore, in "Projections for Efficient Document

Clustering (Authors: Hinrich Schutze and Craing Silverstein,
Academy: ACM, Title of Paper: Proceedings of SIGIR, pages: 78-81,
Year of Publication: 1997)" documents are classified in dormant
meaning space. Other conceivable methods include using a
5 probability theory approach, etc.

Furthermore, in recent years, the proliferation of the
Internet and the like has made it possible to access large
amounts of document clusters, and as a result, there is an
increasing need to be able use these document clusters
10 effectively, and in accordance with the intentions of a variety
of users. To accomplish this, an intellectual operation is
starting to be used in which a large amount of document clusters
is classified into meaningful categories, and the structure of
the document clusters is grasped. However, when this type of
15 classification is performed manually, enormous manpower and
time are required. Further, since only the classifier knows
how to classify the document data, classification standard
change when the person responsible for classification is
replaced.

20 Consequently, there is a demand for a document
classification device capable of automatically classifying
groups of documents according to the same type of classification
standards used by humans. For example, as disclosed in Japanese
Patent Application Laid-open (JP-A) No. 7-114572, a document
25 classification device capable of automatically extracting a

word characteristic vector from a document, and classifying the document based on the characteristic vector, thereby making it possible to automatically classify the documents using meaningful differences.

5 However, since the conventional document classification device described above uses a method for statistically classifying documents arranged in multi-dimensional space essentially comprising words, the result of the classification is nothing more than the statistically determined behaviour of
10 the words. Consequently, clusters (partial groups of individual classified documents) calculated after classification are sometimes incomprehensible to the operator (user).

15 A further problem is that the question of what kind of classification is appropriate depends on the characteristics of the document clusterings to be classified and the intentions of the user, making it difficult to define an appropriate classification. In particular, when grasping entire data groups as mentioned above, the type of classification required
20 will differ depending on the widely varying intentions of the operators, and it will be difficult to obtain the result desired by the operator in a single classification.

 Thus, the problem can be interpreted by saying that a document classification result includes a great amount of noise,
25 only one part of which is of use to the operator.

Furthermore, the conventional technology does not consider the constitutional units of the document, and in a case where the structure of a document is partitioned by one or multiple period symbols, titles, and the like, multiple topics and meanings are contained in a single document. This results in problems that it is difficult for a user to understand the classification categories, the category may be limited to a specific topic or specific meaning, or the document may be classified under a category different to that intended by the user.

A context-dependent automatic classification device is disclosed in Japanese Patent Application Laid-open (JP-A) No. 6-176064, and aims to increase classification precision by automatically classifying documents in consideration of the conclusive data therein, but essentially does not solve the problems mentioned above.

Furthermore, conventional document processors, such as the document classification device and document retrieve device described above, merely classify or retrieve documents, and give no consideration to further analysis of information hidden in the document clusters. Consequently, they have a disadvantage that a separate analyzing device must be used to analyze information hidden in the document clusters.

Furthermore, the operator who wishes to analyze the information does not perform classification and retrieval as

an end in itself, but simply as an intermediate Step during his analysis of the information. After classification and retrieval, in order to grasp the result more easily it is usually necessary to derive a meaningful result from the information analysis by repeating a variety of other processes, such as maximizing the practical usefulness of the information included in the original document, rearranging the result, carrying out totalization and statistical processing, and drawing up charts and graphs based on the results.

Furthermore, table-calculating software is sometimes needed when analyzing information about numerical data. However, table-calculating software was originally developed to handle numerical data, and is not sufficiently effective for analyzing textual data, particularly when the analysis concerns the meaning of documents.

SUMMARY OF THE INVENTION

This invention has been achieved in order to solve the problems of the conventional examples described above. It is a first object of the present invention to provide a document processor, a document processing method, and a computer-readable recording medium storing programs for executing the method on a computer, for carrying out analysis concerning the meaning of documents, not simply by outputting the results of fixed functions such as classification and retrieval, but by

supporting a complete range of information analysis.

To solve the problems of the conventional example described above, it is a second object of the present invention to provide a document classification device and a document classification method capable of momentarily determining what type of contents are contained in a given document cluster, and a computer-readable recording medium for storing programs for executing the method on a computer.

Furthermore, to solve the problems of the conventional example described above, it is a third object of the present invention to provide a document classification device and a document classification method wherein, when one document contains multiple topics and meanings, these can be classified into categories according to specific topics and meanings, so that the classifications do not differ from categories desired by a user, thereby enabling the user to easily comprehend the classification categories, and a computer-readable recording medium for storing programs for executing the method on a computer.

In order to solve the problems mentioned above, the document processor according to one aspect of the present invention for displaying and printing in a predetermined format multiple input document data, comprises a document memory unit for storing input document data; a selection unit for selecting all or part of document data stored in the documents memory unit;

0042221 0422460
a characteristics extraction unit for extracting data relating
to characteristics of letter rows from all or part of the
document data selected by the selection unit; a work processing
unit for work-processing all or part of the document data based
5 on the data relating to characteristics of letter rows extracted
by the characteristics extraction unit; and an output unit for
outputting all or part of the document data work-processed by
the work processing unit.

According to the above aspect of this invention, when
10 analyzing documents according to their meanings, rather than
merely outputting the result of the analysis, the entire
information analysis operation can be supported.

Further, the output unit of the document processor
comprises an item value set unit for setting a plurality of item
15 values based on the contents of all or part of the document data
work-processed by the work-processing unit; and a totalization
unit for totalizing all or part of the document data for each
item value set by the item value set unit. Furthermore, the
output unit outputs all or part of the document data in the format
20 of a table having an item value as at least one axis.

Hence the result of the work-processing can easily be
expressed in a cross table, and the contents of the information
can easily be grasped. Therefore, when analyzing documents
according to their meanings, rather than merely outputting the
25 result of the analysis, the entire information analysis

operation can be supported.

Further, the output unit outputs all or part of the document data work-processed by the work processing unit together with all or part of the document data in its state prior
5 to work-processing by the work processing unit.

Hence data to be work-processed and other data can be displayed simultaneously and identified, whereby the range of the work-processing to be carried out can be accurately and easily determined. Therefore, when analyzing documents
10 according to their meanings, rather than merely outputting the result of the analysis, the entire information analysis operation can be supported.

Further, the document memory unit also stores all or part of the document data work-processed by the work processing unit.

15 Since other data can be handled simultaneously, when thereafter analyzing documents according to their meanings, rather than merely outputting the result of the analysis, the entire information analysis operation can be supported.

Further, the selection unit further selects all or part
20 of the document data output by the output unit.

Since all or part of the document data output by the output unit can be selected for analysis, a wide variety of information can be analyzed with high precision. Therefore, when analyzing documents according to their meanings, rather than merely
25 outputting the result of the analysis, the entire information

analysis operation can be supported.

Further, the document memory unit further stores data relating to contents of the work processing.

Hence not only can loss of data relating to the contents of work-processing can be prevented and the data managed easily, but also the relationship between settings used in the work-processing and the processed result can be determined. Therefore, when analyzing documents according to their meanings, rather than merely outputting the result of the analysis, the entire information analysis operation can be supported.

A document classification device for classifying documents based on contents thereof according to another aspect of the present invention comprises an input unit for inputting document data; a language analyzer unit for analyzing document data input by the input unit and obtaining language analysis information; a vector creation unit for document characteristic vectors for the document data based on the language analysis information obtained by the language analyzer unit; a classification unit for classifying documents based on the degree of similarity between document characteristic vectors created by the vector creation unit, and creating clusters of documents; a cluster characteristics calculation unit for calculating cluster characteristics, which are characteristics of clusters of documents created by the classification unit; and a classification category memory unit

for storing cluster characteristics, calculated by the cluster characteristics calculation unit, as constituent elements of classification categories.

According to the above aspect of this invention, it is possible to obtain clusters, and to structure and categorize the clusters based on their contents using their degree of similarity to the cluster center, and the like.

A document classification device for classifying documents based on contents thereof according to still another aspect of the present invention comprises an input unit for inputting document data; a language analyzer unit for analyzing document data input by the input unit and obtaining language analysis information; a vector creation unit for creating document characteristic vectors for the document data based on the language analysis information obtained by the language analyzer unit; a classification unit for classifying documents based on the degree of similarity between document characteristic vectors created by the vector creation unit, and creating clusters of documents; a cluster characteristics calculation unit for calculating cluster characteristics, which are characteristics of clusters of documents created by the classification unit; a display unit for displaying the cluster characteristics calculated by the cluster characteristics calculation unit; a cluster selection specification unit for selecting predetermined clusters from

cluster of documents created by the classification unit; and
a classification category memory unit for storing cluster
characteristics, calculated by the cluster characteristics
calculation unit, as constituent elements of classification
5 categories.

According to the above aspect of this invention, only
selected clusters are used, making it possible to structure and
categorize to clusters in a manner closer to that desired by
the operator.

Further, the arrangement of the present invention
described above further comprises a document characteristic
vector memory unit for storing document characteristic vectors
created by vector creation unit; and a vector correction unit
for correcting document characteristic vectors stored in the
15 document characteristic vector memory unit, so that document
characteristic vectors of documents belonging to clusters
selected by the cluster selection unit are deleted.
Furthermore, the classification unit classifies documents
based on the document characteristic vectors corrected by the
20 vector correction unit.

Hence the effects of clusters which are already known can
be eliminated, and new clusters can be created.

Further, the document classification device of the
present invention further comprises a document characteristic
25 vector memory unit for storing document characteristic vectors

created by vector creation unit; and a document expression space
correction unit for correcting document expression space when
determining the degree of similarity between document
characteristic vectors stored in the document characteristic
vectors memory unit, based on a characteristics amount
calculated from clusters selected by the cluster selection unit.
Furthermore, the classification unit classifies documents
based on the degree of similarity between document
characteristic vectors created by the vector creation unit,
using the document expression space corrected by the document
expression space correction unit.

Hence, cluster characteristics selected by the operator
in the previous classification can be eliminated from the next
classification, enabling new clusters to be created.

Further, the document classification device according to
the present invention further comprises a document
characteristic vector memory unit for storing document
characteristic vectors created by vector creation unit; and a
document expression space correction unit for correcting
document expression space when determining the degree of
similarity between document characteristic vectors stored in
the document characteristic vectors memory unit, based on a
characteristics amount calculated from clusters selected by the
cluster selection unit. Furthermore, the classification unit
classifies documents based on the degree of similarity between

document characteristic vectors created by the vector creation unit, using the document expression space corrected by the document expression space correction unit.

Hence influences of the known cluster can be eliminated
5 and cluster characteristics selected by the operator in the previous classification can be eliminated from the next classification, enabling new clusters to be created.

Further, the document classification device of the present invention further comprises a selection information
10 appending unit for appending selection information showing the fact of selection when all or part of the documents belonging to a cluster of documents created by the classification unit have been selected. Furthermore, the display unit displays the cluster characteristics, and also displays the selection
15 information appended by the selection information appending unit.

Hence it is possible to improve the ability to identify documents used on multiple occasions, and the ability to identify documents which have not been selected at all.

20 Further, the classification category memory unit stores cluster characteristics and/or information created by an operator, in addition to all or part of the documents belonging to a cluster of documents selected by the selection specification unit, as constituent elements of classification
25 categories.

Hence the contents of clusters can be easily recognized, and in addition, the operator can easily create his own classification categories, thereby improving the usefulness of the classification categories.

5 A document classification device for classifying document clusters in accordance with contents thereof according to still another aspect of the present invention comprises a document input unit for inputting document data groups; a document dividing unit for dividing document data into one or multiple divided document data based on a predetermined reference; a document-divided document map creation unit for creating a map showing the correspondence between the document data and the divided document data; a divided document classification unit for classifying the divided document data; 10 a divided document classification result creation unit for creating divided document classification result information based on a classification result of the divided document classification unit; and a document classification result creation unit for creating classification result information of the above document data using the document-divided document map and the divided document classification result information. 15 20

According to the above aspect of this invention, when one document contains multiple topics and meanings, these can be classified into categories according to specific topics and meanings, so that the classifications do not differ from 25

categories desired by a user, thereby enabling the user to easily comprehend the classification categories. Furthermore, since the positions of the divided documents in documents prior to division (documents belonging to the clusters) is displayed, the user is able to efficiently read the parts of the document clusters he or she wishes to read.

Further, the document classification device further comprises a document save unit for saving the document data; a divided document save unit for saving the divided document data; and a document-divided document map save unit for saving a document-divided document map created by the document-divided document map creation unit.

Hence for a single document data, it is possible to efficiently determine classification results having different parameters such as the number of classifications, the classification method, and the settings used in the classifications, without recreating the divided document data and the document-divided document map. Furthermore, by classifying the document data and saving the data needed to create the classification result, the user is free to take more time over the classification, and to re-analyze previously classified documents within a given period of time.

Further, the document classification device in the specific arrangement described above further comprises a divided document classification result save unit for saving

divided document classification result information created by the divided document classification result creation unit.

Hence, an additional effect, such that after one classification has been carried out, the result of that classification can be expressed in a variety of formats such as text, charts, graphs, and the like can be achieved. Furthermore, by saving the divided document classification result information, the user is free to take more time over classifications and analysis of classification results, and to re-analyze previously classified documents in a variety of formats within a given period of time.

Further, the multiple divided document data created by the document dividing unit contains the document data in its state prior to being divided.

Hence in addition to a classification structure of detailed document data, obtained by classifying the divided document data, the user can obtain a classification structure fusing schematic macro classifications as a result of classifying the document data itself prior to division.

Further, the document dividing unit divides document data based on information relating to the structure of the document data.

Hence division and the like of different topics can be carried out, whereby documents can be classified in such a manner that the detailed classification structures of their

document data can be known.

Further, the document classification device further comprises a document element extraction unit for extracting elements in the document data; an element-accompanying information extraction unit for extracting element-accompanying information accompanying the elements extracted by the document element extraction unit. Furthermore, the document dividing unit divides the document data using elements extracted by the document element extraction unit, or the elements and element-accompanying information extracted by the element-accompanying information extraction unit.

Hence documents can be classified so that the detailed classification structure of the document data can be known.

Further, the document dividing unit divides document data in compliance with a specified specification range.

Hence documents can be classified in accordance with the wishes of the user, and so that the detailed classification structure of the document data can be known.

Further, the document dividing unit divides document data based on the number of letters, the number of sentences, or both the number of letters and the number of sentences.

Hence there is an increased capability to classify different documents having contents of different topics and the like. Therefore, as above, documents can be classified so that the detailed classification structure of the document data can

be known.

Further, the document classification result creation unit extracts and presents information showing document data, and representative information accompanying the document data, as classification result information.

Hence the user is able to determine a detailed schematic structure or overall structure of the document data.

Further, the document classification result creation unit extracts and presents information showing divided document data, and representative information accompanying the divided document data, as classification result information.

Hence the user is able to determine a detailed schematic structure or overall structure of the document data. In addition, the user can easily determine which divided document has been classified in a given category.

A document processing method according to still another aspect of the present invention outputs multiple input document data in order to display or print the document data in a predetermined format, and comprises the steps of storing input document data; selecting all or part of the document data stored in the documents memory unit; extracting data relating to characteristics of letter rows from all or part of the document data selected by the selection unit; work-processing all or part of the document data based on the data relating to characteristics of letter rows extracted by the characteristics

extraction unit; and outputting all or part of the document data work-processed by the work processing unit.

According to the above aspect of this invention, when analyzing documents according to their meanings, rather than merely outputting the result of the analysis, the entire information analysis operation can be supported.

Further, the step of outputting comprises the steps of setting a plurality of item values based on the contents of all or part of the document data work-processed by the work-processing unit; and totalizing all or part of the document data for each item value set by the item value set unit; and outputs all or part of the document data in the format of a table having an item value as at least one axis.

Hence the result of the work-processing can easily be expressed in a cross table, and the contents of the information can easily be grasped. Therefore, when analyzing documents according to their meanings, rather than merely outputting the result of the analysis, the entire information analysis operation can be supported.

Further, the step of outputting further comprises outputting all or part of the document data work-processed by the work processing unit together with all or part of the document data in its state prior to work-processing by the work processing unit.

Hence the data to be work-processed and other data can

be displayed simultaneously and identified, whereby the range of the work-processing to be carried out can be accurately and easily determined. Therefore, when analyzing documents according to their meanings, rather than merely outputting the result of the analysis, the entire information analysis operation can be supported.

Further, the step of storing further comprises storing all or part of the document data work-processed by the work processing unit.

Since other data can be handled simultaneously, when thereafter analyzing documents according to their meanings, rather than merely outputting the result of the analysis, the entire information analysis operation can be supported.

Further, the step of selecting further comprises selecting all or part of the document data output by the output unit.

Since all or part of the document data output by the output unit can be selected for analysis, a wide variety of information can be analyzed with high precision. Therefore, when analyzing documents according to their meanings, rather than merely outputting the result of the analysis, the entire information analysis operation can be supported.

Further, the step of storing a document further comprises storing data relating to contents of the work processing.

Hence not only can loss of data relating to the contents

of work-processing can be prevented and the data managed easily,
but also the relationship between settings used in the
work-processing and the processed result can be determined.
Therefore, when analyzing documents according to their meanings,
5 rather than merely outputting the result of the analysis, the
entire information analysis operation can be supported.

A document classification method for classifying
documents based on contents thereof according to still another
aspect of the present invention comprises the steps of inputting
10 document data; language-analyzing document data input in the
step of inputting and obtaining language analysis information;
creating document characteristic vectors for the document data
based on the language analysis information obtained in the step
of language-analyzing; classifying documents based on the
15 degree of similarity between document characteristic vectors
created in the step of creating vectors, and creating clusters
of documents; calculating cluster characteristics, being
characteristics of clusters of documents created in the step
of classifying; and storing cluster characteristics,
20 calculated in the step of calculating cluster characteristics,
as constituent elements of classification categories.

According to the above aspect of this invention, it is
possible to obtain clusters, and to structure and categorize
the clusters based on their contents using their degree of
25 similarity to the cluster center, and the like.

5 A document classification method for classifying documents based on contents thereof according to still another aspect of the present invention comprises the steps of inputting document data; language-analyzing document data input in the step of inputting and obtaining language analysis information; creating document characteristic vectors for the document data based on the language analysis information obtained in the step of language-analyzing; classifying documents based on the degree of similarity between document characteristic vectors created in the step of creating vectors, and creating clusters of documents; calculating cluster characteristics, which are characteristics of clusters of documents created in the step of classifying; displaying the cluster characteristics calculated in the step of calculating cluster characteristics; selecting predetermined clusters from cluster of documents created in the step of classifying; and storing cluster characteristics, calculated in the step of calculating cluster characteristics, as constituent elements of classification categories.

20 According to the above aspect of this invention, only selected clusters are used, making it possible to structure and categorize to clusters in a manner closer to that desired by the operator.

Further, the document classification method further comprises a step of correcting document characteristic vectors

stored in the step of storing document characteristic vectors,
so that document characteristic vectors of documents belonging
to clusters selected by the step of selecting clusters are
deleted. Furthermore, the step of classifying comprises
5 classifying documents based on the document characteristic
vectors corrected by the step of correcting vectors.

Hence the effects of clusters which are already known can
be eliminated, and new clusters can be created.

Further, the document classification method further
10 comprises a step of correcting document expression space when
determining the degree of similarity between document
characteristic vectors stored in the step of storing document
characteristic vectors, based on a characteristics amount
calculated from clusters selected in the step of selecting
15 clusters, and the step of classifying comprises classifying
documents based on the degree of similarity between document
characteristic vectors created in the step of creating vectors,
using the document expression space corrected in the step of
correcting the document expression space.

20 Hence cluster characteristics selected by the operator
in the previous classification can be eliminated from the next
classification, enabling new clusters to be created.

Further, the document classification method further
comprises the steps of correcting document expression space
25 when determining the degree of similarity between document

characteristic vectors stored in the step of storing document
characteristic vectors, based on a characteristics amount
calculated from clusters selected in the step of selecting
clusters. Furthermore, the step of classifying comprises
5 classifying documents based on the degree of similarity between
document characteristic vectors created in the step of creating
vectors, using the document expression space corrected in the
step of correcting the document expression space.

Hence influences of the known cluster can be eliminated
10 and cluster characteristics selected by the operator in the
previous classification can be eliminated from the next
classification, enabling new clusters to be created.

Further, the document classification method further
comprises the steps of appending selection information showing
15 the fact of selection when all or part of the documents belonging
to a cluster of documents created in the step of classifying
have been selected. Furthermore, the step of displaying
comprises displaying the cluster characteristics, and
displaying the selection information appended in the step of
20 appending selection information.

Hence it is possible to improve the ability to identify
documents used on multiple occasions, and the ability to
identify documents which have not been selected at all.

Further, the step of creating classification categories
25 comprises creating cluster characteristics and/or information

created by an operator, in addition to all or part of the documents belonging to a cluster of documents selected in the step of specifying selection, as constituent elements of classification categories.

5 Hence the contents of clusters can be easily recognized, and in addition, the operator can easily create his own classification categories, thereby improving the usefulness of the classification categories.

60472349.0422400
10 A document classification method for classifying document clusters in accordance with contents thereof according to still another aspect of the present invention comprises the steps of inputting document data groups; dividing document data into one or multiple divided document data based on a predetermined reference; creating a map showing the
15 correspondence between the document data and the divided document data; classifying the divided document data; creating divided document classification result information based on the classification result of classifying the divided documents; and
20 creating classification result information of the document data using the document-divided document map and the divided document classification result information.

 According to the above aspect of this invention, when one document contains multiple topics and meanings, these can be classified into categories according to specific topics and
25 meanings, so that the classifications do not differ from

categories desired by a user, thereby enabling the user to easily comprehend the classification categories. Furthermore, since the positions of the divided documents in documents prior to division (documents belonging to the clusters) is displayed, the user is able to efficiently read the parts of the document clusters he or she wishes to read.

A computer-readable recording medium of still another aspect of the present invention stores programs for executing the above-described document classification method on a computer, thereby making the program readable mechanically, and enabling the operation of the document classification method to be executed by a computer.

Other objects and features of this invention will become understood from the following description with reference to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a diagram explaining the entire hardware constitution of a data processing system comprising a document processor according to a first embodiment of the present invention;

Fig. 2 is a diagram explaining the hardware constitution of a server in a data processing system comprising the document processor according to the first embodiment of the present invention;

Fig. 3 is a diagram explaining the hardware constitution of a client in a data processing system comprising the document processor according to the first embodiment of the present invention;

5 Fig. 4 is a block diagram functionally showing a constitution of the document processor according to the first embodiment of the present invention;

10 Fig. 5 is a diagram explaining the relationship between item names of the document processor according to the first embodiment of the present invention;

Fig. 6 is a diagram explaining a data structure of a document stored in a document memory of the document processor according to the first embodiment of the present invention;

15 Fig. 7 is a diagram explaining another data structure of a document stored in a document memory of the document processor according to the first embodiment of the present invention;

Fig. 8 is a diagram explaining an example of a screen display in an output section of a document processor according to an embodiment of the present invention;

20 Fig. 9 is a diagram explaining another example of a screen display of an output section of a document processor according to an embodiment of the present invention;

Fig. 10 is a diagram explaining another example of a screen display of an output section of a document processor
25 according to an embodiment of the present invention;

Fig. 11 is a diagram explaining a list of contents of extraction processing performed by a characteristics extractor of a document processor according to the first embodiment of the present invention;

5 Fig. 12 is a diagram explaining a list of contents of work processing performed by a work processor of a document processor according to the first embodiment of the present invention;

10 Fig. 13 is a diagram explaining characteristic vectors of each item of a document processor according to the first embodiment of the present invention;

Fig. 14 is a diagram explaining words, and the number of appearances of each word ID, of a document processor according to the first embodiment of the present invention;

15 Fig. 15 is a diagram explaining another screen display of an output section of a document processor according to the first embodiment of the present invention;

20 Fig. 16 is a diagram explaining a command screen for creating a cross table in an output section of a document processor according to the first embodiment of the present invention;

Fig. 17 is a diagram explaining a cross table displaying a result of classification processing by an output section of a document processor according to the first embodiment of the present invention;

25 Fig. 18 is a diagram explaining another cross table

displaying a result of classification processing by an output section of a document processor according to the first embodiment of the present invention;

Fig. 19 is a block diagram showing a detailed constitution of an output section of a document processor according to the first embodiment of the present invention;

Fig. 20 is a flowchart showing an output sequence of a cross table of a document processor according to the first embodiment of the present invention;

Fig. 21 is a diagram explaining another screen display of an output section of a document processor according to the first embodiment of the present invention;

Fig. 22 is a diagram explaining another screen display of an output section of a document processor according to the first embodiment of the present invention;

Fig. 23 is a diagram explaining another screen display of an output section of a document processor according to the first embodiment of the present invention;

Fig. 24 is a diagram explaining another screen display of an output section of a document processor according to the first embodiment of the present invention;

Fig. 25 is a block diagram showing a detailed constitution of document memory of a document processor according to the first embodiment of the present invention;

Fig. 26 is a diagram explaining another screen display

of an output section of a document processor according to the first embodiment of the present invention;

Fig. 27 is a diagram explaining another screen display of an output section of a document processor according to the first embodiment of the present invention;

Fig. 28 is a diagram explaining another screen display of an output section of a document processor according to the first embodiment of the present invention;

Fig. 29 is flowchart showing a sequence of document processing in a document processor according to the first embodiment of the present invention;

Fig. 30 is a block diagram functionally showing a constitution of a document classification device according to a second embodiment of the present invention;

Fig. 31 is a diagram explaining an example of a display of a cluster characteristics display section in a document classification device according to the second embodiment of the present invention;

Fig. 32 is a flowchart showing a sequence of processing in a document classification device according to the second embodiment of the present invention;

Fig. 33 is a block diagram functionally showing a constitution of a document classification device according to a third embodiment of the present invention;

Fig. 34 is a flowchart showing a sequence of processing

in a document classification device according to the third embodiment of the present invention;

Fig. 35 is a block diagram functionally showing a constitution of a document classification device according to a fourth embodiment of the present invention;

Fig. 36 is a flowchart showing a sequence of processing in a document classification device according to the fourth embodiment of the present invention;

Fig. 37 is a block diagram functionally showing a constitution of a document classification device according to a fifth embodiment of the present invention;

Fig. 38 is a flowchart showing a sequence of processing in a document classification device according to the fifth embodiment of the present invention;

Fig. 39 is a block diagram functionally showing a constitution of a document classification device according to a sixth embodiment of the present invention;

Fig. 40 is a diagram explaining a table provided in a classification result memory of a document classification device according to the sixth embodiment of the present invention;

Fig. 41 is a flowchart showing a processing sequence of a selection information append section of a document classification device according to the sixth embodiment of the present invention;

Fig. 42 is a block diagram showing a constitution of a document classification device according to a seventh embodiment of the present invention;

Fig. 43 is a diagram explaining a document classification device and a document classification method according to the seventh embodiment of the present invention;

Fig. 44 is another diagram explaining a document classification device and a document classification method according to the seventh embodiment of the present invention;

Fig. 45 is another diagram explaining a document classification device and a document classification method according to the seventh embodiment of the present invention;

Fig. 46 is another diagram explaining a document classification device and a document classification method according to the seventh embodiment of the present invention;

Fig. 47 is a block diagram showing a constitution of a document classification device according to an eighth embodiment of the present invention;

Fig. 48 is a block diagram showing a constitution of a document classification device according to a ninth embodiment of the present invention;

Fig. 49 is a diagram explaining a document classification device and a document classification method according to a tenth embodiment of the present invention;

Fig. 50 is a diagram explaining a document classification

device and a document classification method according to an eleventh embodiment of the present invention;

Fig. 51 is a block diagram showing a constitution of a document classification device according to a twelfth embodiment of the present invention;

Fig. 52 is a diagram explaining a document classification device and a document classification method according to the twelfth embodiment of the present invention;

Fig. 53 is a diagram explaining a document classification device and a document classification method according to a thirteenth embodiment of the present invention;

Fig. 54 is a diagram explaining a document classification device and a document classification method according to a fourteenth embodiment of the present invention;

Fig. 55 is a diagram explaining a document classification device and a document classification method according to a fifteenth embodiment of the present invention; and

Fig. 56 is a diagram explaining a document classification device and a document classification method according to a sixteenth embodiment of the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Preferred embodiments of a document processor, a document processing method, and a computer-readable recording medium for recording a program to execute the method on a computer

according to the present invention will be described below with reference to the accompanying drawings.

To begin with, the hardware constitution of an entire data processing system comprising a document processor according to a first embodiment of the present invention will be explained. Fig. 1 is a diagram explaining the hardware constitution of an entire data processing system comprising a document processor according to the first embodiment of the present invention.

As shown in Fig. 1, a data processing system comprising the document processor according to the first embodiment comprises a server/client system. That is, a server 101 and multiple clients 102 are connected via a network 103. The clients 102 create work data such as classification data, send this to the server 101, and display the results of work processing such as classification, and the like. On the other hand, in compliance with specifications from the clients 102, the server 101 carries out vast numerical calculations to perform work processing such as document (text) classification, and sends the results of the processing to the clients 102.

More specifically, when performing classification processing, the server 101 classifies a text (pre-processing, clustering) and the clients 102 create classification data, program execution commands, tables of text classification result, and such like. As described above, the processing at the server 101 is divided into two types, "pre-processing" and

“classification”, and the burden of this processing can be extremely heavy when there is a vast amount of data. Therefore, a manager process creates a processing receive list and controls the processing, so that “pre-processing” and “classification”
5 in the server 101 are only performed once each.

Furthermore, data is exchanged between the server 101 and the clients 102 by a method termed joint filing. That is, a file used in processing such as classification is created in a joint folder on the server 101, enabling both sides to exchange
10 the data. Therefore, the clients 102 can use the joint folder of the server 101 via the joint network.

The constitution of the hardware of the server 101 and the clients 102 will be explained below. Fig. 2 is a diagram explaining a hardware constitution of the server 101 in the data
15 processing system comprising the document processor according to the first embodiment. A work station (WS) is, for example, used as the server 101.

In Fig. 2, reference symbol 201 represents a CPU for controlling the entire server 101, reference symbol 202
20 represents a ROM which stores boot programs and the like, reference symbol 203 represents a RAM used as work area of the CPU 201, reference symbol 204 represents an interface (I/F), which is connected to the network 103 via a communications line 205 and controls the network 103 and an internal interface, and
25 reference symbol 206 represents a disk device for storing data.

The reference symbol 200 represents a bus for coupling the above parts.

In addition, a display 208 for displaying document information, image information, function information, and the like, a keyboard 209 for inputting data, and a mouse 210 and the like, may similarly be connected. Moreover, the disk device 206 comprises a joint folder 207 for exchanging data with the clients 102.

Furthermore, Fig. 3 is a diagram explaining a hardware constitution of a client 102 in a data processing system comprising the document processor according to the first embodiment. A personal computer (PC) is, for example, used as the client 102.

In Fig. 3, reference symbol 301 represents a CPU for controlling the entire system, reference symbol 302 represents a ROM which stores boot programs and the like, reference symbol 303 represents a RAM used as a work area of the CPU 301, reference symbol 304 represents an HDD (hard disk drive) for controlling reading and writing of data to an HD (hard disk) 305 in compliance with the CPU 301, reference symbol 305 represents an HD for storing data written in compliance with the HDD 304, reference symbol 306 represents an FDD (floppy disk drive) for controlling reading and writing of data to an FD (floppy disk) 307 in compliance with the CPU 301, reference symbol 307 represents a freely attachable and detachable FD for storing data written

in compliance with the FDD 306, and reference symbol 308 represents a display for displaying documents, images, function data, etc.

Furthermore, reference symbol 309 represents an
5 interface (I/F), which is connected to the network 103 via a communications line 310 and controls the network 103 and the internal interface, reference symbol 311 represents a keyboard comprising keys for inputting letters, numbers, a variety of commands, and the like, reference symbol 312 represents a mouse
10 for moving a cursor and selecting a range, or pressing icons and buttons displayed on a display screen, moving windows and changing their sizes, and the like, reference symbol 313 represents a scanner for optically reading images having an OCR (optical character reader) function, reference symbol 314
15 represents a printer for printing contents and the like of data comprising classification results, and reference symbol 315 represents a bus for joining all the above parts. Furthermore, an application software 316 such as a word processing software is stored in the HD 305.

20 Functional constitution of the document processor according to the first embodiment will be explained here. Fig. 4 is a block diagram functionally showing a constitution of the document processor according to the first embodiment of the present invention. In Fig. 4, the document processor comprises
25 an input section 401, a document memory 402, a selector 403,

a characteristics extractor 404, a work processor 405, and an output section 406.

The input section 401, the document memory 402, the selector 403, the characteristics extractor 404, the work processor 405, and the output section 406, are controlled by CPU 201 and CPU 301 and the like, which operate processing in compliance with commands contained in programs recorded in recording media such as a ROM 202 and 302, a RAM 203 and 303, or a disk device 306 and a hard disk 316, etc.

The input section 401 inputs document data, and for example comprises the I/F 204 or 309, or the like, capable of obtaining documents and groups of documents via a keyboard 209 or 311, a scanner 313 comprising an OCR function, and a network 103. Furthermore, in addition to the above, if the input section 401 is capable of extracting document data, it comprises all the above parts. For example, when the document data is saved in a data base, and the medium in which the data base is stored is provided in the document processor of the first embodiment, document data is input.

A document is a collection of one or more sentences written in a natural language, comprising letters, rows of letters, numbers, and the like, which are organized into a meaningful arrangement to form one document. Furthermore, a collection of multiple documents is termed a document cluster.

A document comprises one or multiple items. An item

comprises item name and item value. An item name is a label showing the contents of the item, and may or may not be included in the document. An item value is the actual content of the item. Fig. 5 is a diagram explaining the relationship between an item name and an item value in the document processor according to the first embodiment. Fig. 5 shows an example in which one patent specification forms one document, and the patent specification is expressed using an item name and an item value.

A unique document ID is appended to each document and each document in the document clusters obtained by the input section 401, and these are stored in the document memory 402. Fig. 6 is a diagram explaining the structure of document data stored in the document memory 402 of the document processor according to the first embodiment. Each of the item names and item values are saved in one memory unit, that is, in one cell of the document memory 402.

In Fig. 6, one cell comprises three memory regions, and the position (number) of the next cell in the document memory 402 is stored in the first memory region 601. The generic value of the cell is stored in the second memory region 602.

The generic values of the cells can, for example, be set such that "0" signifies "empty", "1" signifies "numerical value", and "2" signifies a letter row.... The content of the cell, that is, the head position of the region which the item

name or the item value and the like are stored in, is stored in the third memory region 603.

Rearrangement of the cell sequence, and addition and deletion of cells, can easily be performed by changing the position of the next cell stored in the first memory region 601. Furthermore, since the actual content of the cell is stored in a different region in the cell structure, when an item has been updated and can no longer be held in a region reserved in advance, for example, it is only necessary to reserve another large region in which to store the item, with no effect on the structure of the cell itself, and to update the head position of the third memory region 603 stored third.

Fig. 7 is a diagram explaining another data structure of a document stored in the document memory 402 of the document processor according to the first embodiment. In Fig. 7, one cell uses two memory regions. The generic value of the cell is stored in a first memory region 701. The content of the cell, that is, the head position of the region which the item name or the item value and the like are stored in, is stored in a second memory region 702.

The next cell is stored in the next memory region adjacent in the document memory 402. With this data structure, a movement operation within the memory is required when cells have been rearranged, added, or deleted.

The document memory 402 comprises a semiconductor memory

for handling data usually at high-speed, but may include an auxiliary memory device comprising a magnetic disk, an optical disk, or the like.

Documents and document clusters stored in the document memory 402 are displayed by the output section 406. In the first embodiment, the output section 406 comprises a CRT display, a liquid crystal display, or the like. The output section 406 reads out the contents of documents and document clusters stored in the document memory 402 in the cell sequence, and displays or prints them in table format.

Furthermore, the output section 406 may also comprise a graph drawer 407 for drawing graph based on the data displayed or printed in table format. The graph drawer 407 reads out contents of a region set by the user with respect to item values of a document or a cluster of documents stored in the document memory 402, draws graph such as bar graphs, pie charts, regular line graphs, and the like, and displays and prints them.

The output section 406 also displays operations of the input section 401, by for example displaying operation menus, mouse pointers, cursor displays, and the like. Furthermore, the output section 406 may also comprise a printing device such as a printer for printing the results of processing.

In compliance with a command input by the operator to the input section 401, the selector 403 reads out data in a region selected by the display of the output section 406 from the

document memory 402, and sends it to the characteristics extractor 404. The method by which the selector 403 makes its selection will be explained using Figs. 8 to 10.

5 Figs. 8 to 10 are diagrams explaining examples of screen displays of the output section 406 of the document processor according to the first embodiment. More specifically, the diagrams show examples of screen displays listing types of vehicle malfunctions. In Fig. 8, the display screen displays a "numbers" column 801 showing document ID numbers, a "date
10 received" column 802 showing the date on which the malfunction information was received, a "sales office" column 803 showing the sales office where the malfunction information was received, a "vehicle type" column 804 showing the type of vehicle to which the information refers, a "year" column 805 showing the year
15 of the vehicle to which the information refers, and a "contents" column 806 showing the content of the malfunction information.

In Fig. 9, a selected region 901 is the portion displayed within the rectangle and altered in color. Similarly, in Fig. 10, the selected region 1001 is the portion displayed within
20 the rectangle and altered in color.

The region selected by the selector 403 may be one part of a column displayed on the screen as shown in Fig. 9, or, when an item name is selected as shown in Fig. 10, all the item value belonging to that item name may be selected. In the first
25 embodiment, only regions belonging to letter rows can be

selected.

Next, the process of extraction performed by the characteristics extractor 404 will be explained. An item value is selected by the selector 403, and the characteristics of the item name are extracted by the characteristics extractor 404. Fig. 11 is a diagram explaining a list of contents of extraction processing performed by the characteristics extractor 404 of the document processor according to the first embodiment.

In Fig. 11, extraction includes extracting a word contained in a letter row, the number of words, the number of letters in the word, the number of appearances of that word, etc. These are extracted using a natural language processing technique such as format element analysis or syntax analysis, generally used in devices such as a regulatory audio synthesizer device or an automated translation device.

Next, work processing performed by the work processor 405 will be explained. The work processor 405 processes the amount of characteristics extracted by the characteristics extractor 404. Fig. 12 is a diagram explaining a list of contents of work processing performed by the work processor 405 of the document processor according to the first embodiment.

Work processing comprises processing such as "classification" for classifying identical characteristics, "retrieval" for retrieving a predetermined amount of characteristics, "rearranging" for rearranging contents of the

characteristics amount, "representative extraction" for
extracting a representative value of an amount of
characteristics, "maximum value extraction" for extracting a
maximum value from an amount of characteristics, "minimum value
5 extraction" for extracting a minimum value from an amount of
characteristics, "calculation" for calculating an amount of
characteristics, and such like.

The operator can select his own combination of the
contents of characteristics extracted by the characteristics
10 extractor 404, and extracted characteristics processed by the
work processor 405. Furthermore, it is possible to preset
highly-efficient combinations, and supply these to the
operator.

The result of the processing carried out by the work
15 processor 405 is saved in a work-processing result saving
section 408 in the work processor 405. The processed result
saved in the work-processing result saving section 408 is output
from the output section 406. The output section 406 reads out
the contents of the work-processing result saving section 408,
20 and displays or prints them.

Here, an example will be explained in which the number
of appearances of a word contained in the item value is selected
as the (amount of) characteristics extracted by the
characteristics extractor 404, and classification is selected
25 as the work-processing to be carried out by the work processor

405.

In general, when there are two documents, and the incidence of appearance of words comprising the two documents are equal, it can be assumed that the meanings of the two documents are similar to each other. That is, the number of appearances of a word in a document is a characteristic having a profound relationship to the meaning of the document. Therefore, it can be envisaged that when multiple documents have been classified using the number of appearances of a word therein as a characteristic, the relevant documents having a meaning close to the classification categories will.

The analyzer 409 in the characteristics extractor 404 performs natural language analysis, such as format element analysis, to each of one or multiple item values selected by the selector 403, and divides them into words. Furthermore, information representing the part of speech of each word is appended thereto. Of the words appearing, a unique word ID is appended to those that are nouns, and the number of appearances of each word ID is counted for one item value, and for all item values selected by the selector 403.

The characteristics extractor 404 comprises a characteristic vector creator 410, which creates an item value characteristic vector showing the (amount of) characteristics of individual item values based on the number of appearances counted. For example, Fig. 13 shows the characteristic vectors

for each item value when the item values selected by the selector
403 are:

"Large noise pollution"
"Vehicle paint changes color"
5 "Overheat occurs"
"Paint is peeling"
"Battery is dead"
"Black exhaust fumes"

Furthermore, Fig. 14 shows the words and the number of
10 appearances of each of the word IDs those words.

Hence, the following characteristic vectors were
obtained:

"Large noise pollution" : {1, 1, 1, 0, 0, 0, 0, 0, 0, 0, 0, 0,
0}
15 "Vehicle paint changes color" : {0, 1, 0, 1, 1, 1, 0, 0, 0, 0,
0, 0, 0}
"Overheat occurs" : {0, 1, 0, 0, 0, 0, 1, 1, 0, 0, 0, 0, 0}
"Paint is peeling" : {0, 1, 0, 1, 0, 0, 0, 0, 1, 0, 0, 0, 0}
"Battery is dead" : {0, 1, 0, 0, 0, 0, 0, 0, 0, 1, 1, 0, 0}
20 "Black exhaust fumes" : {0, 1, 0, 0, 0, 0, 0, 0, 0, 0, 0, 1,
1}.

The characteristic vectors of these item values are
output from the characteristics extractor 404 and sent to the
work processor 405. The work processor 405 classifies the
25 documents using the characteristic vectors of the item values.

Firstly, the distances between the individual vectors are calculated. For example, the distances can be measured using their inner products.

After the distance have been calculated, the vectors with the nearest distances are gathered together. For example, a K-means method is used to classify a group of vectors into K numbers of vector groups in correspondence with the distances thereof. When the vectors have been classified, the work processor 405 appends numbers showing which classification the vectors belong with respect to their item values, that is, cluster numbers, and document IDs corresponding to the item values, and sends the result to the output section 406, where they are displayed.

Fig. 15 shows an example of a screen display of cluster number 1501. Documents which have the same cluster number (for example, documents "1" and "6", both have the cluster number "5") belong to the same classification group.

Next, an arrangement of a second aspect of the present invention in which a cross table is output will be explained. After the input section 401 has read out a cluster of documents to be analyzed, the operator inputs commands indicating the names of items to be classified, the names of items which will form the vertical or horizontal axis of the cross table, and the number of classifications.

Fig. 16 shows a command screen for creating a cross table.

In Fig. 16, the command screen 1600 comprises a process item name input column 1601, an axis item name column 1602, a vertical axis command button 1603, a horizontal axis command button 1604, and a classification number input column 1605.

5 The name of the item to be processed 1601 is input to the process item name input column 1601. The item name can be input from the keyboard 209 or the like, or by using the mouse 210 or the like to select an item from available items being displayed. Furthermore, the name of the item to be the vertical
10 axis is input to the axis item name column 1602. This can be input by the same method as to the process item name input column 1601.

 The vertical axis command button 1603 and the horizontal axis command button 1604 are for specifying commands to display
15 an item name to be an axis on the vertical axis or the horizontal axis. Furthermore, the number of classifications is input to the classification number input column 1605. The number of classifications can be input from the keyboard 209 or the like, or by using the mouse 210 or the like to select an item from
20 available items being displayed.

 In Fig. 16, "contents" is input to the process item name input column 1601, "vehicle type" is input to the axis item name column 1602, the horizontal axis command button 1604 is marked, and "50" is input to the classification number input column 1605.

25 This indicates that a command has been given to classify the

document cluster into "50" classifications based on the "contents" of the document cluster, and to display "vehicle type" along the horizontal axis of the cross table.

Following a command to create the cross table, classification is carried out, and the classification result is displayed in the cross table. Figs. 17 and 18 are diagrams showing cross charts displaying classification results. In the cross table 1700 of Fig. 17, the vertical axis displays "cluster 1", "cluster 2", ..., showing classifications, and the horizontal axis displays "ABC1600", "ABC1800", ..., showing vehicle types.

The vertical axis of the table, that is, the lines, correspond to clusters created by classification. The first column of each line contains letter rows showing values determined at the end of classification as preset cluster numbers. The horizontal axis of the table, that is, the columns, display non-duplicating letter rows contained in the item "vehicle name" of the document cluster. Each cell of the line "cluster 1" displays the number of the documents classified into cluster 1 in which the value of the item "vehicle type" matches the vehicle type in that column.

Here, instead of displaying numbers, the size of numbers to display the color intensity of the cell, or the area needed to paint the cell, need only be expressed. Furthermore, the columns on the far right and far left of the table show the totals

of lines and columns.

In Fig. 18, by moving a mouse pointer 1800 to a cell of the cross table 1700, pressing the mouse button of the mouse 210, or moving the cursor by operating a cursor key on the keyboard 209, and pressing a specific key, so that the content display screen 1801 near that cell is displayed, the item "contents" of the corresponding document are displayed.

The content display screen 1801 displays the number of data in the cell, the display items, cell information, and contents of the display items in the data. The cell specified by the mouse pointer 1800 displays a data number: "4", display item: "contents", cell information: "ABC2000-cluster 1", and four contents as "contents" of the display items: "exhaust is black, exhaust is black,...". Consequently, the contents of a cell can be identified simply by moving the mouse pointer to the desired cell and pressing the mouse button.

Furthermore, the items displayed in the content display screen 1801 can be updated by resetting, all the items can be displayed, and items can be selectively displayed.

The first column of each line contains letter rows showing values determined at the end of classification as preset cluster numbers. This column can be rewritten by the operator. For example, after confirming the contents of a cell by the operation described above, "cluster 1" can be rewritten as "exhaust problems." As a consequence, it is easier to grasp

the content of the information.

Furthermore, instead of inserting a letter row showing the value determined at the end of classification as a preset cluster number, it is possible to extract a letter row showing the characteristics of the cluster, and insert this into the cell. For example, this can be achieved by extracting the phrases and words which appear most frequently from the item "contents" of the document contained in cluster 1.

In Fig. 18, words such as "exhaust is black" or "exhaust" are entered into the cluster 1. Thus, by a simple operation, the operator is able to learn not only the distribution of the entire document, but also, where necessary, the detailed contents of individual documents.

Next, the constitution of the output section 406 for creating a cross table will be explained in detail. Fig. 19 is a block diagram showing a constitution of the output section 406 of the document processor according to the first embodiment. The output section 406 comprises an item value selector 1901, and a totalizer 1902, in addition to the graph-drawing section 407. Moreover, the totalizer 1902 comprises a table saving section 1903 having a memory region in correspondence with contents which are actually displayed.

In compliance with an item name (axial item name) specified by the operator as one axis of the cross table, the item value selector 1901 sequentially reads out item values from

document data stored in the document memory 402, and gathers item values which are not duplicated. Furthermore, the totalizer 1902 totalizes the document by adding a numerical value to the region corresponding to the item value of the table saving section 1903.

Next, the output sequence of a cross table will be explained. Fig. 20 is a flowchart showing an output sequence of a cross table of the document processor according to the first embodiment. In the flowchart of Fig. 20, the contents of the table saving section 1903 are initialized (Step S2001) prior to totalization.

Next, an item value produced by the item value selector 1901 is allocated to a portion of the table corresponding to the item value label (Step S2002), and a letter row expressing a cluster number is allocated to a portion corresponding to the cluster number (Step S2003).

Next, an item value corresponding to the axial item value is determined by referring to documents stored in the document memory 402 to find document ID which corresponds with the item value saved in the work-processing result saving section 408 (Step S2004). Thereafter, 1 is added to the contents of the corresponding region in the table saving section 1903 (Step S2005).

It is then determined whether all the item values have been processed (Step S2006), and if not (NO in the Step S2006),

the sequence shifts back to the Step S2004, and the processes between the Steps S2004 to S2006 are repeated.

When it has been determined in the Step S2006 that processor has been carried out for all the item values (YES in the Step S2006), the total number of lines is calculated to be displayed in the far right row (Step S2007), and simultaneously, the total number of columns is calculated to be displayed in the bottom line (Step S2008).

Thereafter, a table formed in the table saving section 1903 is sequentially read out (Step S2009), whereby all processing ends.

Data output from the work processor 405 can be sent to the document memory 402, and stored there with other data in the document memory 402. Data which have been output from the work processor 405 and stored in the document memory 402 can be displayed by the output section 406 as a new row of the table. Furthermore, existing rows of the table can be deleted, and replaced by writing the new data.

In this constitution, the result of the processing, being the data output from the work processor 405, can be handled on an equality with other data which was not processed this time in the document memory 402. In subsequent analysis, the data can be selected for work processing without needing to distinguish whether it was present in the original input data, or was created by the work processor 405 during analysis.

Therefore, the data to be work processed and the contents of the work processing can be flexibly selected in accordance with the type of data, and the contents of the information analysis to be performed, enabling a wide variety of information to be analyzed with high precision.

Furthermore, it is possible to input to the work processor not only data output from the characteristics extractor 404, but also data selected by the selector 403. Consequently, additional work processing can be carried out to data whose characteristics do not need to be extracted from the letter row, and to numerical values of the work processed result, enabling an even wider variety of information to be analyzed with high precision.

Figs. 21 to 24 are diagrams explaining other examples of display screens of the output section 406 of the document processor according to the first embodiment. In Fig. 21, a "cluster number" 2101 obtained by classification is displayed in addition to "number", "date received", "sales office", "vehicle type", "year", and "contents".

Moreover, in Fig. 21, the selector 403 has selected "cluster number" 2101, and data relating to the "cluster number" 2101 is displayed in inverse video. When the "cluster number" 2101 is indicated using a key, the work processor 405 rearranges the data.

Fig. 22 shows the result of the rearrangement. In Fig.

22, documents having a "cluster number" of "1" have been collected and displayed. Thereafter, documents having a "cluster number" of "2" are collected and displayed.

More specifically, the documents are rearranged in a sequence of "numbers" "2", "11", "15", "23", "35", "54", "63", "73", and "82", which have a "cluster number" of "1". Thereafter, "numbers" "14", "18", "22", "27", "37",, which have a "cluster number" of "2", are displayed.

Next, documents whose items in the "vehicle type" column belong to "cluster number" of "1" are selected. In Fig. 23, the items in the "vehicle type" column which belong to "cluster number" of "1" have been selected, and the selected region 2301 is displayed in inverse video. In this way, since the document have already been rearranged according to their "cluster number", and documents belonging to the same cluster have been gathered and displayed, they can easily be selected as a continuous region on the screen.

Next, Fig. 24 shows a bar graph of the incidence of generation of the separate vehicle types in the selected region 2301. In Fig. 24, the bar graph display region 2401 displays the nine selected documents whose "cluster number" is "1", selected in the selection region 2301. These nine documents are displayed in the bar graph according to their vehicle type.

In this way, the documents to be work processed can be flexibly and easily selected, and various kinds of processes

can be carried out thereto. Furthermore, the processed result can be processed again in the next processing, enabling information to be analyzed at high precision.

Here, the characteristics of the letter rows which have
5 been classified or the like are extracted, and are processed in a variety of ways after work processing using the characteristics. However, a variety of processing may alternatively be performed in advance.

For example, it is possible to select the item "vehicle
10 type", rearrange the documents using this as a key, and classify the collected vehicle types according to, for example, "ABC1600". Furthermore, when a document input by the input section 401 contains errors such as misspellings, it is possible to retrieve the letter row and replace the errors prior to
15 extracting the characteristics of the classified letter row and carrying out work processing using these characteristics, thereby adjusting the data to obtain a more accurate result.

Fig. 25 is a block diagram showing a detailed constitution of the document memory 402 of the document processor according
20 to the first embodiment. In Fig. 25, the document memory 402 comprises a set value memory 2501, and a set value transceiver 2502. The set value memory 2501 comprises memories, starting with a classification data memory 2503, for storing information relating to various set values, that is, set values needed for
25 operations of the document processor. Consequently, the

information relating to the set values can be stored together with the document information.

Furthermore, the set value transceiver 2502 transmits information relating to the set values stored in the set value memory 2501 to other information processors. Furthermore, the set value transceiver 2502 receives the information relating to the set values from other information processors. Information relating to set values is received by the set value transceiver 2502, and is stored in the set value memory 2501.

Stored information relating to set values is read out simultaneous to the subsequent second reading of the document, and is stored in the set value memory 2501. The operator can refer to the information relating to the set values by a predetermined operation, and it can be reused in subsequent processing. Consequently, the information relating to set values can be saved and managed together with the documents, thereby preventing loss of the information relating to the set value, and enabling appropriate set values to be reused later.

Figs. 26 to 28 are diagrams explaining other examples of screen displays of the output section 406 of the document processor according to the first embodiment. In Fig. 26, firstly, the operator selects the "contents" to be classified on the display screen. Consequently, the selected region 2601 is displayed in inverse video. Next, when the classification button 2603 is selected from a menu bar 2603, a question screen

2604 appears asking the number of classifications required, that is, the number of documents to be classified.

When the operator enters the number of classifications into the question screen 2604, information relating to the
5 number of classifications is stored in the document memory 402. In Fig. 26, "50" is input as the number of classifications.

Thereafter, when the operator completes the analysis of the information, and presses a save button (not shown in the diagram) which pops up on the screen after selecting the file
10 button 2605 of the menu bar 2603, the document memory 402 stores the information of the document together with the classification result after appending a file name specified by the operator.

In Fig. 27, when the mouse pointer 2702 is moved to a column
15 2701 displaying the classification result, and the mouse button is pressed, a classification information display screen 2703 displays the information relating to classification used in the classification, and information relating to the classification set value. As a consequence, relevance of the set value used
20 can be easily understood.

The information relating to classification, displayed on the classification information display screen 2703, for example comprises "classification date" showing information relating to the time and date on which classification was carried out,
25 "number of documents" showing information relating to the

number of documents that were classified, etc. Furthermore,
the information relating to the classification set value
comprises information such as "classification number" showing
the number of classified documents, and "classification speech
5 part" showing which part of speech the classification was based
on.

A new table is created for each classification. Fig. 28
shows a second classification result displayed after
classification has been carried out a second time after
10 obtaining the first classification result. When the operator
wishes to display the first classification result again, he or
she moves the mouse pointer to the selection region 2801 on the
label at the bottom left of the screen, and presses the mouse
button. As a consequence, the first classification result is
15 displayed again. Thereafter, the second classification result
can be displayed again by performing the same operation.

Furthermore, in Fig. 28, information relating to the set
value used in the classifications are displayed in a
predetermined display region 2802 of the table. The display
20 region 2802 does not conceal the classification result display,
and the position of the display can be moved. Consequently,
the relationship between the classification result and the set
value can easily be understood.

Next, a sequence of document processing of the document
25 processor according to the first embodiment will be explained.

Fig. 29 is a flowchart showing a document processing sequence of the document processor according to the first embodiment.

In the flowchart of Fig. 29, when starting the process, it is determined whether the document data has been input to the document processor (Step S2901). Here, the document processor waits for the document data to be input, and when the document data has been input (YES in Step S2901), the input document data is stored (Step S2902). The Steps S2901 and S2902 may be carried out independently of other steps each time document data is input.

Next, it is determined whether all or part of the stored document data has been selected (Step S2903). Here, the document processor waits for all or part of the document data to be selected, and when document data has been selected (YES in Step S2903), data relating to letter row characteristics of all or part of the stored document data is extracted (Step S2904).

Thereafter, in the Step S2904, predetermined work processing, such as classification, is carried out based on the extracted data relating to the letter row characteristics (Step S2905). Following this, data which were work-processed in the Step S2905 are output in a table format or the like (Step S2906).

Moreover, the data which were work-processed in the Step S2905 are stored in correspondence with the original document data (Step S2907). Furthermore, data relating to contents of

the work processing such as the set value of the work processing are simultaneously stored (Step S2908).

Thereafter, it is determined whether all or part of the data processed in the Step S2905 has been selected (Step S2908).

5 When the data has been selected (YES in the Step S2908), the sequence shifts to the Step S2904, and thereafter, the processes from the Step S2904 to S2909 are repeated. On the other hand, when it is determined that all or part of the data processed in the Step S2909 has not been selected (NO in the Step S2909),
10 all processing ends.

The document processing explained in the first embodiment can be realized using a program prepared in advance on a computer, such as a personal computer or a work station. This program is recorded on a computer-readable recording medium such as a
15 hard disk, a floppy disk, a CD-ROM, an MO, or a DVD, and is executed by reading out the program from the recording medium using the computer. Furthermore, the program can be distributed via the recording medium, or by using a network such as the Internet as a transmission medium.

20 Next, an information classification device according to a second to sixth embodiments will be explained. In the second to sixth embodiments described below, multiple classifications are carried out while varying parameters (number of clusters and document clusters to be classified, standards of similarity,
25 stop words, etc.) for document classification, extraction, and

positioning of a topic (content) from one cluster of documents,
based on the same interpretation as above, namely that a
document cluster includes a great amount of noise. By providing
means for saving and integrating the results, it is possible
5 to gradually determine what kind of contents are contained in
a given document cluster.

Since the information processing system comprising the
document classification device according to the second
embodiment of the present invention is the same as the first
10 embodiment shown in Fig. 1, further explanation will be omitted.
Furthermore, since the hardware constitution of the server 101
and the clients 102 is the same as the first embodiment shown
in Figs. 2 and 3, in order to avoid repetition, their explanation
will be omitted.

15 Next, the functional constitution of a document
classification device according to the second embodiment will
be explained. Fig. 30 is a block diagram showing a functional
constitution of the document classification device according
to the second embodiment.

20 As shown in the block diagram of Fig. 30, the document
classification device comprises an input section 3001, a
language analyzer 3002, a vector creator 3003, a classifier 3004,
a classification parameter specifier 3005, a classification
result memory 3006, a cluster characteristics display 3007, a
25 cluster characteristics calculator 3008, a classification

category memory 3009, a cluster selection specifier 3010, and a classification category viewing operator 3011.

The input section 3001, the language analyzer 3002, the vector creator 3003, the classifier 3004, the classification parameter specifier 3005, the classification result memory 3006, the cluster characteristics display 3007, the cluster characteristics calculator 3008, the classification category memory 3009, the cluster selection specifier 3010, and the classification category viewing operator 3011 are controlled by command processing of a CPU 201, a CPU 301, and the like, in compliance with commands written in programs recorded in recording media such as a ROM 202, a ROM 302, a RAM 203, a RAM 303, or a disk device 306, and a hard disk 316.

Here, the input section 3001 inputs document data, and for example comprises an I/F 204, or an I/F 309, or the like, capable of obtaining documents and groups of documents via keyboards 209 or 311, a scanner 313 comprising an OCR function, and a network 103.

Furthermore, in addition to the above, if the input section 3001 is capable of extracting document data, it may comprise all the above parts. For example, when the document data is saved in a data base, and the medium in which the data base is stored is provided in the document processor of the first embodiment, document data is input.

Furthermore, the language analyzer 3002 obtains

language-analyzed information by analyzing document data input
by the input section 3001. The vector creator 3003 creates a
document characteristics vector for the document data, based
on the language-analyzed information obtained from the language
5 analyzer 3002.

Furthermore, the classifier 3004 classifies documents
based on the degree of similarity between document
characteristic vectors created by the vector creator 3003, and
creates clusters of documents. The classification parameter
10 specifier 3005 specifies classification parameters, and for
example comprises the I/F 204 or 309, or the like, capable of
obtaining documents and groups of documents via the keyboards
209 or 311, the mouses 210 or 312, or the network 103.

Furthermore, the classification result memory 3006
15 stores the classification result obtained by the classifier
3004, that is, information relating to clusters of classified
documents. Furthermore, the cluster characteristics display
3007 displays cluster characteristics calculated by the cluster
characteristics calculator 3008.

20 The cluster characteristics calculator 3008 calculates
cluster characteristics, which are characteristics of document
clusters created by the classifier 3004. Furthermore, the
classification category memory 3009 stores the cluster
characteristics, calculated by the cluster characteristics
25 calculator 3008, as constitution elements of classification

categories. Furthermore, the classification category memory 3009 stores clusters of documents, selected by the cluster selection specifier 3010, as constitution elements of classification categories. That is, it stores all or some of the documents belonging to clusters selected by the cluster selection specifier 3010 as constitution elements of classification categories.

The cluster selection specifier 3010 selects desired clusters from among the multiple cluster characteristics displayed by the cluster characteristics display 3007. Furthermore, the cluster selection specifier 3010 selects desired clusters of document from among the clusters of documents created by the classifier 3004. Furthermore, the classification category viewing operator 3011 controls viewing of data stored in the classification category memory 3009.

Next, there will be explained an appropriate example in which it is important to extract a topic (contents) contained in a document cluster, by imagining an analysis of free responses collected through a questionnaire or the like.

In recent years, it has become possible to collect thousands to tens of thousands of free responses in a short period of time via the Internet or the like. Using this function, a large amount of textual information can be gathered.

As an example of a large amount of textual information collected through a questionnaire or the like, documents

containing written answers given in response to the question:
"Please give an example of wasteful office networking". A
document cluster is a cluster of single responses.

Here, the operator (the questionnaire analyzer) may want
5 to know a summary of the opinions expressed, that is, what type
of opinions (topics) are contained in the cluster of opinions
(document cluster). To fulfil this requirement, the topic is
extracted by gathering together (classifying) similar opinions,
so as to extract information relating to the kind of opinions
10 that are contained in the result of the questionnaire.

Document classification typically comprises the
following three clearly divided steps. In the first Step, the
language analyzer 3002 extracts words (or specific continuous
rows of letters) contained in each of the documents (opinions)
15 input by the input section 3001. At this time, for example,
a language analysis algorithm such as a format element sign is
used.

In the second Step, a "word" x "document" matrix is
created using the extracted words as rows, the documents as
20 lines, and the word incidence as components. In addition to
word extraction using language analysis tools having a format
element analysis function and a syntax analysis function, other
information such as speech-part information, phrases, and
syntax information, can be obtained simultaneously, and can be
25 considered when creating the above "word" x "document" matrix.

Based on the "word" x "document" matrix, the vector creator 3003 expresses the documents as vectors in multidimensional space comprising words. This is accomplished by one of the following methods, all of which are implemented
5 in the embodiments of the present invention.

(1) use the row elements of the matrix directly;

(2) append values representing the importance of the documents after considering the length of the documents (number of letters, number of pages, etc.) and the incidence of the words
10 in all the classified clusters;

(3) calculate an inner product matrix between documents from the above matrix, and apply specific value analysis (for example, by using factor analysis or main element analysis, third-type quantified logic, and the like), to form dormant
15 meaningful space.

Furthermore, it is also possible to use the method described in "Representing documents using an explicit model of their similarities" (Authors: Brian T. Bartell, Garrison W. Cottrell, and Richard K. Belew; Paper Title: Journal of the
20 American Society for Information Science; Academic Body: The American Society for Information Science; Pages: 254-271, Vol. 46 No. 4; Year of Publication: 1995)", wherein the method for converting to dormant meaningful space is generalized, and joint reference information and the like, created from
25 reference information of the document for other documents, is

appended to the inner product matrix between documents, and this matrix is used to lead out expression space conversion coefficients for projecting documents and words to space reflecting their similarities.

5 In the third Step, the classifier 3004 classifies the documents using the degree of similarity of the document characteristic vectors. More specifically, the documents are classified by a method such as square contingency, discriminatory analysis, or clustering.

10 Furthermore, the degree of similarity may be measured by the inner product, the cosine, the Euclidean distance, the Mahalanobis distance, or the like. Any of these methods can be used in the present embodiment.

15 Furthermore, there are many conventionally known clustering algorithms. Clustering is generally divided into layered clustering and non-layered clustering, but either can be used in the present embodiment.

20 Furthermore, the classification parameter specifier 3005 specifies classification parameters to enable the classifier 3004 to classify the document characteristic vectors. The classifier 3004 classifies the document characteristic vectors it is saving, in compliance with classification parameters specified by the classification parameter specifier 3005.

25 Thus, when the first document classification, comprising the processes of the first to third Steps, has ended, the

classification result memory 3006 stores the classification result.

Following this, the cluster characteristics calculator 3008 calculates characteristics showing what kind of clusters have been obtained in the classification result, that is, it calculates cluster characteristics. Typically, it calculates the documents, or some of the documents, belonging to each cluster, and sorts the documents based on their degree of similarity with the center of the cluster.

In addition, numerical values representing standard deviation within the cluster, showing the word with the highest incidence, the number of documents belonging to the cluster, the level of variation of documents within the cluster, are calculated to represent cluster characteristics.

The cluster information is calculated in order to inform the operator what kinds of clusters (i.e. what kind of characteristics they possess) have been output (displayed), and as long as the cluster information shows cluster characteristics to the operator, other types of contents (characteristics) than the above may be used.

Furthermore, in addition to displaying cluster characteristics as above, the cluster characteristics calculator 3008 also calculates information representing the relationship between clusters. In the case of layered clustering, the upper or lower cluster is calculated, and in

the case of non-layered clustering, adjacent clusters are calculated based on their degree of similarity to the cluster center.

Next, the cluster characteristics display of the cluster characteristics display 3007 and cluster selection will be explained. Fig. 31 is a diagram explaining an example of a display of the cluster characteristics display 3007 of the document classification device according to the second embodiment.

In Fig. 31, each cluster comprises items such as a "cluster ID" column 3101, a "number of members" column 3102, a "words of high incidence" column 3103, a "document contents" column 3104, and a "degree of similarity to center" column 3105, thereby enabling the operator to operate the display in units.

The "cluster ID" column 3101 displays serial numbers showing the cluster IDs. The "number of members" column 3102 displays the calculated number of documents, or some of the documents, belonging to the cluster. The words having the highest incidence in these documents are extracted and displayed in the "words of high incidence" column 3103. The contents of the documents are displayed in the "document contents" column 3104, and the degree of similarity to the center is expressed in numerical form and displayed in the "degree of similarity to center" column 3105. This makes it easier for the operator to understand the information.

The operator can detect the characteristics of the clusters based on the information (amount of characteristics) displayed. Here, when there is one cluster whose contents (characteristics) can be understood, it can be selected by the
5 cluster selection specifier 3010.

More specifically, by moving the cursor 3110 to a predetermined position of the displayed cluster, for example to the "cluster ID" column 3101 using the mouse 210 or 312 or the like, and clicking on that position, the entire cluster of
10 that cluster ID can be selected. It is acceptable to select some, rather than all, of the documents belonging to the selected cluster.

In Fig. 31, the "cluster ID" column 3101 has been clicked, whereby the entire cluster is displayed in inverse video, and
15 the cluster (cluster ID "1") is selected.

Furthermore, when there is no cluster with comprehensible contents, the operator resets the classification parameters using the classification parameter specifier 3005, and executes another classification.

20 Data relating to the cluster ID selected by the cluster selection specifier 3010 is transmitted to the classification category memory 3009. The classification category memory 3009 retrieves and stores the above amount of characteristics from the cluster characteristics calculator 3008, based on the data
25 relating to the cluster ID.

Similarly, the classification category memory 3009 retrieves and stores the classification result from the classification result memory 3006. Moreover, the classification category memory 3009 can simultaneously store information representing comments (e.g. "network maintenance cost is high") about clusters input by the operator. Storing information created by the operator as constituent elements of the classification category in this way increases the utilizable value of the classification category.

When an interface for other viewing operations is provided, data stored in the classification category memory 3009 can be structured and categorized manually, or automatically by using the degree of similarity of the stored clusters to the cluster center, while viewing contents of selected and stored clusters, and pinpointing meaningful connections therebetween.

Next, a processing sequence of the document classification device according to the second embodiment will be explained. Fig. 32 is a flowchart showing a processing sequence of the document classification device according to the second embodiment. In the flowchart of Fig. 32, firstly, the document to be classified is input (Step S3201).

Next, the language of the input document is analyzed (Step S3202), a document characteristic vector is created based on the result of the analysis, that is, based on the extracted words

(Step S3203).

Thereafter, the process waits for a classification parameter to be specified, and when a classification parameter has been specified (YES in Step S3204), the document is
5 classified in compliance with the specified classification parameter (Step S3205), and the result, that is, information relating to the clusters, is stored (Step S3206).

Next, the characteristics of the classified clusters are calculated (Step S3207), and the calculated results are
10 displayed (Step S3208). It is determined whether any of the displayed clusters has been selected (Step S3209), and if not (NO in the Step S3209), processing shifts to the Step S3204 and waits once more for a classification parameter to be specified (Step S3204).

15 On the other hand, when it is determined in the Step S3209 that a cluster has been selected (YES in the Step S3209), a classification category for the selected cluster is created and stored (Step S3210). At this time information relating to clusters input by the operator can also be stored. Here, the
20 processing series ends.

As described above, according to the document classification device of the second embodiment, an expression space conversion coefficient, for converting the documents to expression space capable of projecting the meaningful
25 connections between the documents, is calculated based on the

degree of similarity between documents in document clusters to be classified, and the documents are classified in the expression space. Consequently, the documents can be classified in a manner that reflects the intentions of the operator.

Therefore, clusters can be obtained from the classifier 3004, and in addition, the clusters can be structured and categorized based on their contents by the cluster characteristics calculator 3008 and the classification category memory 3009, using the degree of similarity of the clusters to the cluster center and the like.

Furthermore, it is possible to structure and categorize clusters closer to the intentions of the operator by using only the clusters selected by the cluster selection specifier 3010.

In addition to the second embodiment described above, a vector memory and a vector corrector may be added to the constitution as in the third embodiment described below.

Since the information processing system comprising the document classification device according to the third embodiment of the present invention is the same as the first embodiment shown in Fig. 1, further explanation will be omitted. Furthermore, since the hardware constitutions of the server 101 and the clients 102 are the same as the first embodiment shown in Figs. 2 and 3, explanation thereof will be omitted.

Next, the functional constitution of a document

classification device according to the third embodiment will be explained. Fig. 33 is a block diagram showing a functional constitution of the document classification device according to the third embodiment. In Fig. 33, like members to those in
5 Fig. 30 of the second embodiment are represented by like reference symbols, and explanation thereof is omitted.

In the block diagram of Fig. 33, the document classification device comprises an input section 3001, a language analyzer 3002, a vector creator 3003, a classifier 3004,
10 a classification parameter specifier 3005, a classification result memory 3006, a cluster characteristics display 3007, a cluster characteristics calculator 3008, a classification category memory 3009, a cluster selection specifier 3010, a classification category viewing operator 3011, a vector memory
15 3301, and a vector corrector 3302.

The vector memory 3301 stores document characteristic vectors created by the vector creator 3003. Furthermore, the vector corrector 3302 corrects document characteristic vectors, stored in the document characteristic vector memory 3301, by
20 deleting document characteristic vectors of documents belonging to the portion of clusters selected by the cluster selection specifier 3010.

Furthermore, the classifier 3004 classifies the documents based on the document characteristic vectors
25 corrected by the vector corrector 3302.

The vector memory 3301 and the vector corrector 3302 are controlled in accordance with commands from the CPU 201 and 301, and the like, in compliance with commands written in programs recorded in recording media such as a ROM 202 and 302, a RAM 203 and 303, or a disk device 306, and a hard disk 316.

The document characteristic vectors (row vectors) and word (word characteristics) vectors (line vectors) are created in the vector creator 3003, and stored in the vector memory 3301. This is in order to secure the document characteristic vectors to be used in subsequent classifications.

The vector corrector 3302 deletes all or some of the documents belonging to the clusters selected by the cluster selection specifier 3010, so that these documents are also deleted from subsequent classifications. The deleted document characteristic vectors are stored in the vector memory 3301.

As a result, of the vector data being stored in the vector memory 3301, the data to be used in subsequent classifications are those whose document (or a part thereof, as specified by the operator) row vectors belong to the selected clusters.

Next, a processing sequence of the document classification device according to the third embodiment will be explained. Fig. 34 is a flowchart showing a processing sequence of the document classification device according to the third embodiment. In the flowchart of Fig. 34, firstly, the document to be classified is input (Step S3401).

Next, the language of the input document is analyzed (Step S3402), a document characteristic vector is created based on the result of the analysis, that is, based on the extracted words (Step S3403), and the created document characteristic vectors
5 are stored (Step S3404).

Thereafter, the process waits for a classification parameter to be specified, and when a classification parameter has been specified (YES in Step S3405), the document is classified in compliance with the specified classification
10 parameter (Step S3406), and the result, that is, information relating to the clusters, is stored (Step S3407).

Next, the characteristics of the classified clusters are calculated (Step S3408), and the calculated results are displayed (Step S3409). It is determined whether any of the
15 displayed clusters has been selected (Step S3410), and if not (NO in the Step S3410), the processing shifts to the Step S3405 and waits once more for a classification parameter to be specified (Step S3405).

On the other hand, when it is determined in the Step S3410
20 that a cluster has been selected (YES in the Step S3410), a classification category for the selected cluster is created and stored (Step S3411). At this time information relating to clusters input by the operator can also be stored. Thereafter, it is determined whether a repeat of the processing has been
25 specified (Step S3412).

In the Step S3412, when a repeat of the processing has been specified (YES in Step S3412), all or some of the documents belonging to the selected clusters are deleted by document characteristic vector correction (Step S3413). Thereafter, the processing shifts to the Step S3405, and all the processes from the Steps S3405 to S3413 are repeated.

On the other hand, in the Step S3412, when a repeat of the processing has not been specified (NO in the Step S3412), the processing series ends.

As described above, according to the document classification device of the third embodiment, the vector memory 3301 creates a new cluster in which the effects of clusters which are already known is removed.

In the third embodiment described above, a vector memory and a vector corrector are added to the constitution, but a document expression space corrector may be added instead of the vector corrector, as in a fourth embodiment described below.

Since the information processing system comprising the document classification device according to the fourth embodiment of the present invention is the same as the first embodiment shown in Fig. 1, further explanation will be omitted. Furthermore, since the hardware constitutions of the server 101 and the clients 102 are the same as the first embodiment shown in Figs. 2 and 3, in order to avoid repetition, their explanation will be omitted.

Next, the functional constitution of a document classification device according to the fourth embodiment will be explained. Fig. 35 is a block diagram showing a functional constitution of the document classification device according to the fourth embodiment. In Fig. 35, like members to those in Fig. 30 of the second embodiment are represented by like reference symbols, and explanation thereof is omitted.

In the block diagram of Fig. 35, the document classification device comprises an input section 3001, a language analyzer 3002, a vector creator 3003, a classifier 3004, a classification parameter specifier 3005, a classification result memory 3006, a cluster characteristics display 3007, a cluster characteristics calculator 3008, a classification category memory 3009, a cluster selection specifier 3010, a classification category viewing operator 3011, a vector memory 3501, and a document expression space corrector 3502.

The vector memory 3501 stores document characteristic vectors created by the vector creator 3003. Furthermore, the document expression space corrector 3502 corrects the document expression space, used when determining the degree of similarity between document characteristics vectors stored in the document characteristic vector memory 3501, based on an amount of characteristics calculated from the portion of clusters selected by the cluster selection specifier 3010.

Furthermore, the classifier 3004 classifies the

documents using the document expression space corrected by the document expression space corrector 3502, based on the degree of similarity between the document characteristic vectors created by the vector creator 3003.

5 The vector memory 3501 and the document expression space corrector 3502 are controlled in accordance with commands from the CPU 201 and 301, and the like, in compliance with commands written in programs recorded in recording media such as a ROM 202 and 302, a RAM 203 and 303, or a disk device 306, and a hard
10 disk 316.

Next, the contents of the document expression space corrector 3502 will be explained. In the vector corrector 3302 in the third embodiment, document characteristic vectors were deleted to eliminate the effects of clusters that were already
15 known, but the multidimensional space in which the document characteristic vectors are expressed was not altered.

Therefore, when format characteristics of clusters selected by the operator in the previous classification are to be eliminated from the next classification, the space in which
20 the document characteristic vectors are expressed must itself be altered.

The document expression space corrector 3502 is provided for this purpose, and corrects the document expression space. Here, as example where the characteristic dimensions of the
25 document expression space is altered by deleting the

characteristic dimension having a high degree of similarity with the center of a cluster selected by the operator.

Since the center of a cluster selected by the operator can be expressed as a vector, the degree of similarity between this cluster center vector and the characteristic dimensions of the document expression space stored in the vector memory 3501 is calculated, so as to identify the characteristic dimensions with a high degree of similarity.

The cosine, inner product, the Euclidean distance, the Mahalanobis distance, or the like, is used to measure the degree of similarity. Furthermore, characteristic dimensions with a high degree of similarity can be identified by threshold value processing, in which characteristic dimensions with a degree of similarity exceeding a certain degree of similarity are deleted, or fixed-number processing, in which a fixed number of characteristic dimensions with a high degree of similarity are deleted. Furthermore, discriminatory analysis or the like can be performed.

The document express space corrector 3502 deletes the characteristic dimensions after calculating those which are to be deleted. Deletion is carried out by deleting the line vectors of characteristic dimensions identified from a matrix of "characteristic dimensions (words)" x "documents" stored in the vector memory 3501. The document vectors corrected by the document express space corrector 3502 are stored in the vector

memory 3501 to be used in subsequent classifications.

Next, a processing sequence of the document classification device according to the fourth embodiment will be explained. Fig. 36 is a flowchart showing a processing
5 sequence of the document classification device according to the fourth embodiment. In the flowchart of Fig. 36, firstly, the document to be classified is input (Step S3601).

Next, the language of the input document is analyzed (Step S3602), a document characteristic vector is created based on
10 the result of the analysis, that is, based on the extracted words (Step S3603), and the created document characteristic vectors are stored (Step S3604).

Thereafter, the process waits for a classification parameter to be specified, and when a classification parameter
15 has been specified (YES in Step S3605), the document is classified in compliance with the specified classification parameter (Step S3606), and the result, that is, information relating to the clusters, is stored (Step S3607).

Next, the characteristics of the classified clusters are
20 calculated (Step S3608), and the calculated results are displayed (Step S3609). It is determined whether any of the displayed clusters has been selected (Step S3610), and if not (NO in the Step S3610), the processing shifts to the Step S3605 and waits once more for a classification parameter to be
25 specified (Step S3605).

On the other hand, when it is determined in the Step S3610 that a cluster has been selected (YES in the Step S3610), a classification category for the selected cluster is created and stored (Step S3611). At this time, information relating to clusters input by the operator can also be stored. Thereafter, it is determined whether a repeat of the processing has been specified (Step S3612).

In the Step S3612, when a repeat of the processing has been specified (YES in Step S3612), the document expression space is corrected by deleting the line vectors of the characteristic dimensions identified from the matrix "characteristic dimensions (words)" x "documents" (Step S3613). Thereafter, the processing shifts to the Step S3605, and all the processes from the Steps S3605 to S3613 are repeated.

On the other hand, in the Step S3612, when a repeat of the processing has not been specified (NO in the Step S3612), the processing series ends.

As described above, according to the document classification device according to the fourth embodiment, format characteristics of a cluster selected by the operator in a previous classification can be deleted from subsequent classifications by the document express space corrector 3502, enabling a new cluster to be created in the deleted state.

In the third and fourth embodiments described above, either one of a vector corrector and a document express space

corrector are added to the constitution, but both the vector corrector and the document expression space corrector may be added instead of the vector corrector, as in a fifth embodiment described below.

5 Since the information processing system comprising the document classification device according to the fifth embodiment of the present invention is the same as the first embodiment shown in Fig. 1, further explanation will be omitted. Furthermore, since the hardware constitutions of the server 101 and the clients 102 are the same as the first embodiment shown in Figs. 2 and 3, in order to avoid repetition, their explanation will be omitted.

Next, the functional constitution of a document classification device according to the fifth embodiment will be explained. Fig. 37 is a block diagram showing a functional constitution of the document classification device according to the fifth embodiment. In Fig. 37, like members to those in Fig. 30 of the second embodiment are represented by like reference symbols, and explanation thereof is omitted.

20 In the block diagram of Fig. 37, the document classification device comprises an input section 3001, a language analyzer 3002, a vector creator 3003, a classifier 3004, a classification parameter specifier 3005, a classification result memory 3006, a cluster characteristics display 3007, a cluster characteristics calculator 3008, a classification

category memory 3009, a cluster selection specifier 3010, a classification category viewing operator 3011, a vector memory 3701, a vector corrector 3702, and a document expression space corrector 3703.

5 The vector memory 3701 stores document characteristic vectors created by the vector creator 3003. Furthermore, the vector corrector 3702 corrects the document characteristic vectors, stored in the document characteristic vector memory 3301, by deleting document characteristic vectors of documents
10 belonging to the portion of clusters created by the classifier 3004.

 Furthermore, the document expression space corrector 3703 corrects the document expression space, used when determining the degree of similarity between document
15 characteristics vectors stored in the document characteristic vector memory 3701, based on the characteristics of clusters selected by the cluster selection specifier 3010.

 Furthermore, the classifier 3004 classifies the documents based on the degree of similarity between document
20 characteristic vectors corrected by the vector corrector 3702, using the document expression space corrected by the document expression space corrector 3703.

 The vector memory 3701, the vector corrector 3702, and the document expression space corrector 3703 are controlled in
25 accordance with commands from the CPU 201 and 301, and the like,

in compliance with commands written in programs recorded in recording media such as a ROM 202 and 302, a RAM 203 and 303, or a disk device 306, and a hard disk 316.

Next, the contents of the vector corrector 3702 and the document expression space corrector 3703 will be explained. In the fourth embodiment, documents belonging to a selected cluster are used in subsequent classifications.

In the fifth embodiment, since the vector corrector 3702 and the document expression space corrector 3703 are both provided, documents belonging to selected clusters are deleted from subsequent classifications, and are not classified in subsequent classifications.

In the fourth embodiment, the aspect of topic extraction is emphasized, and it is assumed that a given document can be classified under multiple topics. For example, in an investigation into networking, the following answer is given: "The end user enquires about how to install the software, and so cannot work as a system manager.". This can be classified under the topic of "difficulties relating to understanding the software operation", but can also be classified under the topic of "busy nature of system manager work".

The fourth embodiment addresses the need to be able to extract both the cluster "difficulties relating to understanding the software operation" and the cluster "busy nature of system manager work".

Conversely, since the operator already knows topics which have been extracted once, there will be cases when he or she desires a different result from the next classification. The fifth embodiment addresses this requirement by providing the vector corrector 3702, thereby ensuring that all or part of documents belonging to clusters selected in the nth classification are deleted from subsequent classifications.

Documents belonging to clusters which have been specified for selection by the cluster selection specifier 3010 are stored in row vector format in the vector memory 3701. Therefore, document clusters for subsequent classification are created by deleting these row vectors using the vector corrector 3702.

Moreover, as in the fourth embodiment, in accordance with the selected clusters, the document expression space corrector 3703 deletes the characteristic dimension from the matrix stored in the vector memory 3701.

Next, a processing sequence of the document classification device according to the fifth embodiment will be explained. Fig. 38 is a flowchart showing a processing sequence of the document classification device according to the fifth embodiment. In the flowchart of Fig. 38, firstly, the document to be classified is input (Step S3801).

Next, the language of the input document is analyzed (Step S3802), a document characteristic vector is created based on the result of the analysis, that is, based on the extracted words

(Step S3803), and the created document characteristic vector is stored (Step S3804).

Thereafter, the process waits for a classification parameter to be specified, and when a classification parameter has been specified (YES in Step S3805), the document is classified in compliance with the specified classification parameter (Step S3806), and the result, that is, information relating to the clusters, is stored (Step S3807).

Next, the characteristics of the classified clusters are calculated (Step S3808), and the calculated results are displayed (Step S3809). It is determined whether any of the displayed clusters has been selected (Step S3810), and if not (NO in the Step S3810), the processing shifts to the Step S3805 and waits once more for a classification parameter to be specified (Step S3805).

On the other hand, when it is determined in the Step S3810 that a cluster has been selected (YES in the Step S3810), a classification category for the selected cluster is created and stored (Step S3811). At this time, information relating to clusters input by the operator can also be stored. Thereafter, it is determined whether a repeat of the processing has been specified (Step S3812).

In the Step S3812, when a repeat of the processing has been specified (YES in Step S3812), all or some of the documents belonging to the selected clusters are deleted by document

characteristic vector correction (Step S3813).

Following the Step S3813, the document expression space is corrected by deleting the line vectors of the characteristic dimensions identified from the matrix "characteristic dimensions (words)" x "document" (Step S3814). Thereafter, the processing shifts to the Step S3805, and all the processes from the Steps S3805 to S3814 are repeated.

On the other hand, in the Step S3812, when a repeat of the processing has not been specified (NO in the Step S3812), the processing series ends.

As described above, according to the document classification device of the fifth embodiment, the vector corrector 3702 eliminates the effects of clusters which are already known, and in addition, the document expression space corrector 3703 eliminates the format characteristics of a cluster selected by the operator in a previous classification from subsequent classifications, thereby enabling a new cluster to be created in the deleted state.

In the second and fourth embodiments described above, when classification was repeatedly carried out, no consideration was given to information relating to how many times a document was selected, but when the constitution comprises a selection information appender, as in a sixth embodiment described below, selection information can be displayed together with cluster characteristics.

Since the information processing system comprising the document classification device according to the sixth embodiment of the present invention is the same as the first embodiment shown in Fig. 1, further explanation will be omitted.

5 Furthermore, since the hardware constitutions of the server 101 and the clients 102 are the same as the first embodiment shown in Figs. 2 and 3, in order to avoid repetition, their explanation will be omitted.

Next, the functional constitution of a document
10 classification device according to the sixth embodiment will be explained. Fig. 39 is a block diagram showing a functional constitution of the document classification device according to the sixth embodiment. In Fig. 39, like members to those in Fig. 35 of the fourth embodiment are represented by like
15 reference symbols, and explanation thereof is omitted.

In the block diagram of Fig. 39, the document classification device comprises an input section 3001, a language analyzer 3002, a vector creator 3003, a classifier 3004, a classification parameter specifier 3005, a classification
20 result memory 3006, a cluster characteristics display 3007, a cluster characteristics calculator 3008, a classification category memory 3009, a cluster selection specifier 3010, a classification category viewing operator 3011, a vector memory 3501, a document expression space corrector 3502, and a
25 selection information appender 3901.

When all or some documents belonging to a cluster portion of documents created by the classifier 3004 have been selected, the selection information appender 3901 appends selection information showing that the documents have been selected. Furthermore, the cluster characteristics display 3007 displays the cluster characteristics, and the selection information appended by the selection information appender 3901.

The selection information appender 3901 are controlled in accordance with commands from the CPU 201 and 301, and the like, in compliance with commands written in programs recorded in recording media such as a ROM 202 and 302, a RAM 203 and 303, or a disk device 306, and a hard disk 316.

Next, the detailed contents of the selection information appender 3901 will be explained. In a questionnaire, experience has taught that unique and highly opinionated answers are extremely important. This is because many answers could not have been anticipated by the person who planned the questionnaire.

Accordingly, in a case where documents belonging to a cluster selected by the operator are used in subsequent classifications, it is possible to improve the ability to identify documents used on multiple occasions, and also the ability to identify documents which have not been selected at all, by showing how many times the documents have been selected when the cluster characteristics display 3007 displays the

individual documents.

Fig. 40 is a diagram explaining a table 4000 provided in the classification result memory 3006 of the document classification device according to the sixth embodiment. In Fig. 40, table contents are listed for each document ID, and the table 4000 shows in which cycle each document was selected by the operator during classification. That is, when a document has been selected, selection information of "1" is entered, and when a document has not been selected, selection information of "0" is entered.

For example, when a document has been selected four times, the table 4000 shows that document ID "1" was selected by the operator in the first and second classifications, but was not selected in the third and fourth classifications. On the other hand, document ID "2" has not once been selected yet, indicating that it is an opinion unknown to the operator.

Based on such information, when the cluster characteristics display 3007 displays the documents to the operator, the display may for example be altered in accordance with the number of times the documents have been selected. For example, visual characteristics such as the color of the letters, the density of the background, and the color intensity may conceivably be altered.

Furthermore, the number of selections can be directly displayed by numerical symbols, graphs, or the like. In any

case, as long as it is possible to visually identify selected documents and unselected documents, the constitution is not limited to that described above.

Furthermore, the selection information may be viewed
5 using the classification category viewing operator 3011.

Next, the processing performed by the selection information appender 3901 will be explained. Fig. 41 is a flowchart showing a processing sequence of the selection information appender 3901 of the document classification device
10 according to the sixth embodiment. In the flowchart of Fig. 41, firstly, classification is carried out (Step S4101), and then, the first document is extracted (Step S4102).

It is determined whether the extracted document has been selected for classification in the Step S4101 (Step S4103).
15 Here, when the document has been selected (YES in the Step S4103), data "1" is stored as the selection information (Step S4104). On the other hand, when the document has not been selected (NO in the Step S4103), data "0" is stored as the selection information (Step S4105).

20 Next, it is determined whether or not the processing of the document has ended (Step S4106). Here, when all of the documents have not been processed (NO in the Step S4106), the next document is extracted (Step S4107), the processing shifts to the Step S4103, and the Steps S4103 to S4107 are repeated.

25 On the other hand, in the Step S4106, when all the

documents have been processed (YES in the Step S4106), the processing shifts to the Step S4101, and classification is performed again (Step S4101). In this way, the number of times that the processing between the Steps S4101 to S4107 is repeated
5 is equal to the number of classifications.

As explained above, according to the sixth embodiment, the selection information appender 3901 appends selected information, which is displayed by the cluster characteristics display 3007, and consequently, it is possible to improve the
10 ability to identify documents used on multiple occasions, and also the ability to identify documents which have not been selected at all.

The document classification method described in the second to fifth embodiments is realized by running a
15 predetermined program on a computer, such as a personal computer or a work station. The program is recorded on a computer-readable recording medium such as a hard disk, a floppy disk, a CD-ROM, an MO, or a DVD, and is executed by reading out the program from the recording medium using the computer.
20 Furthermore, the program can be distributed via the recording medium, or by using a network such as the Internet as a transmission medium.

Next, an information classification device according to the seventh to sixteenth embodiments will be explained. In the
25 present embodiment of the present invention, when one or more

collections of sentences written in a natural language is/are
to be classified, this will be termed a document. By way of
a more specific example, patent laid-open publications
classified by IPC classification, or newspaper articles
5 classified into specific fields such as politics, economics,
culture, science and technology, and the like, are documents.
When claims and specific sentences are extracted therefrom,
these are regarded either as sentences under the classification
of "claims", or, in the case of specific sentences which can
10 be classified according to intended usage, these are regarded
as documents. There follows a detailed description of the
seventh to sixteenth embodiments of the present invention based
on the drawings.

Fig. 42 is a block diagram showing a constitution of a
15 document classification device according to the seventh
embodiment of the present invention. As shown in Fig. 42, the
document classification device of the seventh embodiment
comprises a document input section (document input means) 5001
for inputting document data groups, a document divider
20 (document dividing means) 5002 for dividing document data into
one or multiple divided document data based on a predetermined
reference, a document-divided document map creator
(document-divided document map creation means) 5003 for
creating a map showing the correspondence between the document
25 data and the divided document data, a divided document

classifier (divided document classifying means) 5004 for
classifying the divided document data, that is, the divided
document, a divided document classification result creator
(divided document classification result creation means) 5005
5 for creating divided document classification result
information, a document classification result creator
(document classification result creation means) 5006 for
creating classification result information of the above
document data using the document-divided document map and the
10 divided document classification result information, etc.

The document divider 5002, the document-divided document
map creator 5003, the divided document classifier 5004, the
divided document classification result creator 5005, and the
document classification result creator 5006 have a shared or
15 independent memory for storing programs and a CPU, which
operates in compliance with the programs.

Next, the document classification device and the document
classification method of the seventh embodiment will be
explained in detail in accordance with Fig. 42 and the like.

20 Firstly, the document input section 5001 inputs a group of
documents. The document input section 5001 comprises a
keyboard, an OCR device, a detachable recording medium, or
network communications means, and the documents are input via
any one of these.

25 Then, document divider 5002 extracts the document data,

divides them based on a predetermined reference, and creates one or multiple divided document data from one document data. The document data is divided using a method specified by the user, such as using information relating to the structure of the documents, or information relating to the constituents of the documents. The method used will not be considered here.

Fig. 43 shows an example of creating multiple divided document data from document data using the document classification device and document classification method of the present invention. In this example, a document 1 comprises multiple news topics, and each one-minute topic forms one document unit. As shown in Fig. 43, the news topics are separated by two line-break codes. The document 1, comprising one document, is divided using this stipulation to create seven divided document data of divided documents 1-1 to 1-7, each comprising a separate topic. It is also possible to include the document 1 in its state prior to division in the data, but this is not done here.

When the document has been divided, the document-divided document map creator 5003 creates a map showing the document data prior to division in correspondence with the divided document data created from the document data. For example, the document-divided document map creator 5003 creates a map comprising identifiers uniquely representing individual document data, and identifiers uniquely representing

individual divided document data, or a map comprising
identifiers uniquely representing divided document data for
each document data. The method for arranging the document data
and divided document data in mutual correspondence will not be
5 considered here.

Fig. 44 shows an example of creating a document-divided
document map. In Fig. 44, the documents 1 to 3 represent
document data, and the divided documents 1 to 12 represent
divided document data. As shown in the diagram, identification
10 numbers (identifiers) for uniquely identifying the document
data and the divided document data are appended. Then, as shown
in the bottom left portion of Fig. 44, the identification
numbers of the document data and the identification numbers of
the divided document data are listed in mutual correspondence
15 in table format. When multiple divided document data can be
regarded as identical with regard to the reference used for the
document classification, identical identification numbers may
be appended thereto.

Thereafter, the divided document classifier 5004
20 classifies the divided documents. The divided documents can
be classified by, for example, language-analyzing the
individual divided documents, counting the incidence of words
contained therein, determining a characteristics vectors
quantitatively showing the characteristics of the documents
25 based on the result of the language analysis, and then using

a method such as square contingency, discriminatory analysis, or cluster analysis.

Next, the divided document classification result creator 5005 creates divided document classification result information based on the result of the divided document classification (see Fig. 45). Here, the divided document classification result information comprises, for example, (a) information relating to categories to which the divided data belong (e.g. information of the items "classification category" and "representative value and distance of categories to which the documents belong" in the table of "Results of classifying divided document data into three categories" shown in Fig. 45), (b) information relating to individually created categories (e.g. information of the items "representative value" and "number of data belonging to category (number of divided document)" in the table of "Information Relating to Classification Categories" shown in Fig. 45), (c) information between created categories (e.g. information in the table of "Distance between Classification Categories" in Table 4), (d) and such like. The user can also use the various information mentioned above as basic data for analyzing the classification result.

Fig. 45 shows an example of creating a classification result in a case where twelve divided document data are classified into three categories using their quantitative

characteristics vectors. The quantitative three-dimensional vectors of the divided document data (the number of components of the vector is the number of all the types of words originating in the classified document cluster, but here, the vectors are linearly converted to three-dimensional vectors in which several words have been deleted) can be classified into three categories by utilizing a cluster analysis method such as, for example, Ward's method.

That is, each of the divided document data belongs to one of the three categories shown in the diagram. The representative value of each category to which the divided document data belong is an average value of the characteristics vector of the divided document data which belong to the category (the center of the divided document data which belong to the category).

Furthermore, the distance (corresponding to the degree of similarity) to the representative value of the category to which the data belongs can be determined (for example, in the case of the divided document 3 in Fig. 45) using the value of divided document 3 in the divided document data characteristics vector item, and the value of the item of the representative value (center of the divided document category) of the category 2, which is the classification category for the divided document 3, in the following equation.

$$((3.00-2.66)^2 + (2.00-2.00)^2 + (4.00-3.66)^2)^{1/2} = 0.48$$

Hence, the smaller the distance to the representative value of the category to which the divided document belongs, the higher the degree of similarity with the average divided document belonging to that category.

5 In addition to the statistics shown in Fig. 45, various statistics can be created, such as dispersion within or between categories, the range of the degree of similarity in each category, etc.

Then, the document classification result creator 5006
10 uses the document-divided document map and the divided document classification result information to create classification result information of the document data, such as that shown in Fig. 46, for example. As shown in the example of Fig. 46, for each category, classification result information such as
15 divided document data belong to each category, the degree of similarity thereof (distance to the representative value of the category to which the data belongs), the pre-division document data to which the divided document data belongs (document to which data belongs), the area occupied by the document (the
20 share of the category occupied by the divided document data), the relative position of the divided document data in the document (order), and the degree of similarity ranking of the divided document data within the category to which it belongs, are created.

25 In the above example, document to which data belongs is

obtained from the document-divided document map, and other classification result information is obtained from the divided document classification result information. In addition to the information shown in Fig. 46, the document classification result creator 5006 can use various statistics, such as the dispersion of the data within categories, and the deviation value of the divided document data within the category to which it belongs, and the contents of the document data and the divided document data, and the like, as the classification result information.

Furthermore, in the example described above, all the results are expressed in table format as units of divided document data, but the classification categories and document data can also be expressed units. Furthermore, the classification result information need not only be expressed in text format, but can also be expression graphically, making it more comprehensible to the user.

Thus, according to the present invention, one document is divided, the divided document is classified, and the relationship between the document prior to division and the divided document is displayed to the user. Furthermore, the classification result of the divided document is displayed to the user. Therefore, when one document contains multiple topics and meanings, the document is not classified into categories limited to specific topics and meanings, or

classified into categories different from those desired by the user, making the classification categories more easily comprehensible to the user. Furthermore, since the position of the divided document in the document prior to division (the document to which the divided document belongs) is displayed, the user can efficiently read the part of the document cluster that he or she wants to read.

Fig. 47 is a block diagram showing a constitution of the document classification device according to an eighth embodiment of the present invention. As shown in Fig. 47, in addition to the constitution shown in the seventh embodiment of Fig. 42, the document classification device according to the eighth embodiment are added (a) a document saving section (document saving means) 5007 for saving document data, (b) a divided document saving section (divided document saving means) 5008 for saving divided document data, and (c) a document-divided document map saving section (document-divided document map saving means) 5009 for saving a document-divided document map created by the document-divided document map creator 5003. The saving sections for example comprise shared hard disks, semiconductor memories, or the like.

With the constitution described above, the document saving section 5007 of the present embodiment saves information accompanying the document, such as the contents of the document, the author of the document, the date of authorship, the date

of last correction, in an appropriate format. Furthermore,
when the document has a quantitative characteristics vector
comprising elements of the document, in addition to the document
contents, these are also saved in the document saving section
5 5007. When identifiers uniquely expressing the individual
document data are appended in the document input section 5001,
the document saving section 5007 also saves these identifiers
in an appropriate format.

Furthermore, the divided document saving section 5008 the
10 contents of the divided document data created by the document
divider 5002 in an appropriate format, and in addition, saves
quantitative characteristics vectors. When identifiers
uniquely expressing the individual document data are appended,
the divided document saving section 5008 also saves the
15 identifiers in an appropriate format.

Furthermore, the document-divided document map saving
section 5009 saves document-divided document maps created by
the document-divided document map creator 5003 in an
appropriate format.

20 According to the eighth embodiment, since document data,
divided document data, and document-divided document maps are
saved in this way, for a single document data it is possible
to efficiently determine classification results having
different parameters such as the number of classifications, the
25 classification method, and the settings used in the

classifications, without recreating the divided document data and the document-divided document map. Furthermore, by classifying the document data and saving the data needed to create the classification result, the user is free to take more
5 time over the classification, and to re-analyze previously classified documents within a given period of time.

Fig. 48 is a block diagram showing a constitution of the document classification device according to a ninth embodiment of the present invention. As shown in Fig. 48, in addition to
10 the constitution shown in the eighth embodiment of Fig. 47, the document classification device of the present embodiment further comprises a divided document classification result saving section (divided document classification result saving means) 5010 for saving the divided document classification
15 results created by the divided document classification result creator 5005. The divided document classification result saving section 5010 comprise, for example, a shared hard disk, a semiconductor memory, or the like.

Thus, according to the ninth embodiment, since document
20 data, divided document data, document-divided document maps, and divided document classification results are saved, in addition to the effects of the eighth embodiment, it is possible to express the classification result of a single classification in various formats, such as textual format, chart format and
25 graph format. Moreover, since the divided document

classification result information is saved, during
classifications and analysis of classification results, the
user is free to take more time over the operations, and can
re-analyze previously classified documents in a variety of
5 formats within any given period of time.

In the document classification device and document
classification method according to the tenth embodiment of the
present invention, as shown in Fig. 49, a document 1 comprises
document data prior to division, and is contained in multiple
10 divided document data created by the document divider 2. As
a consequence, in the present embodiment, the user is able to
obtain not only a detailed classification structure of document
data, but also a classification structure fusing a schematic
macro classification structure, obtained as a result of
15 classifying the document data itself prior to division.

In the document classification device and document
classification method according to the eleventh embodiment of
the present invention, the document divider 2 divides the
document data based on structural information relating to the
20 document data. Fig. 50 shows an example of the document
described by classification object document data or HTML-format.
Prior to division, structural information is extracted from
HTML-format document data such as that shown in Fig. 50, and
divided document data is created from document data by setting
25 appropriate division stipulation for the documents using that

structure.

That is, taking the tag "L1" in the document data by way of example, it is a stipulation for creating divided document data to "treat text having tag "L1" as one divided document data".

5 By applying this stipulation to the document data, the seven divided documents shown in Fig. 50 are created.

Even when the document does not have a specific structural format such as HTML, XML, SGML, as described above, a stipulation for division can be created from information relating to the size of the letters, the decoration of the letters, the color of the letters, the font, and the like, enabling the document to be divided. Furthermore, when the document data comprises an image, and is input by an OCR device or the like, a stipulation for division can be created using information relating to the original layout of the image, or the like, enabling a divided document to be created.

It is not necessary to use all the document data for the divided document data. For example, in the example shown in Fig. 50, the letter row "News Topic (98/09/25)" is not used in the divided document.

Thus, in the eleventh embodiment, structural information is extracted from the document data, and the structural information is used to set an appropriate stipulation for division prior to dividing the document. As a result, different topics are divided appropriately. Consequently, documents can

be classified in such a manner that the detailed classification structure of the document data is known.

In the twelfth embodiment, the document classification device and document classification method according to the seventh to tenth embodiments of the present invention, as shown in Fig. 51, further comprise (a) a document element analyzer (document element extraction means) 5011 for extracting elements such as words contained in the document data, and (b) an extractor of information accompanying elements (information accompanying elements extraction means) 5012 for extracting information accompanying the elements such as the part of speech accompanying the elements extracted by the document element analyzer 5011 (Fig. 51 shows an example in which the document element analyzer 5011 and the extractor of information accompanying elements 5012 are additionally provided to the ninth embodiment of Fig. 48). The document divider 5002 divides the document data using the elements extracted by the document element analyzer 5011, and the information accompanying the elements extracted by the extractor of information accompanying elements 5012.

As shown in Fig. 52, prior to division, the document element analyzer 5011, comprising language analysis processing means, extracts from the document data elements such as words, and the extractor of information accompanying elements 5012 extracts information accompanying the elements such as the

parts of speech, and an appropriate stipulation for division is set in accordance with the information. The document element analyzer 5011 and the extractor of information accompanying elements 5012 do not have to be newly provided, since similar means in the divided document classifier 5004 can be used instead.

In this embodiment, as for example shown in Fig. 52, the document data comprises a group of multiple news topics having no specific structural information. In this example, the topics are listed after letter rows comprising: Word "topic" + "number" + "return symbol". The above structure is identified from the extraction results of the document element analyzer 5011 and the extractor of information accompanying elements 5012, and after considering the ends of the sentences, the following division stipulation is created: "With the letter row "topic + number + return symbol" as the header, deem a letter row comprising the above letter row, and a letter row surrounded by a document return symbol, to be one divided document data".

More specifically, firstly, only the parts of speech and return symbols are extracted from the extracted words and information about parts of speech and the like. Then, letter rows "topic + number + return symbol" and document end symbols are detected, and their positions in the document are stored. Then, a division stipulation is applied to the document data, creating divided document data such as that shown in Fig. 52.

It is not necessary to use all the document data for the divided document data. For example, in the example shown in Fig. 52, the letter row "News Topic (98/09/25)" is not used in the divided document. Furthermore, in the above example, elements and information accompanying the elements is extracted from the document data in order to set a stipulation for division, but it is acceptable to extract only the elements, and to set a stipulation for division based only on the element information.

Thus, according to the twelfth embodiment, element information and the like is extracted from the document data, and the extracted element information and the like is used to set an appropriate stipulation for division. Consequently, as same as the eleventh embodiment, the document can be classified in such a manner that the detailed classification structure of the document data is known.

According to the thirteenth embodiment, in the document classification device and document classification method according to the seventh to the tenth embodiments, the document divider 5002 divides data in accordance with a specification range specified by the user. When the user specifies various divided document ranges for document data such as that shown in Fig. 53, the document divider 5002 divides the document in compliance with the specifications.

In the present embodiment, when classifying a document,

the document divider 5002 firstly displays on the screen left and right specification points, and a region specification object comprising region specification lines, as the initialized state in the upper part of the document. In this state, by using a pointing device such as a mouse to drag the left or right specification points and move it up and down, the user can select regions of the divided document.

When making a specification, the document divider 5002 shows that a region is being selected by changing the color of the specification pointer from dark to light, and changing the region specification line from a solid line to a broken line. To select a region, the user need only stop dragging the specification point at a position of his own choice.

Next, the user decides whether or not to make the region he or she has selected into a divided document. When he or she decides not to do so, this decision is shown clearly by the document divider 5002 casting a net over the selected region on the screen.

In this way, according to the present embodiment, since the user can select divided document data from document data as he or she wishes, he or she can learn the detailed classification structure of the document data. In addition, the user can classify documents as he or she wishes.

According to the fourteenth embodiment, in the document classification device and document classification method

according to the seventh to the tenth embodiments, document data is divided based on the number of letters, the number of sentences, or both the number of letters and the number of sentences. For example, the document data shown in Fig. 54 is divided into units of approximately two hundred letters.

Here, the units each comprise approximately two hundred letters, since there is no guarantee that a unit of exactly two hundred letters will end with a full stop. Therefore, the nearest full stop before or after the two hundredth letter is deemed to be the end of the divided document. In this way, the divided document of Fig. 54 is created. Similarly, documents can be divided into units comprising a predetermined number of sentences, and documents can be divided based on both the number of letters and the number of sentences.

Consequently, according to the fourteenth embodiment, since documents can be divided based on the number of letters, the number of sentences, or both the number of letters and the number of sentences, there is an increased capability to classify different documents having contents of different topics and the like. Therefore, as above, documents can be classified so that the detailed classification structure of the document data can be known.

According to the fifteenth embodiment, in the document classification device and document classification method according to the previous embodiments, the document

classification result creator 5006 specifies only information representing document data, and representative information accompanying the document data, as classification result information.

5 As shown for example in Fig. 55, the classification categories are displayed at the head, key words representing the categories are displayed next to the classification categories, and, for example, the document data name (document name) of the document data contained in the divided document data belonging to the categories is displayed below the category name, as information representing the document data. Furthermore, document icons are displayed on the left of the document data names. When these document icons are specified, the contents of the document data are displayed.

10 Furthermore, document data names of divided document data having a high degree of similarity to the category representative value are arranged at the head (left side) of the list of document data names. Furthermore, when multiple divided document data created from the same document data belong to the same classification category, only a document data name corresponding to the divided document data having the highest degree of similarity is displayed. The key words are words which appear frequently.

15 Thus, according to the fifteenth embodiment, since only information representing document data, and representative

information accompanying the document data, are displayed as the classification result information, the user can easily comprehend the overall classification structure of the document data in detail.

5 According to the sixteenth embodiment of the present invention, in addition to specifying the document classification result as in the fifteenth embodiment, information representing divided document data and information accompanying the divided document data are also displayed.

10 As shown for example in Fig. 56, the classification categories are displayed at the head, key words representing the categories are displayed next to the classification categories, and, for example, the document data name (document name) of the document data contained in the divided document data belonging to the categories is displayed below the category name, as information representing the document data.

15 Furthermore, document icons are displayed on the left of the document data names. When the document icons are specified, the contents of the document data are displayed. Moreover, 20 divided document icons are displayed on the right of the document data names. The position of divided document data in the document data, and the number of divided documents in the document data, are displayed in the divided document icons. The divided document data in the document data can be displayed by 25 specifying a divided document icon.

Furthermore, document data names of divided document data having a high degree of similarity to the category representative value are arranged at the head of the list of document data names. Furthermore, when multiple divided
5 document data created from the same document data belong to the same classification category, only a document data name corresponding to the divided document data having the highest degree of similarity is displayed.

Thus, according to the sixteenth embodiment, since only
10 information representing document data, representative information accompanying the document data, and information representing divided document data, representative information accompanying the divided document data, are displayed as the classification result information, the user
15 can easily comprehend the overall classification structure of the document data in detail, and can easily comprehend which document data has been classified in which category, and the like.

The document classification device and document
20 classification method of the present invention have been explained above, and programs for executing the document classification method can be recorded on a detachable and computer-readable recording medium, and the document classification according to the present invention can be
25 carried out by the recording medium within the above-mentioned

data processing device.

As described above, according to one aspect of this invention, the document processor of the present invention comprises a document memory for storing input document data; a selection unit for selecting all or part of document data stored in the documents memory; a characteristics extraction unit for extracting data relating to characteristics of letter rows from all or part of the document data selected by the selection unit; a work processing unit for work-processing all or part of the document data based on the data relating to characteristics of letter rows extracted by the characteristics extraction unit; and an output unit for outputting all or part of the document data work-processed by the work processing unit. Consequently, when analyzing documents according to their meanings, rather than merely outputting the result of the analysis, the entire information analysis operation can be supported.

Further, the output unit comprises an item value set unit for setting a plurality of item values based on the contents of all or part of the document data work-processed by the work-processing unit; and a totalization unit for totalizing all or part of the document data for each item value set by the item value set unit. Furthermore, the output unit outputs all or part of the document data in the format of a table having an item value as at least one axis. Consequently, the result

of the work-processing can easily be expressed in a cross table,
and the contents of the information can easily be grasped.
Therefore, when analyzing documents according to their meanings,
rather than merely outputting the result of the analysis, the
5 entire information analysis operation can be supported.

Further, the output unit outputs all or part of the
document data work-processed by the work processing unit
together with all or part of the document data in its state prior
to work-processing by the work processing unit. Consequently,
10 data to be work-processed and other data can be displayed
simultaneously and identified, whereby the range of the
work-processing to be carried out can be accurately and easily
determined. Therefore, when analyzing documents according to
their meanings, rather than merely outputting the result of the
15 analysis, the entire information analysis operation can be
supported.

Further, the document memory also stores all or part of
the document data work-processed by the work processing unit.
Consequently, since other data can be handled simultaneously,
20 when thereafter analyzing documents according to their meanings,
rather than merely outputting the result of the analysis, the
entire information analysis operation can be supported.

Further, the selection unit further selects all or part
of the document data output by the output unit. Consequently,
25 since all or part of the document data output by the output unit

can be selected for analysis, a wide variety of information can be analyzed with high precision. Therefore, when analyzing documents according to their meanings, rather than merely outputting the result of the analysis, the entire information analysis operation can be supported.

Further, the document memory further stores data relating to contents of the work processing. Consequently, not only can loss of data relating to the contents of work-processing can be prevented and the data managed easily, but also the relationship between settings used in the work-processing and the processed result can be determined. Therefore, when analyzing documents according to their meanings, rather than merely outputting the result of the analysis, the entire information analysis operation can be supported.

According to the another aspect of this invention, the document classification device according to the present invention comprises an input unit for inputting document data; a language analyzer unit for analyzing document data input by the input unit and obtaining language analysis information; a vector creation unit for document characteristic vectors for the document data based on the language analysis information obtained by the language analyzer unit; a classification unit for classifying documents based on the degree of similarity between document characteristic vectors created by the vector creation unit, and creating clusters of documents; a cluster

characteristics calculation unit for calculating cluster characteristics, which are characteristics of clusters of documents created by the classification unit; and a classification category memory for storing cluster characteristics, calculated by the cluster characteristics calculation unit, as constituent elements of classification categories. Consequently, it is possible to obtain clusters, and to structure and categorize the clusters based on their contents using their degree of similarity to the cluster center, and the like. Therefore, it is possible to gradually determine what kind of contents are contained in a given document cluster.

According to the another aspect of this invention, the document classification device comprises an input unit for inputting document data; a language analyzer unit for analyzing document data input by the input unit and obtaining language analysis information; a vector creation unit for creating document characteristic vectors for the document data based on the language analysis information obtained by the language analyzer unit; a classification unit for classifying documents based on the degree of similarity between document characteristic vectors created by the vector creation unit, and creating clusters of documents; a cluster characteristics calculation unit for calculating cluster characteristics, which are characteristics of clusters of documents created by the classification unit; a display unit for displaying the

cluster characteristics calculated by the cluster characteristics calculation unit; a cluster selection specification unit for selecting predetermined clusters from cluster of documents created by the classification unit; and
5 a classification category memory for storing cluster characteristics, calculated by the cluster characteristics calculation unit, as constituent elements of classification categories. Consequently, only selected clusters are used, making it possible to structure and categorize to clusters in
10 a manner closer to that desired by the operator. Therefore, it is possible to gradually determine what kind of contents are contained in a given document cluster.

Further, the document classification device of the present invention described above further comprises a document
15 characteristic vector memory for storing document characteristic vectors created by vector creation unit; and a vector correction unit for correcting document characteristic vectors stored in the document characteristic vector memory, so that document characteristic vectors of documents belonging
20 to clusters selected by the cluster selection unit are deleted. Furthermore, the classification unit classifies documents based on the document characteristic vectors corrected by the vector correction unit. Consequently, the effects of clusters which are already known can be eliminated, and new clusters can
25 be created. Therefore, it is possible to gradually determine

what kind of contents are contained in a given document cluster.

Further, the document classification device of the present invention described above further comprises a document characteristic vector memory for storing document characteristic vectors created by vector creation unit; and a document expression space correction unit for correcting document expression space when determining the degree of similarity between document characteristic vectors stored in the document characteristic vectors memory, based on a characteristics amount calculated from clusters selected by the cluster selection unit. Furthermore, the classification unit classifies documents based on the degree of similarity between document characteristic vectors created by the vector creation unit, using the document expression space corrected by the document expression space correction unit. Consequently, cluster characteristics selected by the operator in the previous classification can be eliminated from the next classification, enabling new clusters to be created. Therefore, it is possible to gradually determine what kind of contents are contained in a given document cluster.

Further, the document classification device of the present invention described above further comprises a document characteristic vector memory for storing document characteristic vectors created by vector creation unit; and a document expression space correction unit for correcting

document expression space when determining the degree of similarity between document characteristic vectors stored in the document characteristic vectors memory, based on a characteristics amount calculated from clusters selected by the cluster selection unit. Furthermore, the classification unit classifies documents based on the degree of similarity between document characteristic vectors created by the vector creation unit, using the document expression space corrected by the document expression space correction unit. Consequently, influences of the known cluster can be eliminated and cluster characteristics selected by the operator in the previous classification can be eliminated from the next classification, enabling new clusters to be created. Therefore, it is possible to gradually determine what kind of contents are contained in a given document cluster.

Further, the document classification device of the present invention described in above further comprises a selection information appending unit for appending selection information showing the fact of selection when all or part of the documents belonging to a cluster of documents created by the classification unit have been selected. Furthermore, the display unit displays the cluster characteristics, and also displays the selection information appended by the selection information appending unit. Consequently, it is possible to improve the ability to identify documents used on multiple

occasions, and the ability to identify documents which have not been selected at all. Therefore, it is possible to gradually determine what kind of contents are contained in a given document cluster.

5 Further, the classification category memory stores cluster characteristics and/or information created by an operator, in addition to all or part of the documents belonging to a cluster of documents selected by the selection specification unit, as constituent elements of classification
10 categories. Consequently, the contents of clusters can be easily recognized, and in addition, the operator can easily create his own classification categories, thereby improving the usefulness of the classification categories. Therefore, it is possible to gradually determine what kind of contents are
15 contained in a given document cluster.

According to still another aspect of this invention, the document classification device for classifying document clusters in accordance with contents thereof of the present invention comprises a document input unit for inputting
20 document data groups; a document dividing unit for dividing document data into one or multiple divided document data based on a predetermined reference; a document-divided document map creation unit for creating a map showing the correspondence between the document data and the divided document data; a
25 divided document classification unit for classifying the

having different parameters such as the number of classifications, the classification method, and the settings used in the classifications, without recreating the divided document data and the document-divided document map.

5 Furthermore, by classifying the document data and saving the data needed to create the classification result, the user is free to take more time over the classification, and to re-analyze previously classified documents within a given period of time.

10 Further, the document classification device of the present invention described above further comprises a divided document classification result save unit for saving divided document classification result information created by the divided document classification result creation unit.

15 Consequently, in addition to the effects achieved by the specific arrangement of the present invention described above, after one classification has been carried out, the result of that classification can be expressed in a variety of formats such as text, charts, graphs, and the like. Furthermore, by
20 saving the divided document classification result information, the user is free to take more time over classifications and analysis of classification results, and to re-analyze previously classified documents in a variety of formats within a given period of time.

25 Further, the multiple divided document data created by

the document dividing unit contains the document data in its state prior to being divided. Consequently, in addition to a classification structure of detailed document data, obtained by classifying the divided document data, the user is able to obtain a classification structure fusing a schematic macro classification as a result classifying the document data itself prior to division.

Further, the document dividing unit divides document data based on information relating to the structure of the document data. Consequently, division and the like of different topics can be carried out, whereby documents can be classified in such a manner that the detailed classification structures of their document data can be known.

Further, the document classification device further comprises a document element extraction unit for extracting elements in the document data; an element-accompanying information extraction unit for extracting element-accompanying information accompanying the elements extracted by the document element extraction unit. Furthermore, the document dividing unit divides the document data using elements extracted by the document element extraction unit, or the elements and element-accompanying information extracted by the element-accompanying information extraction unit. Consequently, documents can be classified so that the detailed classification structure of the document data can be known.

Further, the document dividing unit divides document data in compliance with a specified specification range. Consequently, documents can be classified in accordance with the wishes of the user, and so that the detailed classification structure of the document data can be known.

Further, the document dividing unit divides document data based on the number of letters, the number of sentences, or both the number of letters and the number of sentences. Consequently, there is an increased capability to classify different documents having contents of different topics and the like. Therefore, as above, documents can be classified so that the detailed classification structure of the document data can be known.

Further, the document classification result creation unit extracts and presents information showing document data, and representative information accompanying the document data, as classification result information. Consequently, the user is able to determine a detailed schematic structure or overall structure of the document data.

Further, the document classification result creation unit extracts and presents information showing divided document data, and representative information accompanying the divided document data, as classification result information. Consequently, the user is able to determine a detailed schematic structure or overall structure of the document data. In

addition, the user can easily determine which divided document has been classified in a given category.

According to still another aspect of this invention, the document processing method of the present invention outputs multiple input document data in order to display or print the document data in a predetermined format, and comprises the steps of storing input document data; selecting all or part of the document data stored in the storing step; extracting data relating to characteristics of letter rows from all or part of the document data selected by the selection step; work-
10 processing all or part of the document data based on the data relating to characteristics of letter rows extracted in the characteristics extraction step; and outputting all or part of the document data work-processed in the work processing step.
15 Consequently, when analyzing documents according to their meanings, rather than merely outputting the result of the analysis, the entire information analysis operation can be supported.

Further, the step of outputting comprises the steps of setting a plurality of item values based on the contents of all or part of the document data work-processed in the work-
20 processing step; and totalizing all or part of the document data for each item value set in the item value set step; and outputs all or part of the document data in the format of a table having
25 an item value as at least one axis. Consequently, the result

of the work-processing can easily be expressed in a cross table,
and the contents of the information can easily be grasped.
Therefore, when analyzing documents according to their meanings,
rather than merely outputting the result of the analysis, the
5 entire information analysis operation can be supported.

Further, the step of outputting further comprises
outputting all or part of the document data work-processed in
the work processing step together with all or part of the
document data in its state prior to work-processing in the work
10 processing step. Consequently, data to be work-processed and
other data can be displayed simultaneously and identified,
whereby the range of the work-processing to be carried out can
be accurately and easily determined. Therefore, when
analyzing documents according to their meanings, rather than
15 merely outputting the result of the analysis, the entire
information analysis operation can be supported.

Further, the step of storing further comprises storing
all or part of the document data work-processed in the work
processing step. Consequently, since other data can be handled
20 simultaneously, when thereafter analyzing documents according
to their meanings, rather than merely outputting the result of
the analysis, the entire information analysis operation can be
supported.

Further, the step of selecting further comprises
25 selecting all or part of the document data output in the output

step. Consequently, since all or part of the document data output in the output step can be selected for analysis, a wide variety of information can be analyzed with high precision. Therefore, when analyzing documents according to their meanings, rather than merely outputting the result of the analysis, the entire information analysis operation can be supported.

Further, the step of storing a document further comprises storing data relating to contents of the work processing. Consequently, not only can loss of data relating to the contents of work-processing can be prevented and the data managed easily, but also the relationship between settings used in the work-processing and the processed result can be determined. Therefore, when analyzing documents according to their meanings, rather than merely outputting the result of the analysis, the entire information analysis operation can be supported.

According to still another aspect of this invention, the document classification method of the present invention comprises the steps of inputting document data; language-analyzing document data input in the step of inputting and obtaining language analysis information; creating document characteristic vectors for the document data based on the language analysis information obtained in the step of language-analyzing; classifying documents based on the degree of similarity between document characteristic vectors created in the step of creating vectors, and creating clusters of

documents; calculating cluster characteristics, being characteristics of clusters of documents created in the step of classifying; and storing cluster characteristics, calculated in the step of calculating cluster characteristics, as constituent elements of classification categories. Consequently, it is possible to obtain clusters, and to structure and categorize the clusters based on their contents using their degree of similarity to the cluster center, and the like. Therefore, it is possible to gradually determine what kind of contents are contained in a given document cluster.

According to still another aspect of this invention, the document classification method of the present invention comprises the steps of inputting document data; language-analyzing document data input in the step of inputting and obtaining language analysis information; creating document characteristic vectors for the document data based on the language analysis information obtained in the step of language-analyzing; classifying documents based on the degree of similarity between document characteristic vectors created in the step of creating vectors, and creating clusters of documents; calculating cluster characteristics, which are characteristics of clusters of documents created in the step of classifying; displaying the cluster characteristics calculated in the step of calculating cluster characteristics; selecting predetermined clusters from cluster of documents

created in the step of classifying; and storing cluster characteristics, calculated in the step of calculating cluster characteristics, as constituent elements of classification categories. Consequently, only selected clusters are used, making it possible to structure and categorize to clusters in a manner closer to that desired by the operator. Therefore, it is possible to gradually determine what kind of contents are contained in a given document cluster.

Further, the document classification method of the present invention described above further comprises a step of correcting document characteristic vectors stored in the step of storing document characteristic vectors, so that document characteristic vectors of documents belonging to clusters selected by the step of selecting clusters are deleted. Furthermore, the step of classifying comprises classifying documents based on the document characteristic vectors corrected by the step of correcting vectors. Consequently, the effects of clusters which are already known can be eliminated, and new clusters can be created. Therefore, it is possible to gradually determine what kind of contents are contained in a given document cluster.

Further, the document classification method of the present invention described above further comprises a step of correcting document expression space when determining the degree of similarity between document characteristic vectors

stored in the step of storing document characteristic vectors,
based on a characteristics amount calculated from clusters
selected in the step of selecting clusters, and the step of
classifying comprises classifying documents based on the degree
5 of similarity between document characteristic vectors created
in the step of creating vectors, using the document expression
space corrected in the step of correcting the document
expression space. Consequently, cluster characteristics
selected by the operator in the previous classification can be
10 eliminated from the next classification, enabling new clusters
to be created. Therefore, it is possible to gradually determine
what kind of contents are contained in a given document cluster.

Further, the document classification method of the
present invention described above further comprises the steps
15 of correcting document expression space when determining the
degree of similarity between document characteristic vectors
stored in the step of storing document characteristic vectors,
based on a characteristics amount calculated from clusters
selected in the step of selecting clusters. Furthermore, the
20 step of classifying comprises classifying documents based on
the degree of similarity between document characteristic
vectors created in the step of creating vectors, using the
document expression space corrected in the step of correcting
the document expression space. Consequently, influences of
25 the known cluster can be eliminated and cluster characteristics

selected by the operator in the previous classification can be eliminated from the next classification, enabling new clusters to be created. Therefore, it is possible to gradually determine what kind of contents are contained in a given document cluster.

5 Further, the document classification method of the present invention described above further comprises the steps of appending selection information showing the fact of selection when all or part of the documents belonging to a cluster of documents created in the step of classifying have
10 been selected. Furthermore, the step of displaying comprises displaying the cluster characteristics, and displaying the selection information appended in the step of appending selection information. Consequently, it is possible to improve the ability to identify documents used on multiple
15 occasions, and the ability to identify documents which have not been selected at all. Therefore, it is possible to gradually determine what kind of contents are contained in a given document cluster.

Further, the step of creating classification categories
20 comprises creating cluster characteristics and/or information created by an operator, in addition to all or part of the documents belonging to a cluster of documents selected in the step of specifying selection, as constituent elements of classification categories. Consequently, the contents of
25 clusters can be easily recognized, and in addition, the operator

can easily create his own classification categories, thereby improving the usefulness of the classification categories. Therefore, it is possible to gradually determine what kind of contents are contained in a given document cluster.

5 According to still another aspect of this invention, the document classification method according to the present invention comprises the steps of inputting document data groups; dividing document data into one or multiple divided document data based on a predetermined reference; creating a
10 map showing the correspondence between the document data and the divided document data; classifying the divided document data; creating divided document classification result information based on the classification result of classifying the divided documents; and creating classification result
15 information of the document data using the document-divided document map and the divided document classification result information. Consequently, when one document contains multiple topics and meanings, these can be classified into categories according to specific topics and meanings, so that
20 the classifications do not differ from categories desired by a user, thereby enabling the user to easily comprehend the classification categories. Furthermore, since the positions of the divided documents in documents prior to division (documents belonging to the clusters) is displayed, the user
25 is able to efficiently read the parts of the document clusters

he or she wishes to read.

According to still another aspect of this invention, a computer-readable recording medium of the present invention stores programs for executing the above-described document
5 classification method on a computer, thereby making the program readable mechanically, and enabling the operation of the document classification method to be executed by a computer.

Although the invention has been described with respect to a specific embodiment for a complete and clear disclosure,
10 the appended claims are not to be thus limited but are to be construed as embodying all modifications and alternative constructions that may occur to one skilled in the art which fairly fall within the basic teaching herein set forth.

WHAT IS CLAIMED IS:

1. A document processor which displays and prints in a predetermined format a plurality of document data input thereto, comprising:

5 document memory which stores input document data;
selection unit which selects all or part of document data stored in said documents memory;

characteristics extraction unit which extracts data relating to characteristics of letter rows from all or part of
10 the document data selected by said selection unit;

work processing unit which work-processes all or part of the document data based on the data relating to characteristics of letter rows extracted by said characteristics extraction unit; and

15 output unit which outputs all or part of the document data work-processed by said work processing unit.

2. The document processor according to claim 1, wherein said output unit comprises item value set unit which sets a plurality
20 of item values based on the contents of all or part of the document data work-processed by said work-processing unit; and totalization unit which totalizes all or part of the document data for each item value set by said item value set unit;

said output unit outputs all or part of the document data
25 in the format of a table having an item value as at least one

axis.

3. The document processor according to claim 1, wherein said output unit outputs all or part of the document data work-processed by said work processing unit together with all or part of the document data in its state prior to work-processing by said work processing unit.

4. The document processor according to claim 1, wherein said document memory further stores all or part of the document data work-processed by said work processing unit.

5. The document processor according to claim 1, wherein said selection unit further selects all or part of the document data output by said output unit.

6. The document processor according to claim 1, wherein said document memory further stores data relating to contents of the work processing.

7. A document classification device which classifies documents based on contents thereof comprising:

input unit which inputs document data;

language analyzer unit which analyzes document data input

by said input unit and obtains language analysis information;

vector creation unit which obtains document characteristic vectors for the document data based on the language analysis information obtained by said language analyzer unit;

5 classification unit which classifies documents based on the degree of similarity between document characteristic vectors created by said vector creation unit, and creating clusters of documents;

10 cluster characteristics calculation unit which calculates cluster characteristics, which are characteristics of clusters of documents created by said classification unit; and

15 classification category memory which stores cluster characteristics, calculated by said cluster characteristics calculation unit, as constituent elements of classification categories.

8. A document classification device which classifies documents based on contents thereof comprising:

20 input unit which inputs a document data;

language analyzer unit which analyzes document data input by said input unit and obtains language analysis information;

25 vector creation unit which creates document characteristic vectors for the document data based on the language analysis information obtained by said language

analyzer unit;

classification unit which classifies documents based on the degree of similarity between document characteristic vectors created by said vector creation unit, and creates
5 clusters of documents;

cluster characteristics calculation unit which calculates cluster characteristics, which are characteristics of clusters of documents created by said classification unit;

display unit which displays the cluster characteristics
10 calculated by said cluster characteristics calculation unit;

cluster selection specification unit which selects predetermined clusters from cluster of documents created by said classification unit; and

classification category memory which stores cluster
15 characteristics, calculated by said cluster characteristics calculation unit, as constituent elements of classification categories.

9. The document classification device according to claim 8,
20 further comprising document characteristic vector memory which stores document characteristic vectors created by vector creation unit; and

vector correction unit which corrects document characteristic vectors stored in said document characteristic
25 vector memory, so that document characteristic vectors of

documents belonging to clusters selected by said cluster selection unit are deleted;

said classification unit which classifies documents based on the document characteristic vectors corrected by said
5 vector correction unit.

10. The document classification device according to claim 8,
further comprising document characteristic vector memory which
stores document characteristic vectors created by vector
10 creation unit; and

document expression space correction unit which corrects
document expression space when determining the degree of
similarity between document characteristic vectors stored in
said document characteristic vectors memory, based on a
15 characteristics amount calculated from clusters selected by
said cluster selection unit;

said classification unit classify the documents based on
the degree of similarity between document characteristic
vectors created by said vector creation unit, using the document
20 expression space corrected by said document expression space
correction unit.

11. The document classification device according to claim 9,
further comprising document characteristic vector memory which
25 stores document characteristic vectors created by vector

creation unit; and

document expression space correction unit which corrects the document expression space when determining the degree of similarity between document characteristic vectors stored in said document characteristic vectors memory, based on a characteristics amount calculated from clusters selected by said cluster selection unit;

said classification unit classify the documents based on the degree of similarity between document characteristic vectors created by said vector creation unit, using the document expression space corrected by said document expression space correction unit.

12. The document classification device according to claim 8, further comprising selection information appending unit which appends selection information showing the fact of selection when all or part of the documents belonging to a cluster of documents created by said classification unit have been selected;

said display unit displays the cluster characteristics, and also displays the selection information appended by said selection information appending unit.

13. The document classification device according to claim 8, wherein said classification category memory stores cluster

characteristics and/or information created by an operator, in addition to all or part of the documents belonging to a cluster of documents selected by said selection specification unit, as constituent elements of classification categories.

5

14. A document classification device which classifies document clusters in accordance with contents thereof comprising:

document input unit which inputs document data groups;

10

document dividing unit which divides document data into one or multiple divided document data based on a predetermined reference;

document-divided document map creation unit which creates a map showing the correspondence between the document data and the divided document data;

15

divided document classification unit which classifies the divided document data;

divided document classification result creation unit which creates divided document classification result information based on a classification result of said divided document classification unit; and

20

document classification result creation unit which creates classification result information of the above document data using the document-divided document map and the divided document classification result information.

25

15. The document classification device according to claim 14, further comprising document save unit which saves the document data;

5 divided document save unit which saves the divided document data; and

document-divided document map save unit which saves a document-divided document map created by said document-divided document map creation unit.

10

16. The document classification device according to claim 15, further comprising divided document classification result save unit which saves the divided document classification result information created by said divided document classification result creation unit.

15

17. The document classification device according to claim 14, wherein a plurality of divided document data created by said document dividing unit comprises the document data in its state prior to being divided.

20

18. The document classification device according to claim 14, wherein said document dividing unit divides document data based on information relating to the structure of the document data.

25

19. The document classification device according to claim 14,
further comprising document element extraction unit which
extracts elements in the document data;

element-accompanying information extraction unit which
5 extracts element-accompanying information accompanying the
elements extracted by said document element extraction unit;

said document dividing unit divides the document data
using elements extracted by said document element extraction
unit, or the elements and element-accompanying information
10 extracted by said element-accompanying information extraction
unit.

20. The document classification device according to claim 14,
wherein said document dividing unit divides the document data
15 in compliance with a specified specification range.

21. The document classification device according to claim 14,
wherein said document dividing unit divides the document data
based on the number of letters, the number of sentences, or both
20 the number of letters and the number of sentences.

22. The document classification device according to claim 14,
wherein said document classification result creation unit
extracts and presents information showing document data, and
25 representative information accompanying the document data, as

classification result information.

23. The document classification device according to claim 22,
wherein said document classification result creation unit
5 extracts and presents information showing divided document data,
and representative information accompanying the divided
document data, as classification result information.

24. A document processing method which outputs a plurality
10 of input document data in order to display or print the document
data in a predetermined format, comprising the steps of:

storing input document data;

selecting all or part of the document data stored in the
storing step;

15 extracting data relating to characteristics of letter
rows from all or part of the document data selected in the
selection step;

work-processing all or part of the document data based
on the data relating to characteristics of letter rows extracted
20 in the characteristics extraction step; and

outputting all or part of the document data work-
processed in the work-processing step.

25 25. The document processing method according to claim 24,
wherein the step of outputting comprises the steps of setting

a plurality of item values based on the contents of all or part of the document data work-processed in the work-processing step; and totalizing all or part of the document data for each item value set by in the item value setting step; and

5 outputs all or part of the document data in the format of a table having an item value as at least one axis.

26. The document processing method according to claim 24, wherein the step of outputting comprises outputting all or part
10 of the document data work-processed in the work-processing step together with all or part of the document data in its state prior to work-processing in the work-processing step.

27. The document processing method according to claim 24,
15 wherein the step of storing further comprises storing all or part of the document data work-processed in the work-processing step.

28. The document processing method according to claim 24,
20 wherein the step of selecting further comprises selecting all or part of the document data output in the output step.

29. The document processing method according to claim 24, wherein the step of storing a document further comprises storing
25 data relating to contents of the work processing.

30. A document classification method which classifies documents based on contents thereof comprising the steps of:

inputting a document data;

5 language-analyzing document data input in the step of inputting and obtaining language analysis information;

creating document characteristic vectors for the document data based on the language analysis information obtained in the step of language-analyzing;

10 classifying documents based on the degree of similarity between document characteristic vectors created in the step of creating vectors, and creating clusters of documents;

calculating cluster characteristics, being characteristics of clusters of documents created in the step
15 of classifying; and

storing cluster characteristics, calculated in the step of calculating cluster characteristics, as constituent elements of classification categories.

20 31. A document classification method of classifying documents based on contents thereof, comprising the steps of:

inputting a document data;

language-analyzing document data input in the step of inputting and obtaining language analysis information;

25 creating document characteristic vectors for the

document data based on the language analysis information
obtained in the step of language-analyzing;

classifying documents based on the degree of similarity
between document characteristic vectors created in the step of
5 creating vectors, and creating clusters of documents;

calculating cluster characteristics, which are
characteristics of clusters of documents created in the step
of classifying;

displaying the cluster characteristics calculated in the
10 step of calculating cluster characteristics;

selecting predetermined clusters from cluster of
documents created in the step of classifying; and

storing cluster characteristics, calculated in the step
of calculating cluster characteristics, as constituent
15 elements of classification categories.

32. The document classification method according to claim 31,
further comprising the step of correcting document
characteristic vectors stored in the step of storing document
20 characteristic vectors, so that document characteristic
vectors of documents belonging to clusters selected by the step
of selecting clusters are deleted;

the step of classifying comprising classifying documents
based on the document characteristic vectors corrected by the
25 step of correcting vectors.

33. The document classification method according to claim 31,
further comprising a step of correcting document expression
space when determining the degree of similarity between
document characteristic vectors stored in the step of storing
document characteristic vectors, based on a characteristics
amount calculated from clusters selected in the step of
selecting clusters;

the step of classifying comprising classifying documents
based on the degree of similarity between document
characteristic vectors created in the step of creating vectors,
using the document expression space corrected in the step of
correcting the document expression space.

34. The document classification method according to claim 32,
further comprising a step of correcting document expression
space when determining the degree of similarity between
document characteristic vectors stored in the step of storing
document characteristic vectors, based on a characteristics
amount calculated from clusters selected in the step of
selecting clusters;

the step of classifying comprising classifying documents
based on the degree of similarity between document
characteristic vectors created in the step of creating vectors,
using the document expression space corrected in the step of

correcting the document expression space.

35. The document classification method according to claim 31,
further comprising the steps of appending selection information
5 showing the fact of selection when all or part of the documents
belonging to a cluster of documents created in the step of
classifying have been selected;

the step of displaying comprising displaying the cluster
characteristics, and also displaying the selection information
10 appended in the step of appending selection information.

36. The document classification device according to claim 31,
wherein the step of creating classification categories
comprises creating cluster characteristics and/or information
15 created by an operator, in addition to all or part of the
documents belonging to a cluster of documents selected in the
step of specifying selection, as constituent elements of
classification categories.

20 37. A document classification method which classifies
document clusters in accordance with contents thereof
comprising the steps of:

inputting document data groups; dividing document data
into one or multiple divided document data based on a
25 predetermined reference; creating a map showing the

correspondence between the document data and the divided document data; classifying the divided document data; creating divided document classification result information based on the classification result of classifying the divided documents; and
5 creating classification result information of the document data using the document-divided document map and the divided document classification result information.

38. A computer-readable recording medium in which is stored
10 programs for executing a document classification method, which document classification method comprising the steps of:

storing input document data;

selecting all or part of the document data stored in the
storing step;

15 extracting data relating to characteristics of letter rows from all or part of the document data selected in the selection step;

work-processing all or part of the document data based on the data relating to characteristics of letter rows extracted
20 in the characteristics extraction step; and

outputting all or part of the document data work-processed in the work-processing step.

39. A computer-readable recording medium in which is stored
25 programs for executing a document classification method, which

document classification method comprising the steps of:

inputting a document data;

language-analyzing document data input in the step of
inputting and obtaining language analysis information;

5 creating document characteristic vectors for the
document data based on the language analysis information
obtained in the step of language-analyzing;

10 classifying documents based on the degree of similarity
between document characteristic vectors created in the step of
creating vectors, and creating clusters of documents;

calculating cluster characteristics, being
characteristics of clusters of documents created in the step
of classifying; and

15 storing cluster characteristics, calculated in the step
of calculating cluster characteristics, as constituent
elements of classification categories.

40. A computer-readable recording medium in which is stored
programs for executing a document classification method, which

20 document classification method comprising the steps of:

inputting a document data;

language-analyzing document data input in the step of
inputting and obtaining language analysis information;

25 creating document characteristic vectors for the
document data based on the language analysis information

obtained in the step of language-analyzing;

classifying documents based on the degree of similarity between document characteristic vectors created in the step of creating vectors, and creating clusters of documents;

5 calculating cluster characteristics, which are characteristics of clusters of documents created in the step of classifying;

displaying the cluster characteristics calculated in the step of calculating cluster characteristics;

10 selecting predetermined clusters from cluster of documents created in the step of classifying; and

storing cluster characteristics, calculated in the step of calculating cluster characteristics, as constituent elements of classification categories.

15

41. A computer-readable recording medium in which is stored programs for executing a document classification method, which document classification method comprising the steps of:

inputting document data groups; dividing document data
20 into one or multiple divided document data based on a predetermined reference; creating a map showing the correspondence between the document data and the divided document data; classifying the divided document data; creating divided document classification result information based on the
25 classification result of classifying the divided documents; and

creating classification result information of the document data
using the document-divided document map and the divided
document classification result information.

ABSTRACT OF THE DISCLOSURE

In the document processor, a document memory which stores input document data; a selector which selects all or part of document data stored in the document memory; a characteristics
5 extractor which extracts data relating to characteristics of letter rows from all or part of the document data selected by the selector; a work processor which work-processes all or part of the document data based on the data relating to characteristics of letter rows extracted by the characteristics
10 extractor; and an output section which outputs all or part of the document data work-processed by the work processor are provided.

1/56

FIG.1



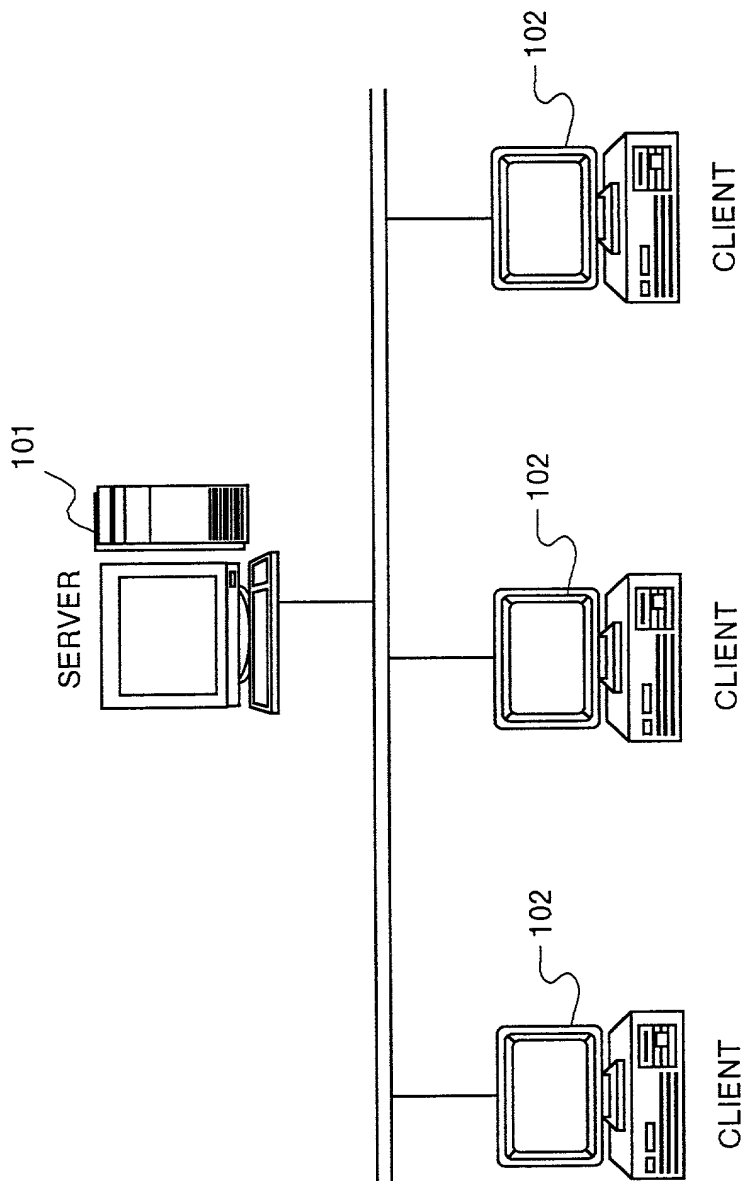


FIG. 2

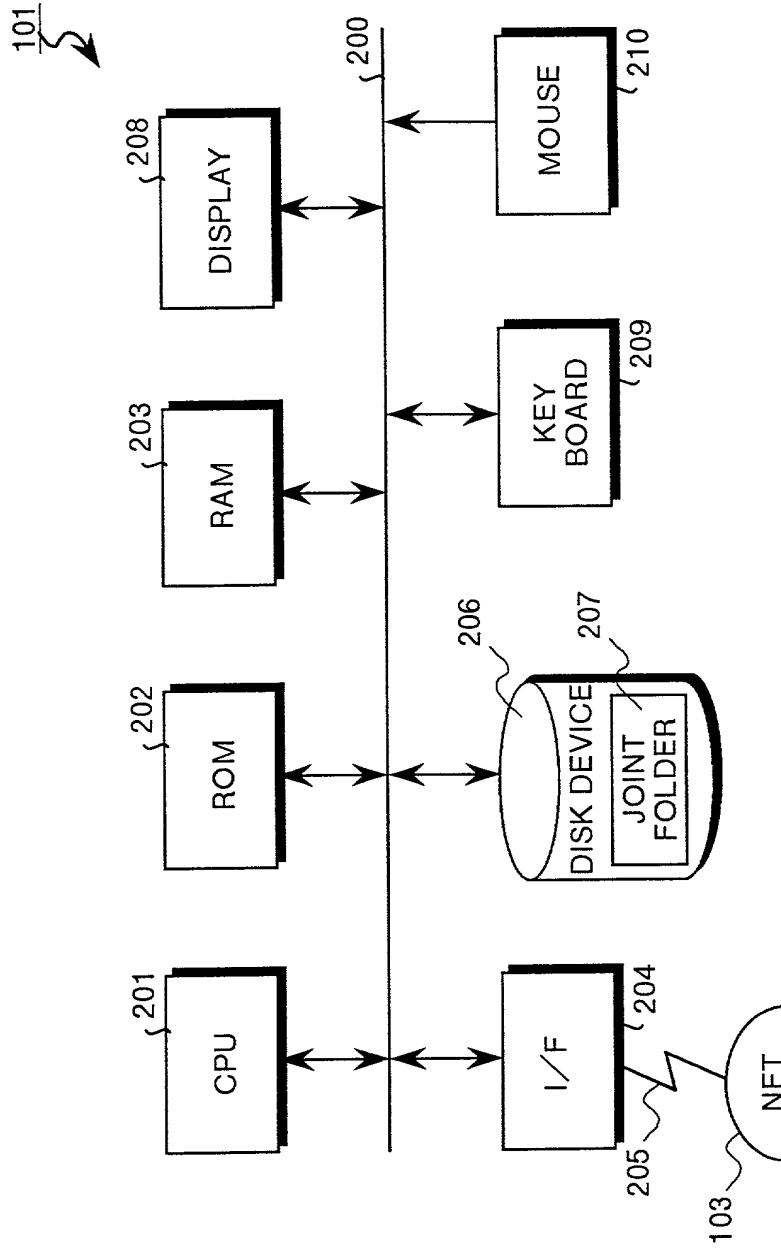


3/56

FIG. 3

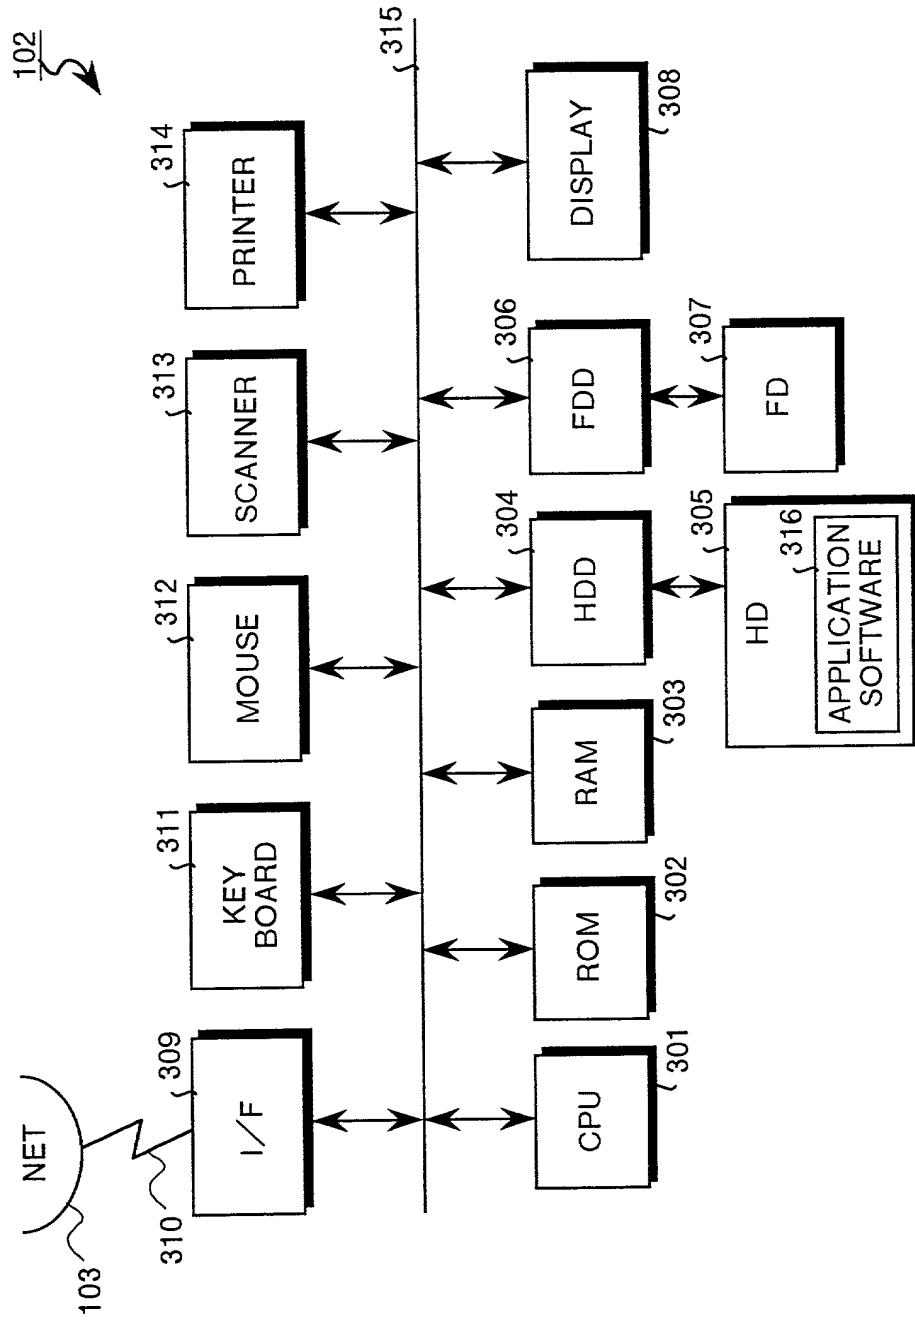

4/56

FIG.4

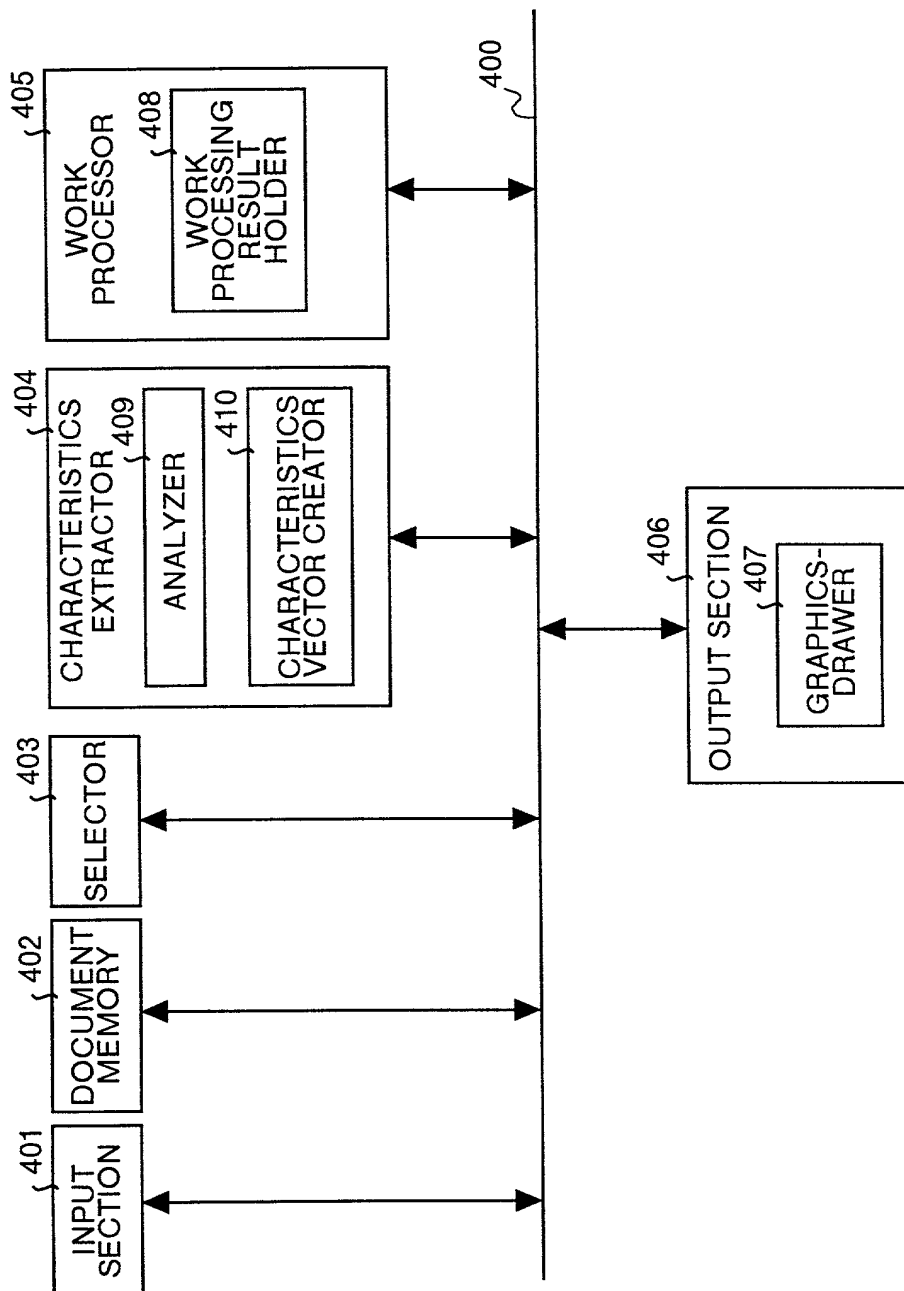


66/2327 6432460

5/56

FIG.5


ITEM NAME	ITEM VALUE
APPLICATION NO.	JAPANESE PATENT APPLICATION LAID-OPEN NO. 10-00000
DATE OF APPLICATION	JANUARY 1, 1998
NUMBER OF CLAIMS	3
NAME OF INVENTION	IMAGE CREATING DEVICE
ADVANTAGES	THE IMAGE CREATING DEVICE OF THE PRESENT INVENTION COMPRISES....

FIG.6

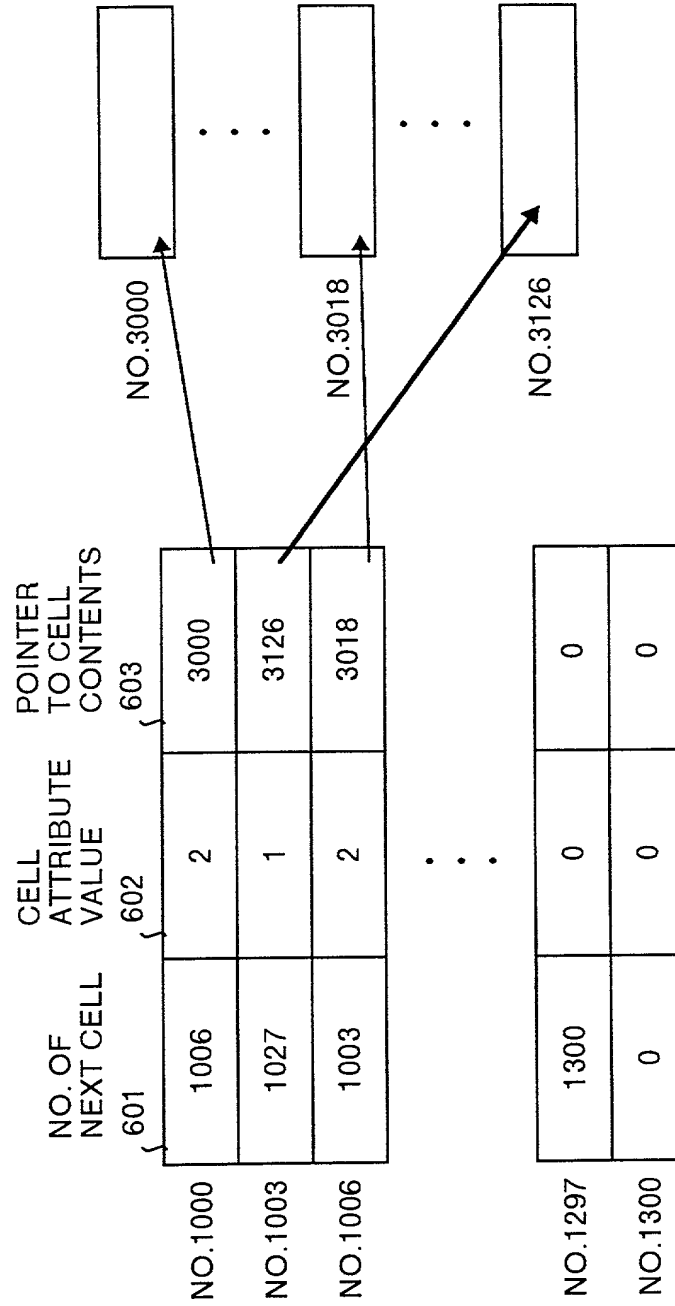

7/56

FIG.7

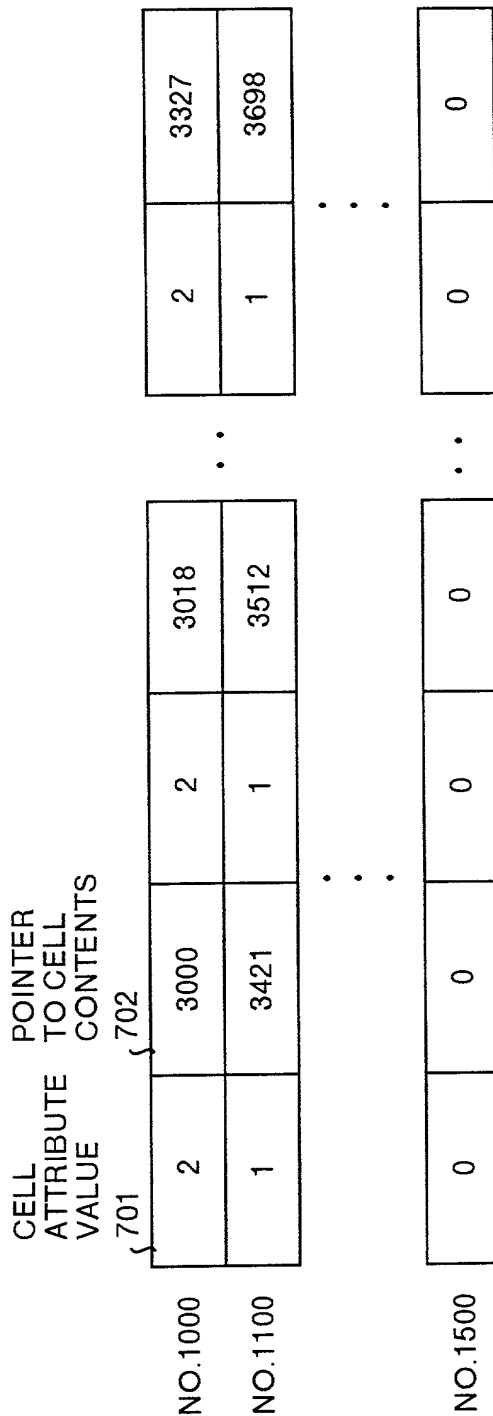

8/56

FIG.8

801	802	803	804	805	806
NO.	DATE RECEIVED	SALES OFFICE	TYPE OF VEHICLE	YEAR	CONTENTS
1	1997/3/5	AICHI	ABC1800	1993	LARGE NOISE POLLUTION
2	1997/3/5	TOYAMA	ABC2000	1995	EXHAUST IS BLACK
3	1997/3/5	TOKYO	ABC1800	1996	VEHICLE PAINT CHANGES COLOR
4	1997/3/5	SAPPORO	DEF1600	1995	OIL LEAKS
5	1997/3/5	FUKUOKA	KLM1200	1992	HEATER DOES NOT FUNCTION
6	1997/3/5	NOBORIBETSU	DEF1600	1994	LARGE NOISE POLLUTION
7	1997/3/5	NAGANO	DEF1600	1996	ENGINE WILL NOT START
8	1997/3/5	TOKYO	ABC1800	1997	OVERHEAT OCCURS
9	1997/3/6	TAKAMATSU	XYZ3000	1992	BATTERY IS DEAD
10	1997/3/6	NAGASAKI	KLM1200	1993	ENGINE WILL NOT START
11	1997/3/6	OSAKA	ABC1600	1994	EXHAUST IS BLACK
12	1997/3/6	NAGANO	DEF1600	1997	RADIO DOES NOT WORK
13	1997/3/6	MORIOKA	ABC1800	1996	PAINT IS PEELING
14	1997/3/6	SENDAI	XYZ3000	1995	HEATER DOES NOT FUNCTION

9/56

FIG.9

NO.	DATE RECEIVED	SALES OFFICE	TYPE OF VEHICLE	YEAR	CONTENTS
11	1997/3/6	OSAKA	ABC1600	1994	EXHAUST IS BLACK
53	1997/4/21	NAGANO	ABC1600	1993	OIL LEAKS
1	1997/3/5	AICHI	ABC1800	1993	LARGE NOISE POLLUTION
3	1997/3/5	TOKYO	ABC1800	1996	VEHICLE PAINT CHANGES COLOR
8	1997/3/5	TOKYO	ABC1800	1997	OVERHEAT OCCURS
13	1997/3/6	MORIOKA	ABC1800	1996	PAINT IS PEELING
18	1997/3/10	OSAKA	ABC1800	1994	BATTERY IS DEAD
28	1997/3/12	HIROSHIMA	ABC1800	1995	EXHAUST IS BLACK
35	1997/3/17	YOKOHAMA	ABC1800	1996	LARGE NOISE POLLUTION
39	1997/3/20	AICHI	ABC1800	1993	LARGE NOISE POLLUTION
42	1997/3/22	TOKYO	ABC1800	1996	VEHICLE PAINT CHANGES COLOR
46	1997/3/24	TOYAMA	ABC1800	1997	ENGINE WILL NOT START
47	1997/3/24	OSAKA	ABC1800	1994	BATTERY IS DEAD
4	1997/3/5	SAPPORO	DEF1600	1995	OIL LEAKS

10/56

FIG.10

NO.	DATE RECEIVED	SALES OFFICE	TYPE OF VEHICLE	YEAR	CONTENTS
11	1997/3/6	OSAKA	ABC1600	1994	EXHAUST IS BLACK
53	1997/4/21	NAGANO	ABC1600	1993	OIL LEAKS
1	1997/3/5	AICHI	ABC1800	1993	LARGE NOISE POLLUTION
3	1997/3/5	TOKYO	ABC1800	1996	VEHICLE PAINT CHANGES COLOR
8	1997/3/5	TOKYO	ABC1800	1997	OVERHEAT OCCURS
13	1997/3/6	MORIOKA	ABC1800	1996	PAINT IS PEELING
18	1997/3/10	OSAKA	ABC1800	1994	BATTERY IS DEAD
28	1997/3/12	HIROSHIMA	ABC1800	1995	EXHAUST IS BLACK
35	1997/3/17	YOKOHAMA	ABC1800	1996	LARGE NOISE POLLUTION
39	1997/3/20	AICHI	ABC1800	1993	LARGE NOISE POLLUTION
42	1997/3/22	TOKYO	ABC1800	1996	VEHICLE PAINT CHANGES COLOR
46	1997/3/24	TOYAMA	ABC1800	1997	ENGINE WILL NOT START
47	1997/3/24	OSAKA	ABC1800	1994	BATTERY IS DEAD
4	1997/3/5	SAPPORO	DEF1600	1995	OIL LEAKS

11/56

FIG.11

	CONTENTS OF EXTRACTION PROCESSING
1	WORDS IN LETTER ROW
2	NUMBER OF WORDS IN LETTER ROW
3	NUMBER OF LETTER OF WORDS IN LETTER ROW
4	NUMBER OF TIMES WORDS IN LETTER ROW APPEAR
5	PARTS OF SPEECH OF WORDS IN LETTER ROW
6	DATA REPRESENTING RELATIONSHIP BETWEEN WORDS IN LETTER ROW
7	NUMBER OF SENTENCES IN LETTER ROW
8	NUMBER OF LETTERS IN SENTENCES IN LETTER ROW
9	NUMBER OF CLAUSES OF SENTENCES IN LETTER ROW
10	RELATIONSHIP BETWEEN SENTENCES IN LETTER ROW
::	::

12/56

FIG.12

	CONTENTS OF WORK PROCESSING
1	CLASSIFICATION
2	RETRIEVAL
3	REARRANGEMENT
4	EXTRACT REPRESENTATIVE VALUE
5	EXTRACT MAXIMUM VALUE
6	EXTRACT MINIMUM VALUE
7	CALCULATION
:	:

05574885-2

FIG. 13

[illegible]

14/56

FIG.14

WORD	WORD ID
NOISE POLLUTION	1
IS	2
LARGE	3
PAINT	4
COLOR	5
CHANGE	6
OVERHEAT	7
OCCURS	8
PEELING	9
BATTERY	10
DEAD	11
EXHAUST	12
BLACK	13

15/56

FIG.15

1501

NO.	DATE RECEIVED	SALES OFFICE	TYPE OF VEHICLE	YEAR	CONTENTS	CLUSTER NUMBER
1	1997/3/5	AICHI	ABC1800	1993	LARGE NOISE POLLUTION	5
2	1997/3/5	TOYAMA	ABC2000	1995	EXHAUST IS BLACK	1
3	1997/3/5	TOKYO	ABC1800	1996	VEHICLE PAINT CHANGES COLOR	7
4	1997/3/5	SAPPORO	DEF1600	1995	OIL LEAKS	11
5	1997/3/5	FUKUOKA	KLM1200	1992	HEATER DOES NOT FUNCTION	2
6	1997/3/5	NOBORIBETSU	DEF1600	1994	LARGE NOISE POLLUTION	5
7	1997/3/5	NAGANO	DEF1600	1996	ENGINE WILL NOT START	8
8	1997/3/5	TOKYO	ABC1800	1997	OVERHEAT OCCURS	14
9	1997/3/6	TAKAMATSU	XYZ3000	1992	BATTERY IS DEAD	12
10	1997/3/6	NAGASAKI	KLM1200	1993	ENGINE WILL NOT START	8
11	1997/3/6	OSAKA	ABC1600	1994	EXHAUST IS BLACK	1
12	1997/3/6	NAGANO	DEF1600	1997	RADIO DOES NOT WORK	6
13	1997/3/6	MORIOKA	ABC1800	1996	PAINT IS PEELING	7
14	1997/3/6	SENDAI	XYZ3000	1995	HEATER DOES NOT FUNCTION	2

FIG.16

1600

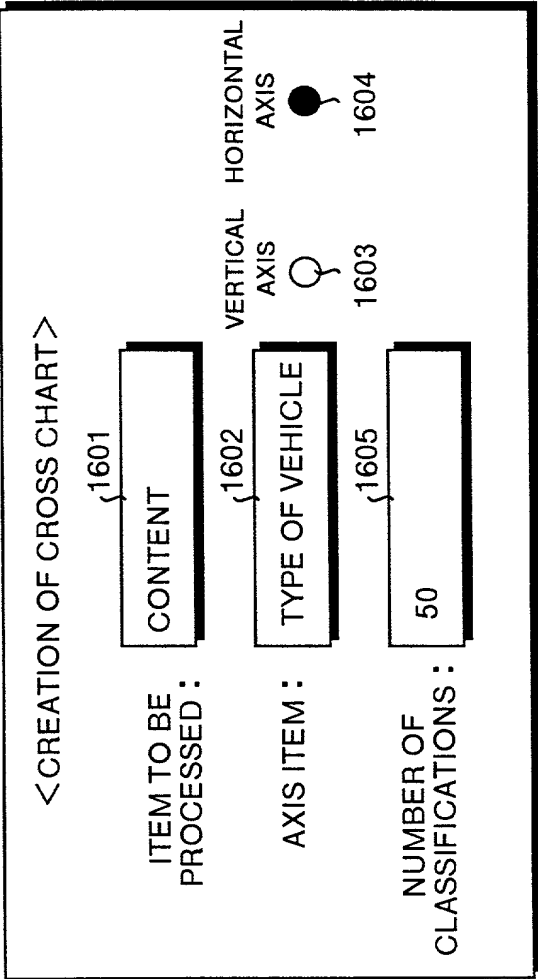


FIG.17

1700

TYPE OF VEHICLE						
	ABC1600	ABC1800	ABC2000	DEF1600	KLM1200	XYZ3000
CLUSTER 1	3	0	4	1	1	0
CLUSTER 2	0	0	2	0	0	23
CLUSTER 3	5	3	2	7	0	4
CLUSTER 4	7	6	7	0	0	1
.....
TOTAL	227	135	87	194	134	281
						1058

FIG.18

TYPE OF VEHICLE					1800				1700	
	ABC1600	ABC1800	ABC2000	DEF1600	KLM1200	XYZ3000	TOTAL			
CLUSTER 1	3	0	4	1	0	0	9			
				0	0	23	25			
				7	0	4	21			
				0	0	1	21			
				-----	-----	-----	-----			
				194	134	281	1058			


1801

NUMBER OF DATA : 4
DISPLAY ITEM : CONTENTS
CELL : ABC2000-CLUSTER 1

EXHAUST IS BLACK
EXHAUST IS BLACK
EXHAUST IS BLACK
EXHAUST IS BLACK


19/56

FIG.19

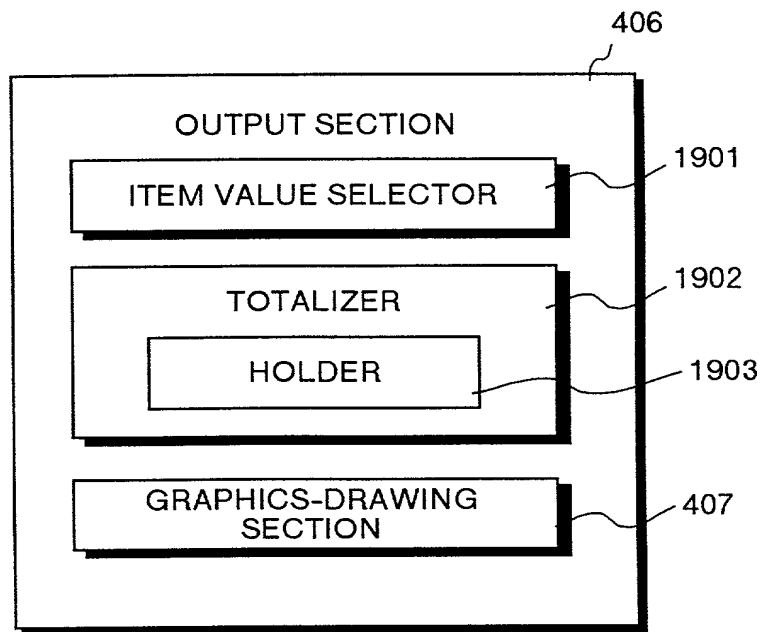

20/56

FIG.20

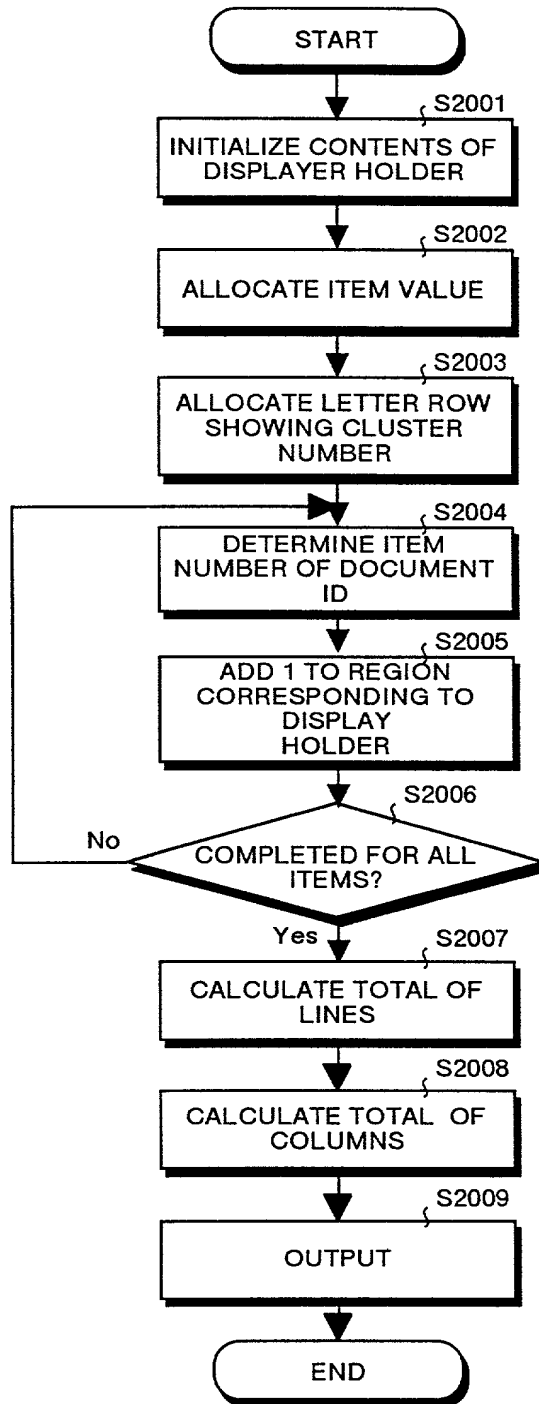

21/56

FIG.21

2101

NO.	DATE RECEIVED	SALES OFFICE	TYPE OF VEHICLE	YEAR	CONTENTS	CLUSTER NUMBER
1	1997/3/5	AICHI	ABC1800	1993	LARGE NOISE POLLUTION	5
2	1997/3/5	TOYAMA	ABC2000	1995	EXHAUST IS BLACK	1
3	1997/3/5	TOKYO	ABC1800	1996	VEHICLE PAINT CHANGES COLOR	7
4	1997/3/5	SAPPORO	DEF1600	1995	OIL LEAKS	11
5	1997/3/5	FUKUOKA	KLM1200	1992	HEATER DOES NOT FUNCTION	2
6	1997/3/5	NOBORIBETSU	DEF1600	1994	LARGE NOISE POLLUTION	6
7	1997/3/5	NAGANO	DEF1600	1996	ENGINE WILL NOT START	8
8	1997/3/5	TOKYO	ABC1800	1997	OVERHEAT OCCURS	14
9	1997/3/6	TAKAMATSU	XYZ3000	1992	BATTERY IS DEAD	12
10	1997/3/6	NAGASAKI	KLM1200	1993	ENGINE WILL NOT START	8
11	1997/3/6	OSAKA	ABC1600	1994	EXHAUST IS BLACK	1
12	1997/3/6	NAGANO	DEF1600	1997	RADIO DOES NOT WORK	6
13	1997/3/6	MORIOKA	ABC1800	1996	PAINT IS PEELING	7
14	1997/3/6	SENDAI	XYZ3000	1995	HEATER DOES NOT FUNCTION	2

22/56

FIG.22


NO.	DATE RECEIVED	SALES OFFICE	TYPE OF VEHICLE	YEAR	CONTENTS	CLUSTER NUMBER
2	1997/3/5	TOYAMA	ABC2000	1995	EXHAUST IS BLACK	1
11	1997/3/6	YOKYO	ABC1600	1994	EXHAUST IS BLACK	1
15	1997/3/7	SAPPORO	ABC2000	1996	EXHAUST IS BLACK	1
23	1997/3/7	FUKUOKA	ABC2000	1995	EXHAUST IS BLACK	1
35	1997/3/8	NAGANO	KLM1200	1992	EXHAUST STINKS	1
54	1997/3/10	TOKYO	ABC1600	1994	EXHAUST IS BLACK	1
63	1997/3/12	NAGANO	ABC2000	1996	EXHAUST IS BLACK	1
73	1997/3/14	TOKYO	DEF1600	1997	EXHAUST SMELLS	1
82	1997/3/14	FUKUOKA	ABC1600	1992	EXHAUST IS BLACK	1
14	1997/3/6	SENDAI	XYZ3000	1995	HEATER DOES NOT FUNCTION	1
18	1997/3/7	NAGANO	XYZ3000	1997	COLD DUE TO HEATER NOT WORKING	2
22	1997/3/7	NAGANO	XYZ3000	1997	HEATER DOES NOT FUNCTION	2
27	1997/3/8	SENDAI	XYZ3000	1995	HEATER DOES NOT WORK PROPERLY	2
37	1997/3/8	NAGANO	XYZ3000	1995	HEATER DOES NOT FUNCTION	2

23/56

FIG.23


2301		SALES OFFICE	TYPE OF VEHICLE	YEAR	CONTENTS	CLUSTER NUMBER
NO.	DATE RECEIVED					
2	1997/3/5	TOYAMA	ABC2000	1995	EXHAUST IS BLACK	1
11	1997/3/6	YOKYO	ABC1600	1994	EXHAUST IS BLACK	1
15	1997/3/7	SAPPORO	ABC2000	1996	EXHAUST IS BLACK	1
23	1997/3/7	FUKUOKA	ABC2000	1995	EXHAUST IS BLACK	1
35	1997/3/8	NAGANO	KLM1200	1992	EXHAUST STINKS	1
54	1997/3/10	TOKYO	ABC1600	1994	EXHAUST IS BLACK	1
63	1997/3/12	NAGANO	ABC2000	1996	EXHAUST IS BLACK	1
73	1997/3/14	TOKYO	DEF1600	1997	EXHAUST SMELLS	1
82	1997/3/14	FUKUOKA	ABC1600	1992	EXHAUST IS BLACK	1
14	1997/3/6	SENDAL	XYZ3000	1995	HEATER DOES NOT FUNCTION	1
18	1997/3/7	NAGANO	XYZ3000	1997	COLD DUE TO HEATER NOT WORKING	2
22	1997/3/7	NAGANO	XYZ3000	1997	HEATER DOES NOT FUNCTION	2
27	1997/3/8	SENDAL	XYZ3000	1995	HEATER DOES NOT WORK PROPERLY	2
37	1997/3/8	NAGANO	XYZ3000	1995	HEATER DOES NOT FUNCTION	2

FIG. 24

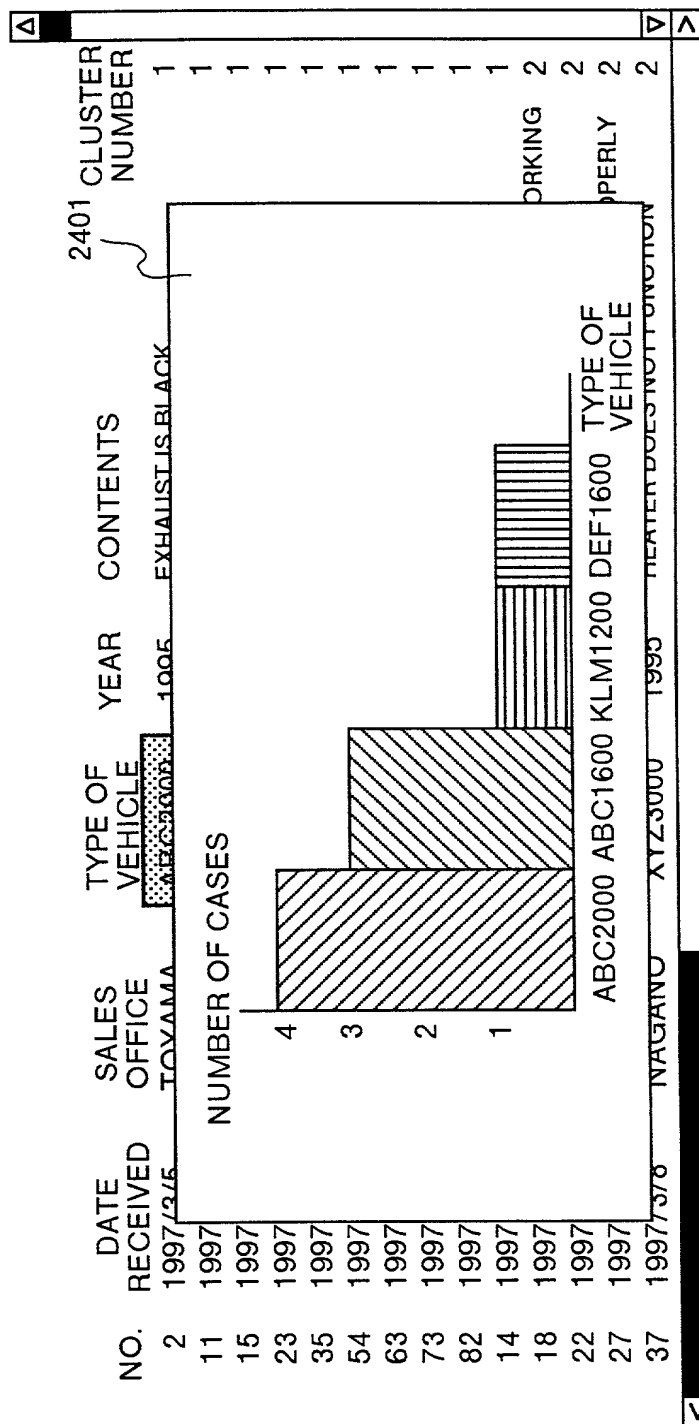

25/56

FIG.25

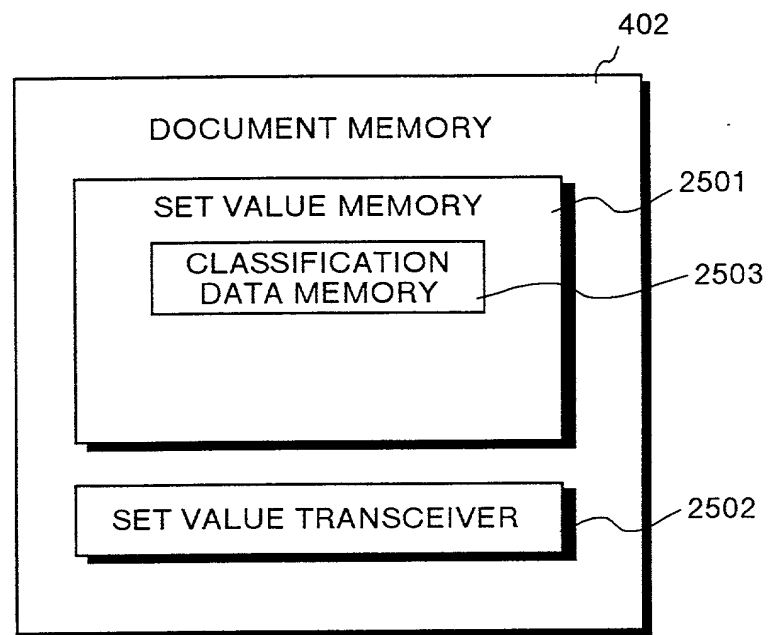

26/56

FIG.26

2605 2603 2602 2604 2601

FILE	EDIT	CLASSIFICATION	DATE RECEIVED	SALES	TYPE OF VEHICLE	YEAR	CONTENTS
11			1997/3		ABC1800	1994	EXHAUST IS BLACK
53			1997/4		ABC1800	1993	OIL LEAKS
1			1997/3		ABC1800	1993	LARGE NOISE POLLUTION
3			1997/3		ABC1800	1996	VEHICLE PAINT CHANGES COLOR
8			1997/3		ABC1800	1997	OVERHEAT OCCURS
13			1997/3/6	MORIOKA	ABC1800	1996	PAINT IS PEELING
18			1997/3/10	OSAKA	ABC1800	1994	BATTERY IS DEAD
28			1997/3/12	HIROSHIMA	ABC1800	1995	EXHAUST IS BLACK
35			1997/3/17	YOKOHAMA	ABC1800	1996	LARGE NOISE POLLUTION
39			1997/3/20	AICHI	ABC1800	1993	LARGE NOISE POLLUTION
42			1997/3/22	TOKYO	ABC1800	1996	VEHICLE PAINT CHANGES COLOR
46			1997/3/24	TOYAMA	ABC1800	1997	ENGINE WILL NOT START
47			1997/3/24	OSAKA	ABC1800	1994	BATTERY IS DEAD
4			1997/3/5	SAPPORO	DEF1600	1995	OIL LEAKS

PLEASE INPUT NUMBER OF CLASSIFICATIONS : 50

NUMBER OF CLASSIFICATIONS : 50

27/56

FIG.27

2701				2703		2702	
NO.	DATE RECEIVED	SALES OFFICE	TYPE OF VEHICLE	YEAR	CONTENTS	CLUSTER NUMBER	
1	1997/3/5	AICHI	AB		DATE OF MAY 12, 1997	5	
2	1997/3/5	TOYAMA	AB		CLASSIFICATION : 16:32	1	
3	1997/3/5	TOKYO	AB		NUMBER OF	7	
4	1997/3/5	SAPPORO	DE		DOCUMENTS : 823	11	
5	1997/3/5	FUKUOKA	KL		<CLASSIFICATION SET VALUE>	2	
6	1997/3/5	NOBORIBETU	DE		CLASSIFICATION	5	
7	1997/3/5	NAGANO	DE		NUMBER : 30	8	
8	1997/3/5	TOKYO	AB		CLASSIFICATION	14	
9	1997/3/6	TAKAMATSU	XY		SPEECH PART : NOUN	12	
10	1997/3/6	NAGASAKI	KL			8	
11	1997/3/6	OSAKA	ABCT600	1994	EXTRUST IS BLACK	1	
12	1997/3/6	NAGANO	DEF1600	1997	RADIO DOES NOT WORK	6	
13	1997/3/6	MORIOKA	ABC1800	1996	PAINT IS PEELING	7	
14	1997/3/6	SENDAI	XYZ3000	1995	HEATER DOES NOT FUNCTION	2	


28/56

FIG.28

NO.	DATE RECEIVED	SALES OFFICE	TYPE OF VEHICLE	YEAR	CONTENTS	CLUSTER NUMBER
1	1997/3/5	AICHI	ABC1800	1993	LARGE NOISE POLLUTION	5
2	1997/3/5	TOYAMA	ABC2000	1995	EXHAUST IS BLACK	1
3	1997/3/5	TOKYO	ABC1800	1996	VEHICLE PAINT CHANGES COLOR	7
4	1997/3/5	SAPPORO	DEF1600	1995	OIL LEAKS	11
5	1997/3/5	FUKUOKA	KLM1200	1992	HEATER DOES NOT FUNCTION	2
6	1997/3/5	NOBORIBETSU	DEF1600	1994	LARGE NOISE POLLUTION	5
7	1997/3/5	NAGANO	DEF1600	1996	ENGINE WILL NOT START	8
8	1997/3/5	TOKYO	ABC1800	1997	OVERHEAT OCCURS	14
9	1997/3/6	TAKAMATSU	XYZ3000	1992	BATTERY IS DEAD	12
10	1997/3/6	NAGASAKI	KLM1200	1993	ENGINE WILL NOT START	8
11	1997/3/6	OSAKA	ABC1600	1994	EXHAUST IS BLACK	1
12	1997/3/6	NAGANO	DEF1600	1997	RADIO DOES NOT WORK	6
13	1997/3/6	MORIOKA	ABC1800	1996	PAINT IS PEELING	7
14	1997/3/6	SENDAI	XYZ3000	1995	HEATER DOES NOT FUNCTION	2
2801						2802
<CLASSIFICATION SET VALUE> NUMBER OF CLASSIFICATIONS : 30 CLASSIFICATION SPEECH PARTS : NOUNS						
CLASSIFICATION RESULT 1		CLASSIFICATION RESULT 2				
<		>				


29/56

FIG.29

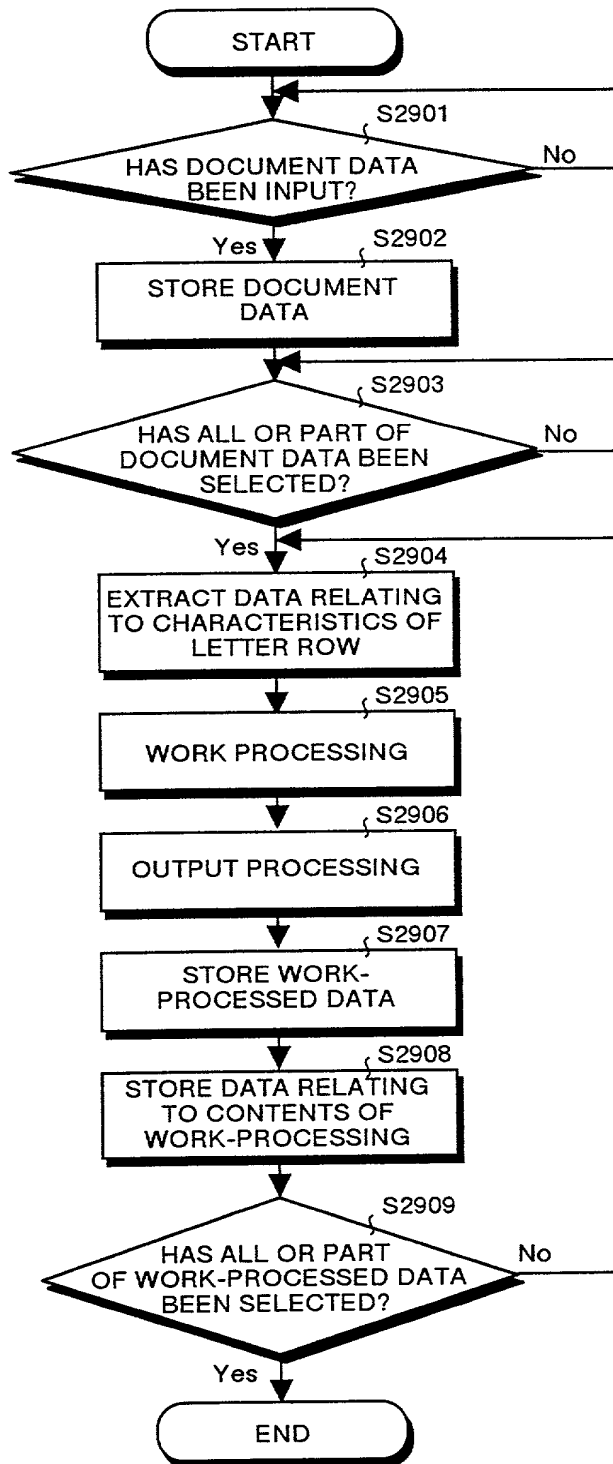

30/56

FIG.30

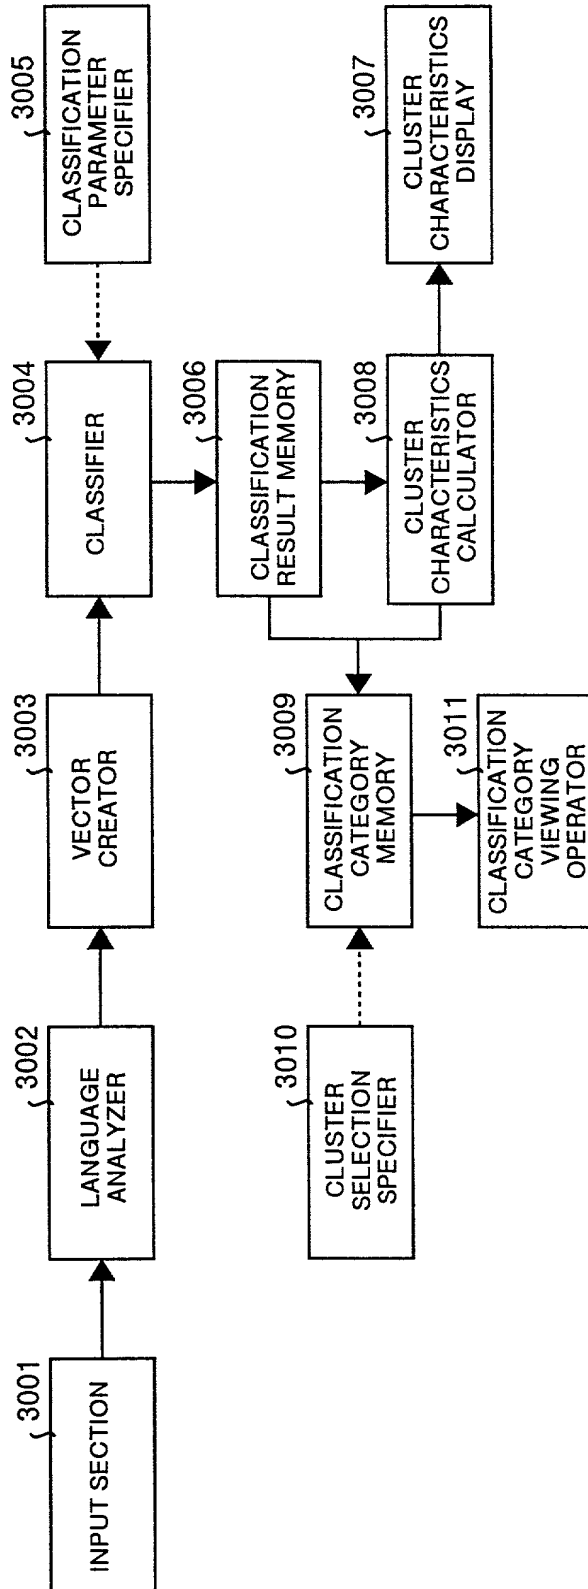


31/56

FIG.31

{ 3101		{ 3102		{ 3103		{ 3104		{ 3105	
CLUSTER ID	NUMBER OF MEMBERS	WORDS OF HIGH INCIDENCE		DOCUMENT CONTENTS		DEGREE OF RESEMBLANCE TO CENTER			
1	248	MANAGER, BUSY,...		MUCH SYSTEM MANAGEMENT WORK AND VERY BUSY		0.987			
				BUSY SYSTEM MANAGEMENT AND COSTS CANNOT BE REDUCED		0.965			
				WHEN MANAGER IS BUSY, SYSTEM BREAKS DOWN		0.911			
				MANAGEMENT DIFFICULT DUE TO SYSTEM BREAKDOWN		0.889			
				MANAGEMENT OFFICE IS BUSY DUE TO SYSTEM BREAKDOWN		0.876			
3110									
N		1498	OPERABILITY, POOR,....		SOFTWARE HAS POOR OPERABILITY		0.969		
					DIFFICULT TO REMEMBER SOFTWARE OPERABILITY		0.962		


32/56

FIG.32

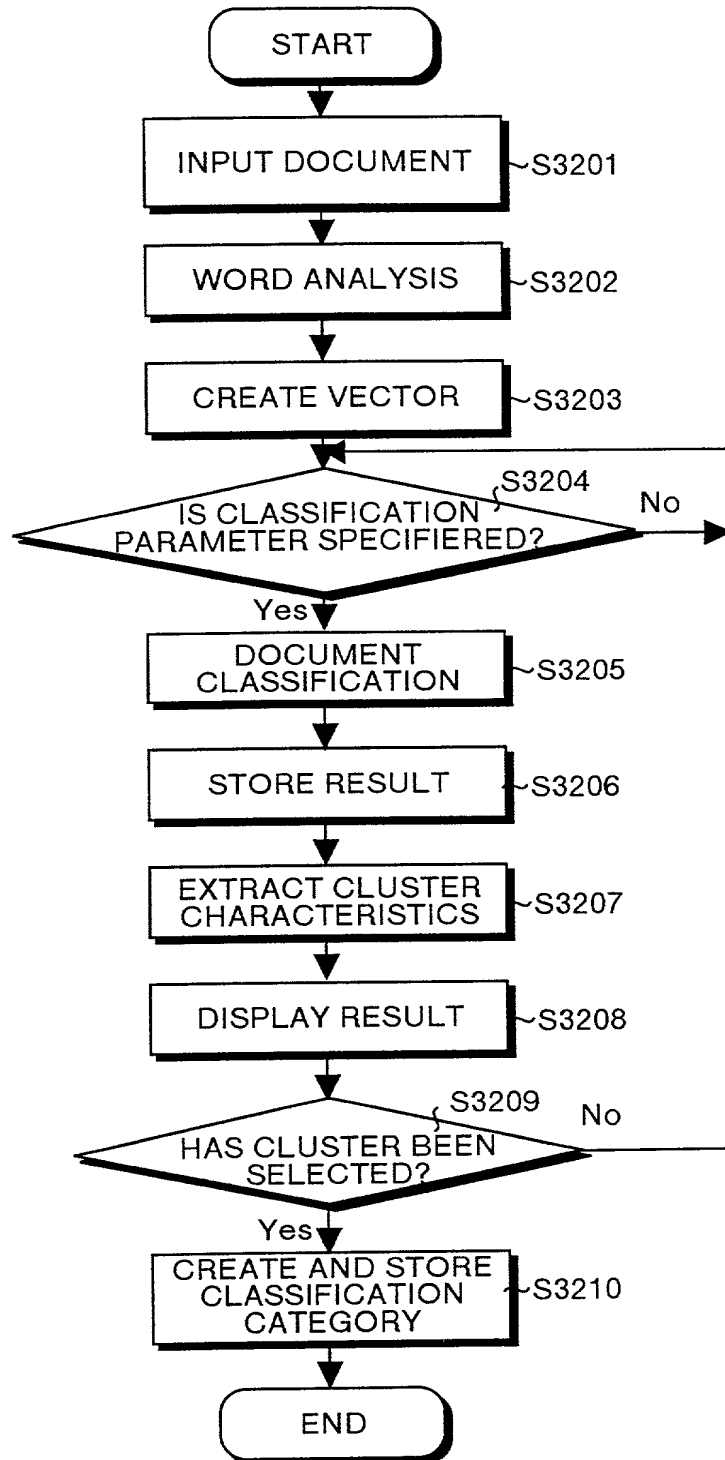

33/56

FIG. 33

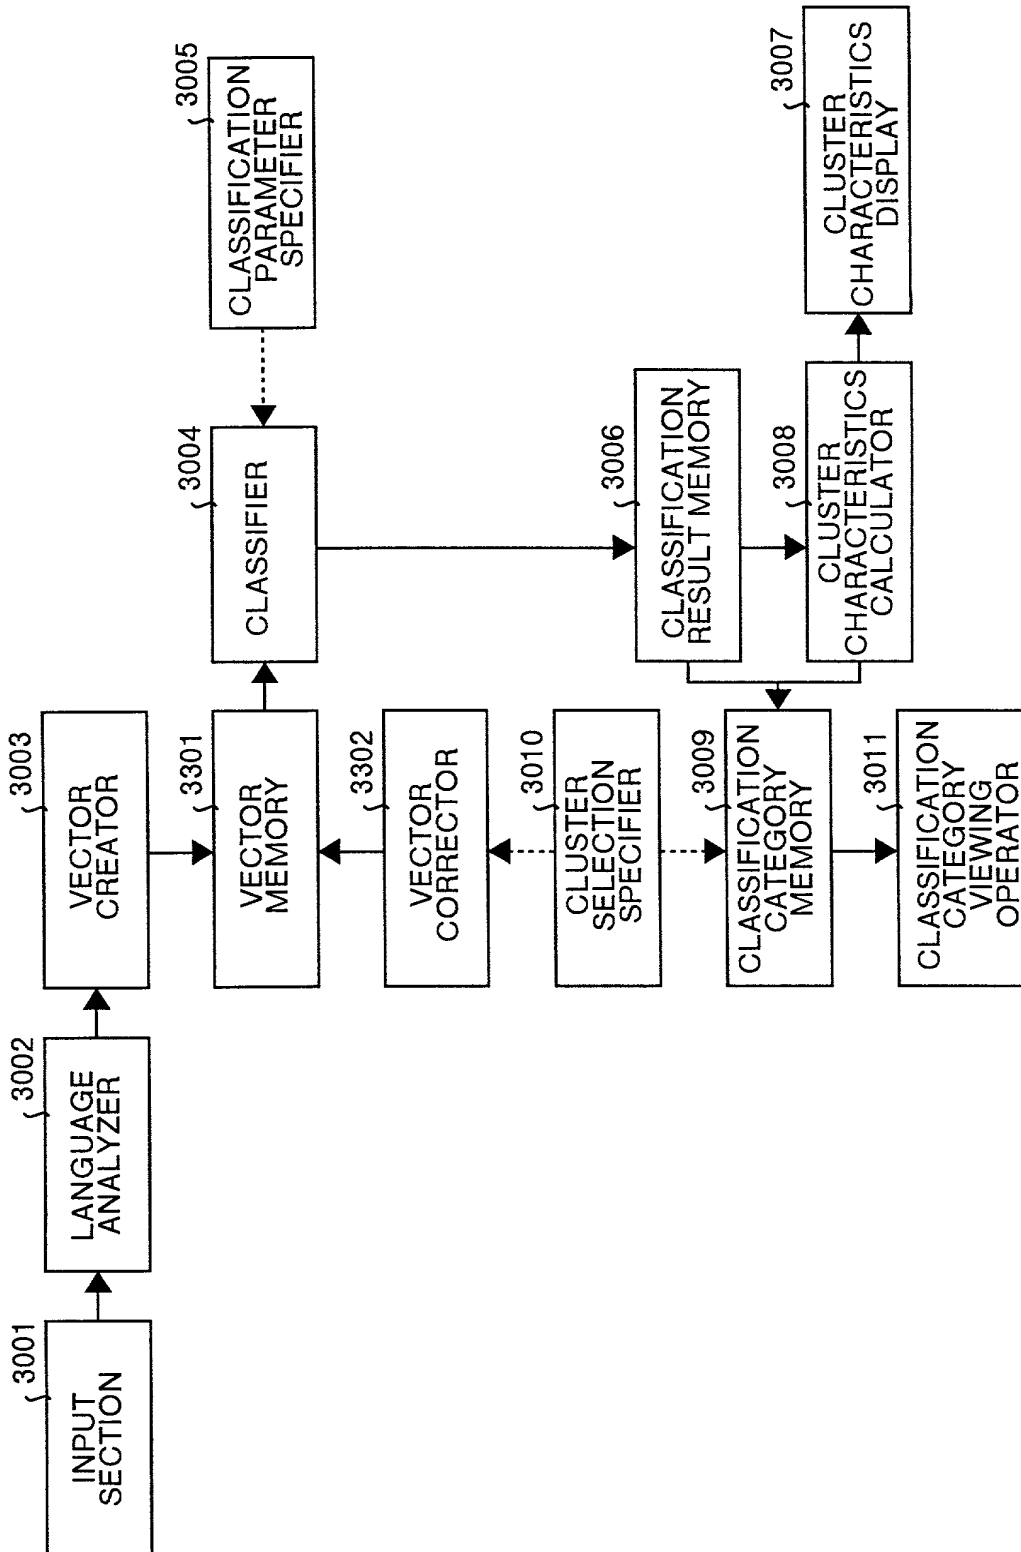

34/56

FIG.34



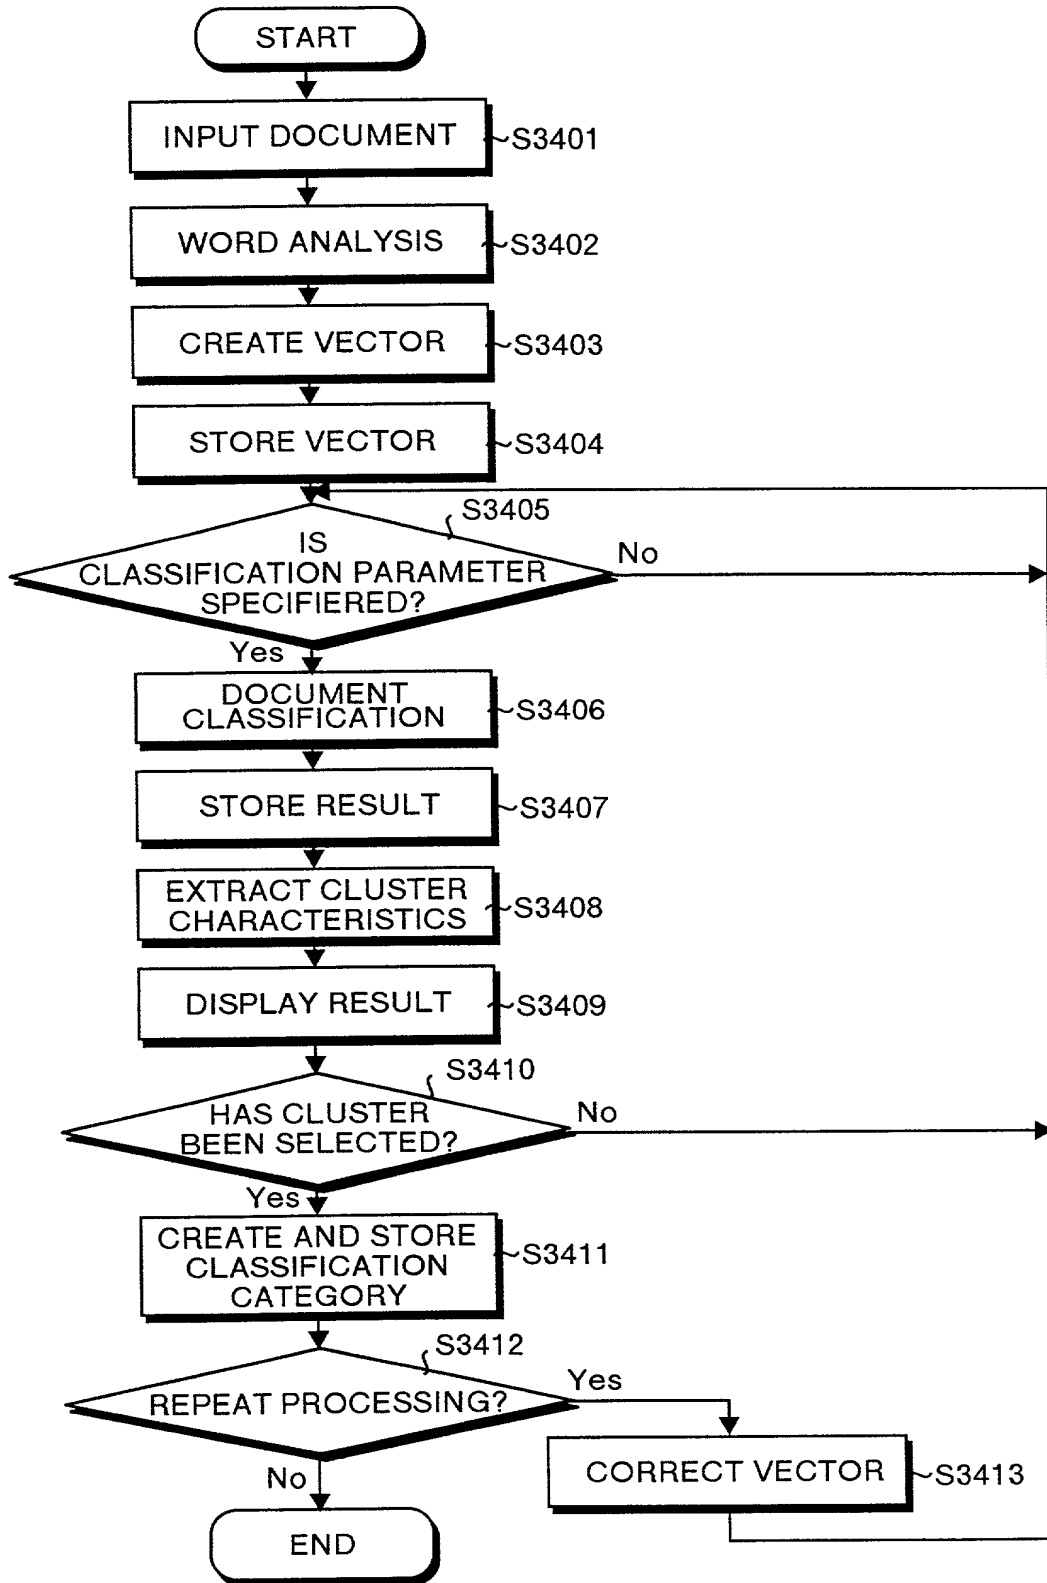


FIG.35

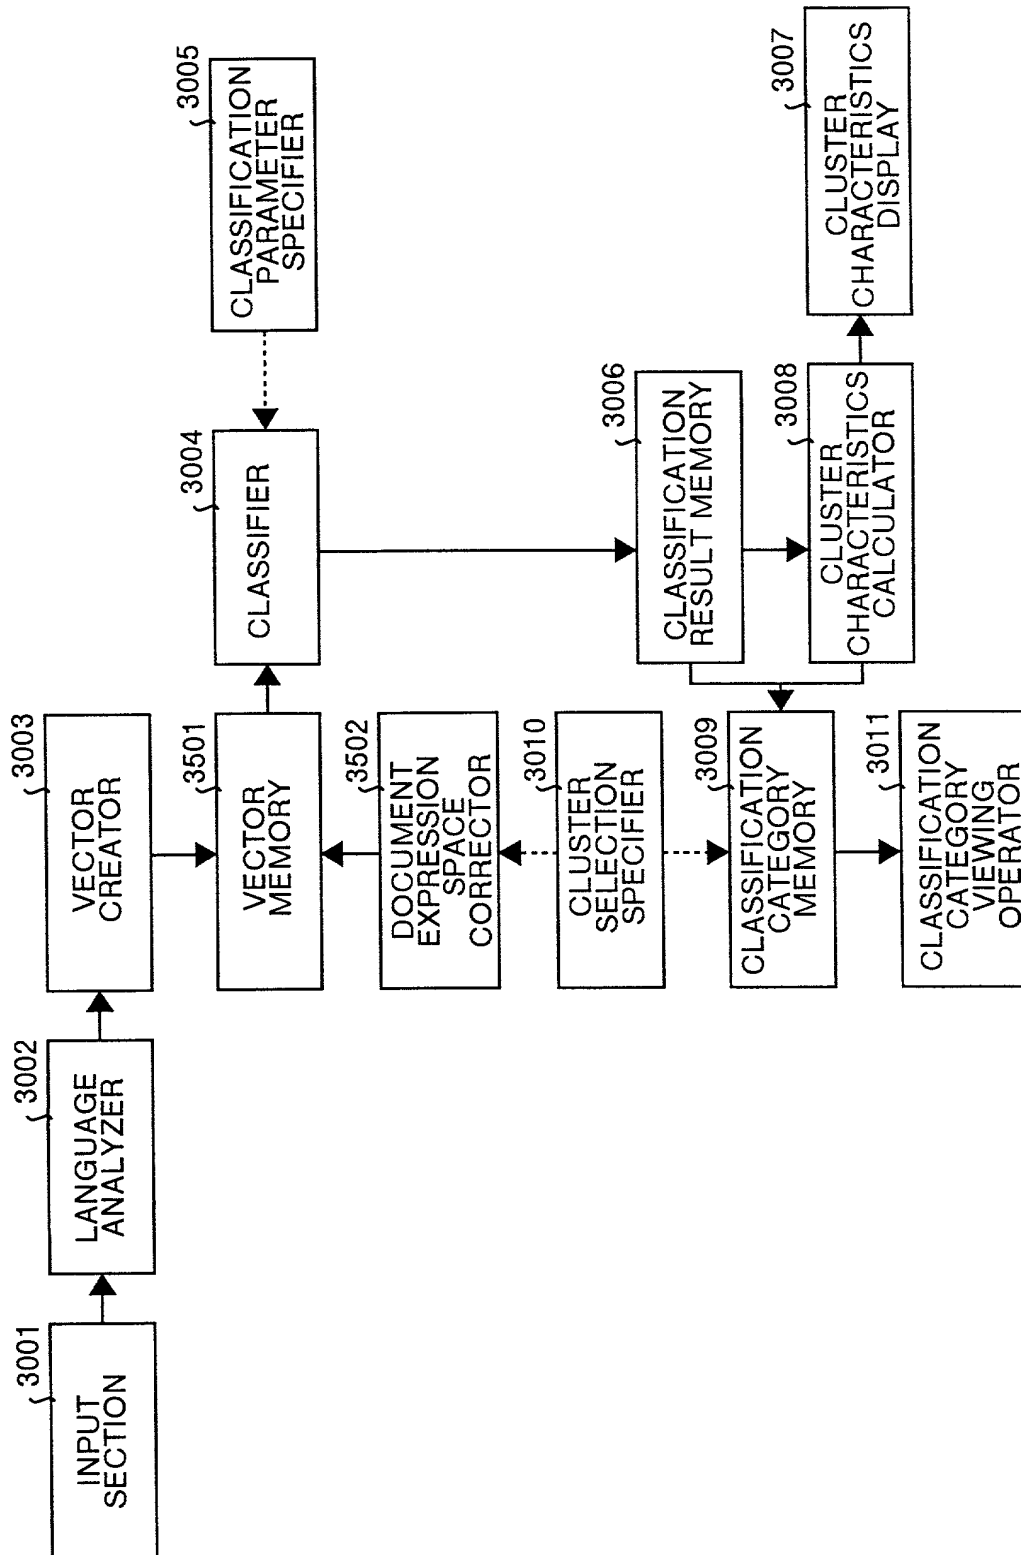


36/56

FIG.36

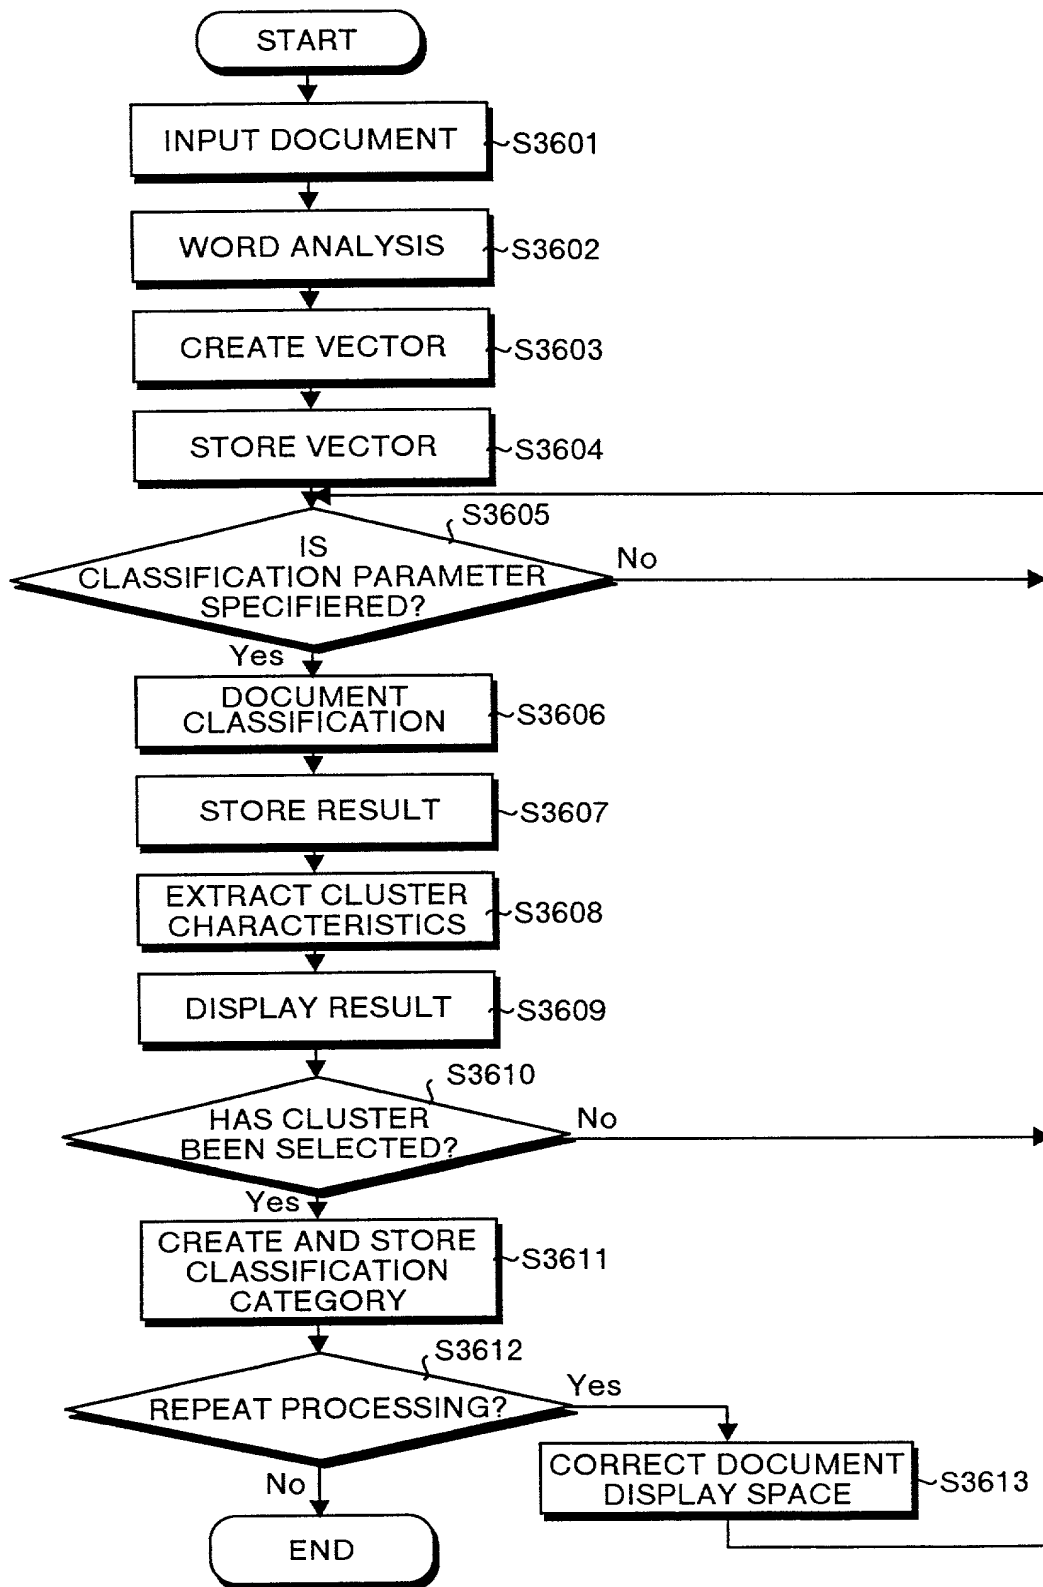

37/56

FIG.37

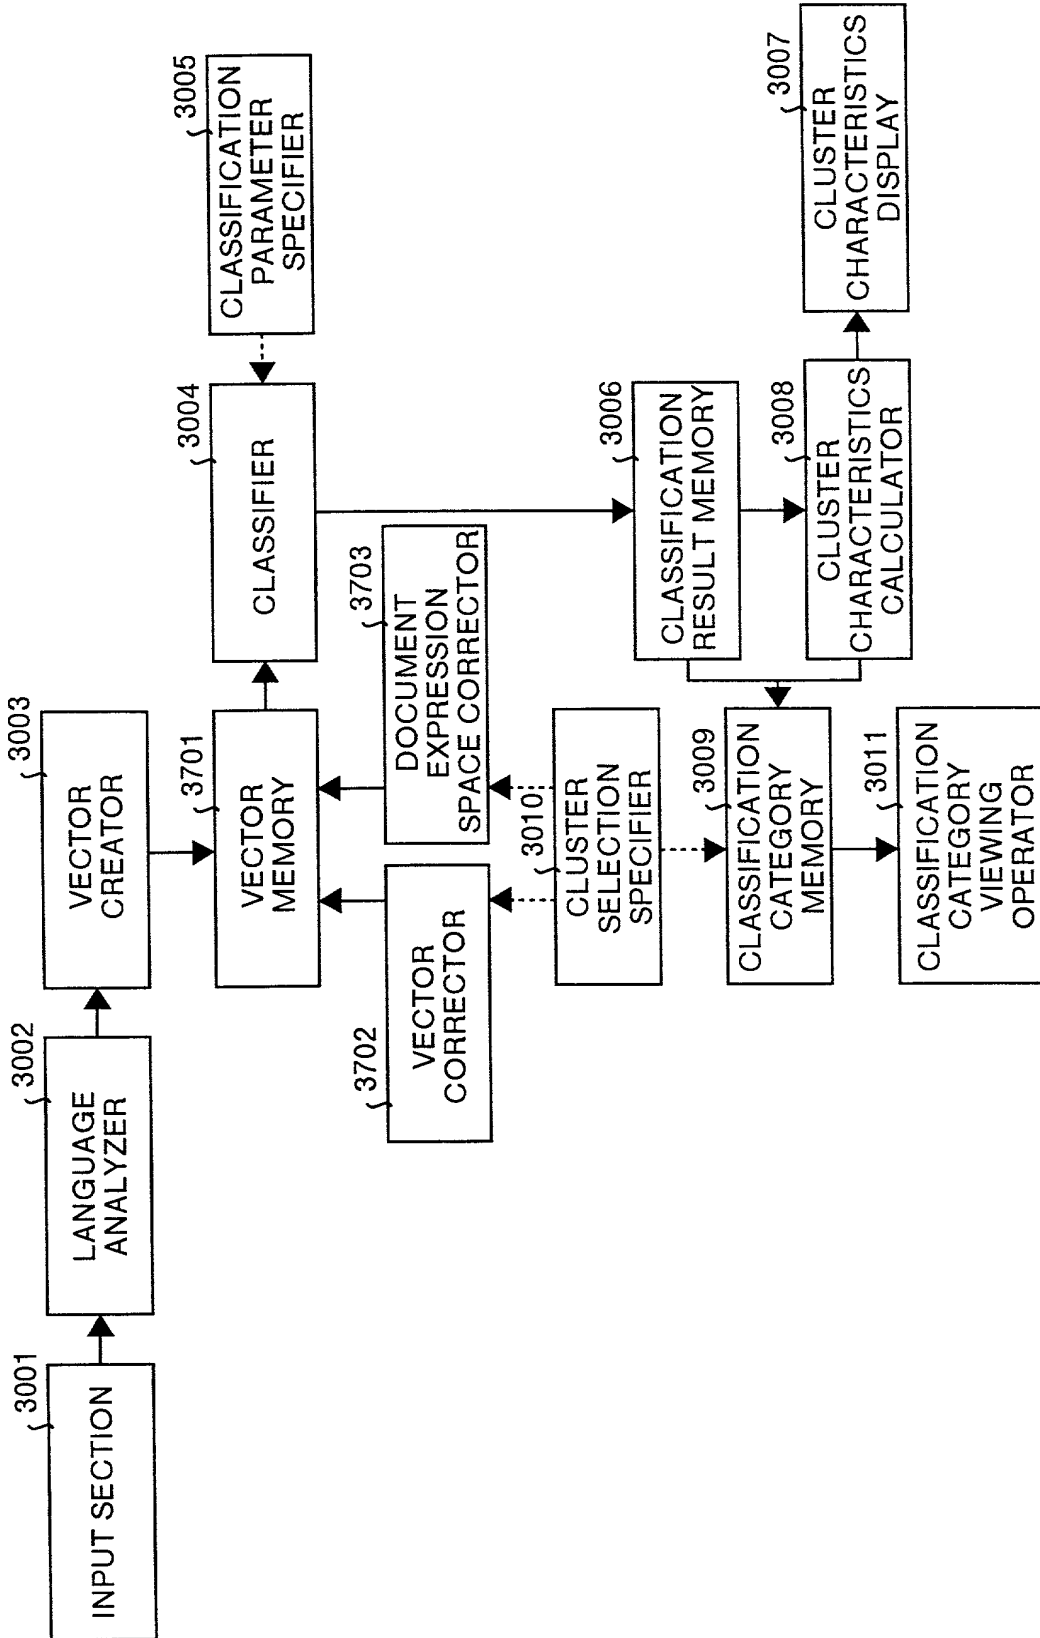

38/56

FIG.38

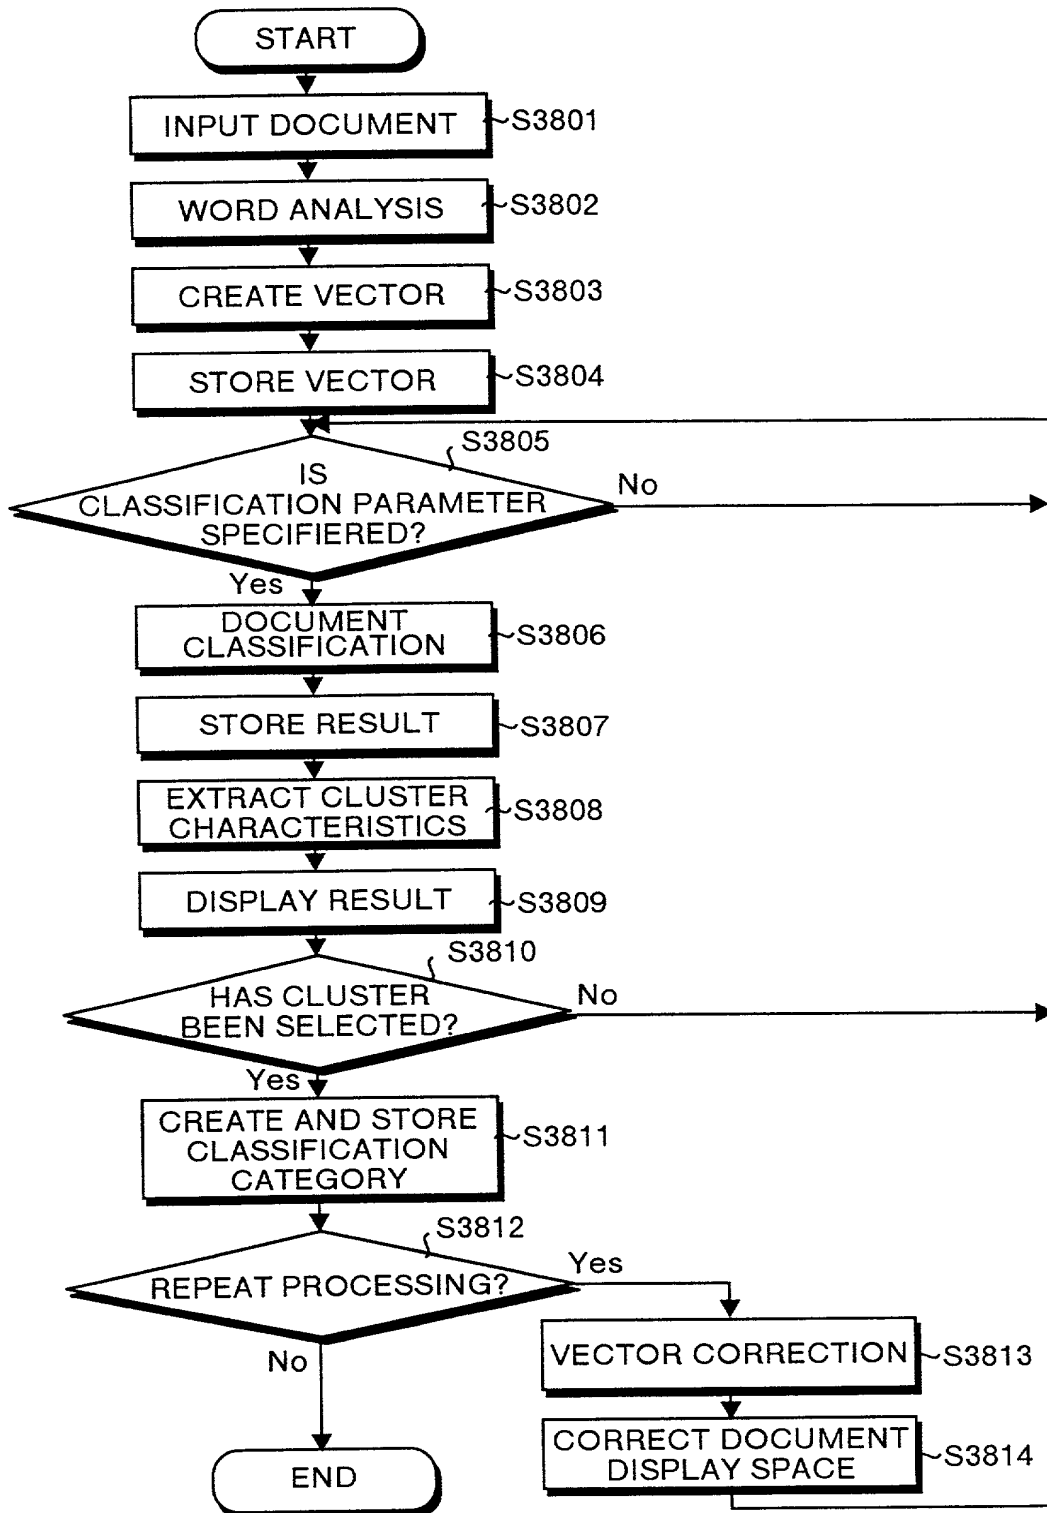


FIG.39

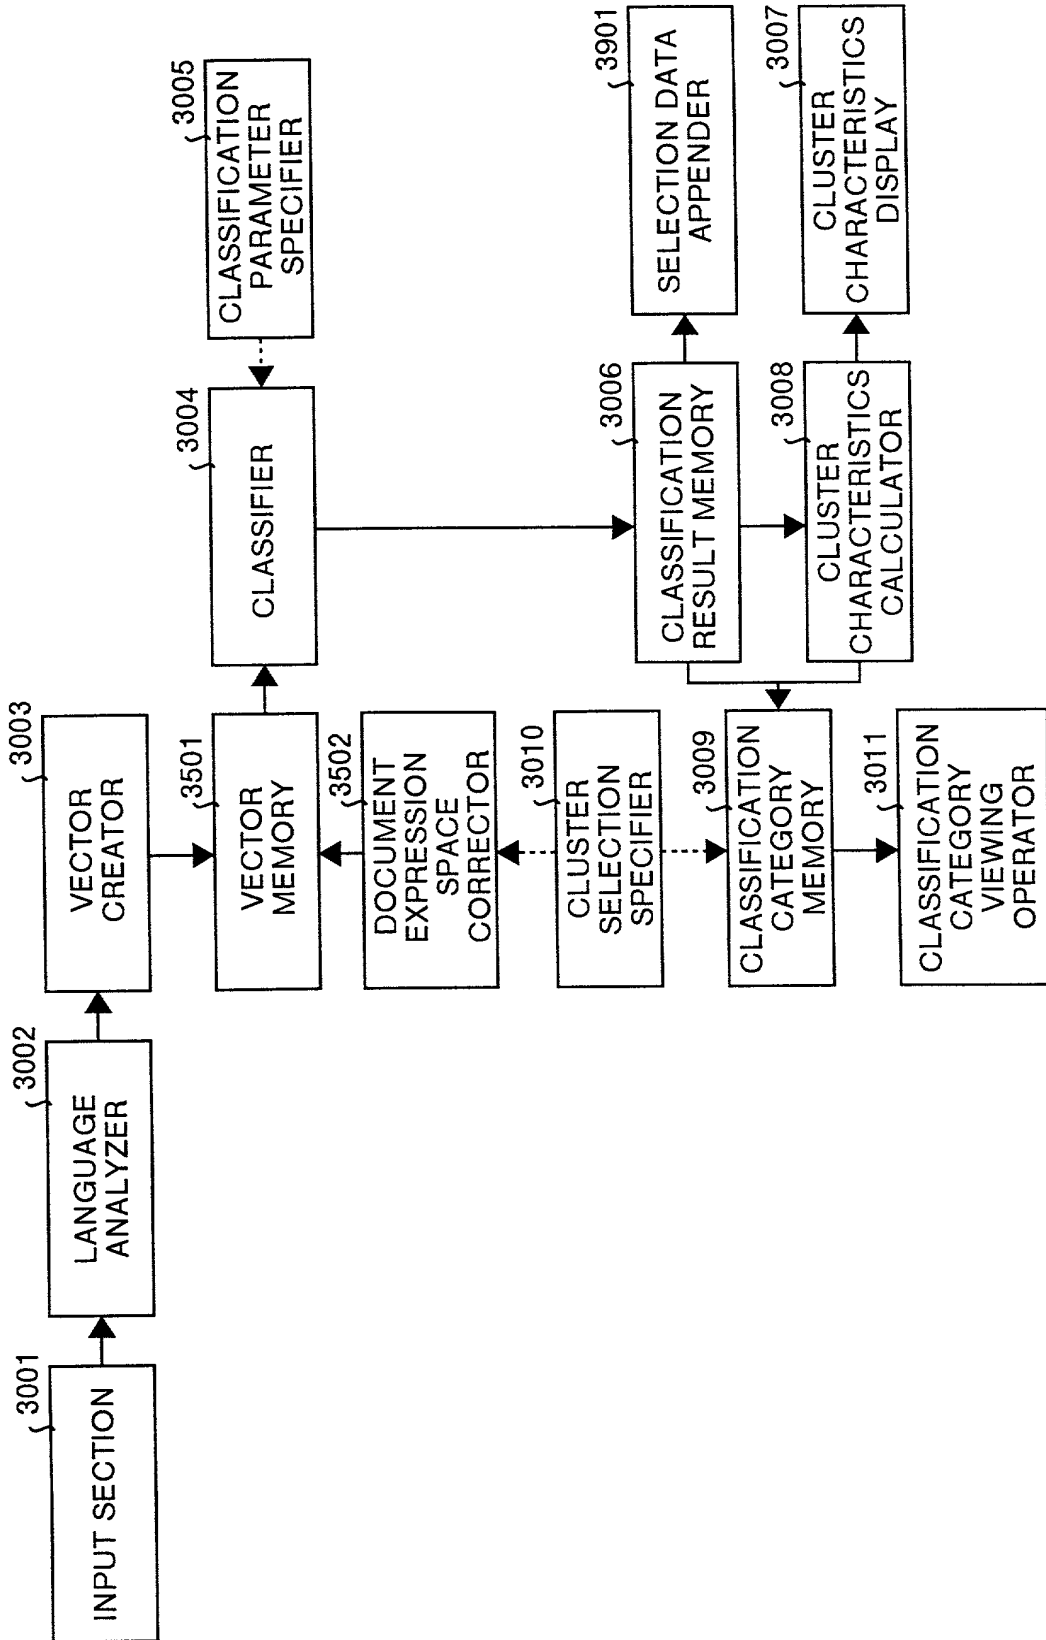



FIG.40

4000
↘

DOCUMENT ID	SEQUENCE OF CLASSIFICATIONS OF SELECTION DATA (1 =SELECTED / 0 = NOT SELECTED)
1	[1, 1, 0, 0]
2	[0, 0, 0, 0]
3	[0, 1, 0, 0]
}}	
n-1	[1, 0, 0, 0]
n	[0, 0, 0, 0]

41/56

FIG.41

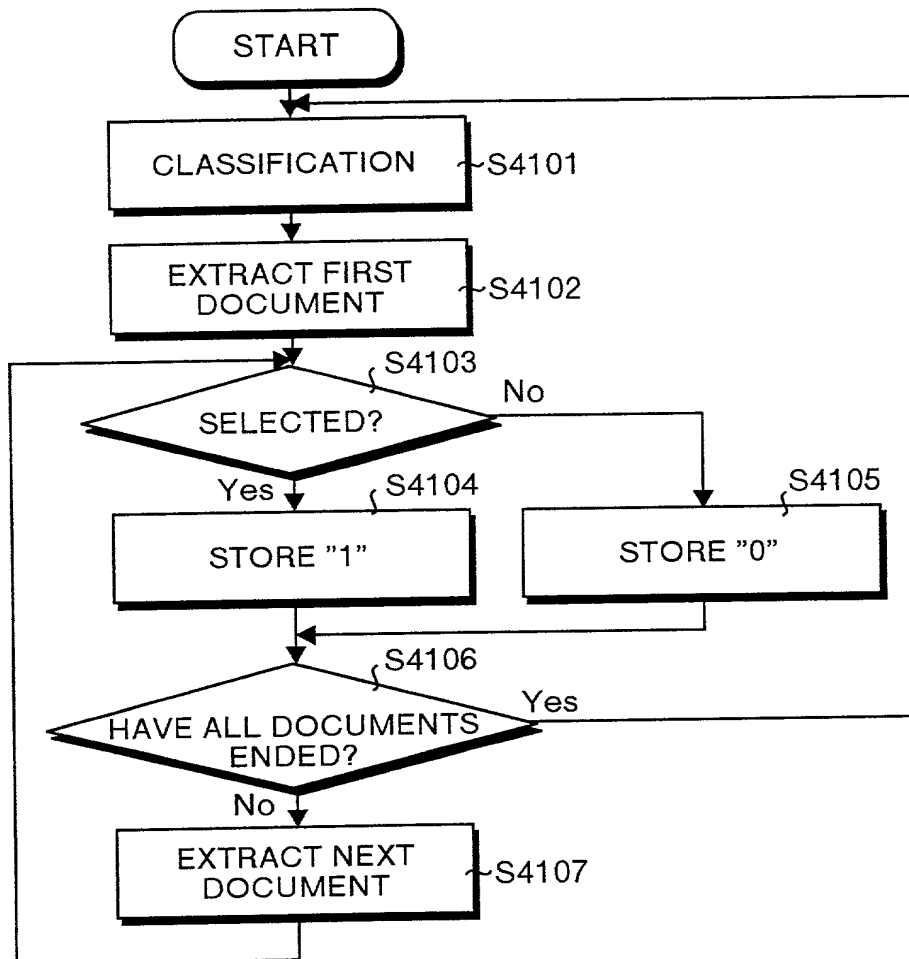

42/56

FIG.42

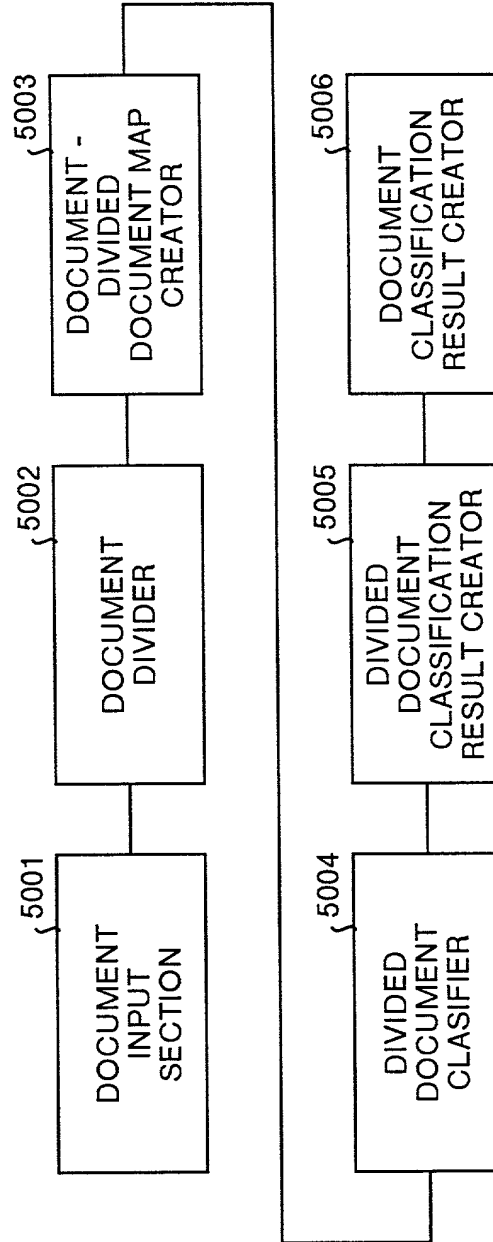


FIG.43

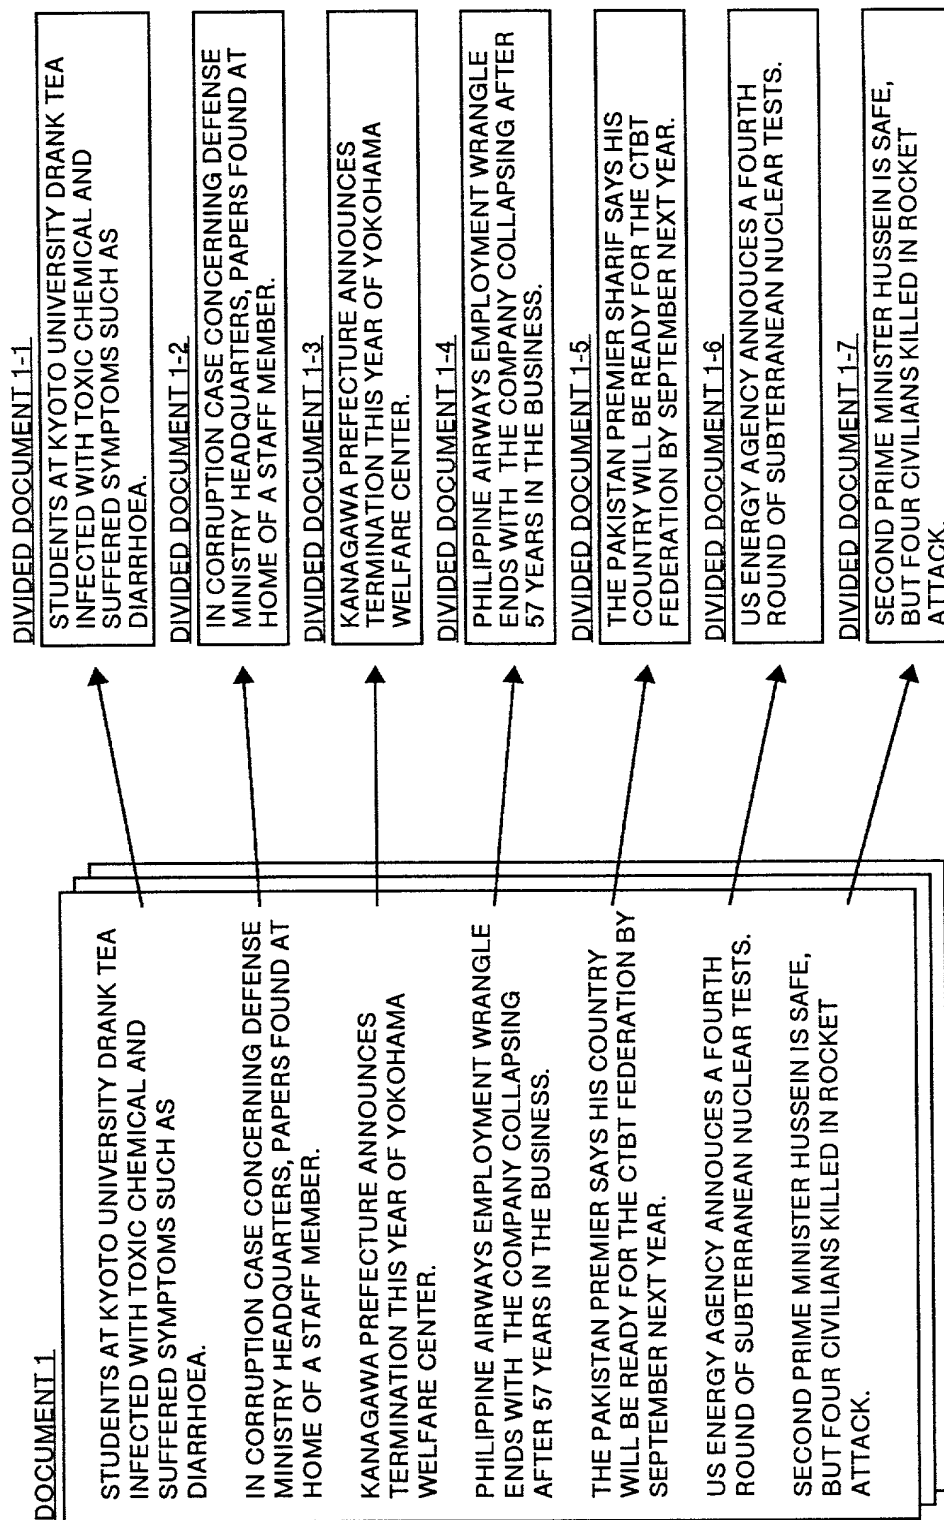


FIG.44

IDENTIFICATION NUMBER
LOCATED IN DOCUMENT DATA

	DOCUMENT DATA IDENTIFICATION NUMBER
DOCUMENT 1	1
DOCUMENT 2	2
DOCUMENT 3	3

DIVIDED IDENTIFICATION NUMBER
LOCATED IN DOCUMENT DATA

	DIVIDED DOCUMENT DATA IDENTIFICATION NUMBER
DOCUMENT 1	DIVIDED DOCUMENT 1
	DIVIDED DOCUMENT 2
	DIVIDED DOCUMENT 3
	DIVIDED DOCUMENT 4
	DIVIDED DOCUMENT 5
DOCUMENT 2	DIVIDED DOCUMENT 6
	DIVIDED DOCUMENT 7
	DIVIDED DOCUMENT 8
DOCUMENT 3	DIVIDED DOCUMENT 9
	DIVIDED DOCUMENT 10
	DIVIDED DOCUMENT 11
	DIVIDED DOCUMENT 12

DOCUMENT DATA IDENTIFICATION NUMBER	DIVIDED DOCUMENT DATA IDENTIFICATION NUMBER
1	1
1	2
1	3
1	4
1	5
2	6
2	7
2	8
3	9
3	10
3	11
3	12

MAP OF DOCUMENT - DIVIDED
DOCUMENT ACCORDING TO ID
NUMBER

031-4885-2 SHEET 44 OF 56

45/56

FIG.45

IDENTIFICATION NUMBER LOCATED IN DOCUMENT DATA

	DIVIDED DOCUMENT DATA IDENTIFICATION NUMBER	DIVIDED DOCUMENT DATA CHARACTERISTICS VECTOR
DIVIDED DOCUMENT 1	1	(1,1,1)
DIVIDED DOCUMENT 2	2	(5,5,5)
DIVIDED DOCUMENT 3	3	(3,2,4)
DIVIDED DOCUMENT 4	4	(3,2,3)
DIVIDED DOCUMENT 5	5	(5,4,6)
DIVIDED DOCUMENT 6	6	(1,2,1)
DIVIDED DOCUMENT 7	7	(1,0,1)
DIVIDED DOCUMENT 8	8	(5,4,5)
DIVIDED DOCUMENT 9	9	(2,2,4)
DIVIDED DOCUMENT 10	10	(2,1,1)
DIVIDED DOCUMENT 11	11	(4,4,6)
DIVIDED DOCUMENT 12	12	(5,5,6)

RESULT OF DIVIDING DIVIDED DOCUMENT DATA
INTO THREE CATEGORIES

DOCUMENT
CLASSIFICATION
(USING CLUSTER
ANALYSIS)

	DIVIDED DOCUMENT DATA IDENTIFICATION NUMBER	CLASSIFICATION CATEGORY	DISTANCE TO REPRESENTATIVE VALUE OF RELEVANT CATEGORY
DIVIDED DOCUMENT 1	1	CATEGORY 1	0.25
DIVIDED DOCUMENT 2	2	CATEGORY 3	0.87
DIVIDED DOCUMENT 3	3	CATEGORY 2	0.48
DIVIDED DOCUMENT 4	4	CATEGORY 2	0.74
DIVIDED DOCUMENT 5	5	CATEGORY 3	0.54
DIVIDED DOCUMENT 6	6	CATEGORY 1	1.03
DIVIDED DOCUMENT 7	7	CATEGORY 1	1.03
DIVIDED DOCUMENT 8	8	CATEGORY 3	0.70
DIVIDED DOCUMENT 9	9	CATEGORY 2	0.74
DIVIDED DOCUMENT 10	10	CATEGORY 1	0.75
DIVIDED DOCUMENT 11	11	CATEGORY 3	0.94
DIVIDED DOCUMENT 12	12	CATEGORY 3	0.83

DATA REPRESENTING CLASSIFICATION CATEGORY

	REPRESENTATIVE VALUE (CENTER OF RELEVANT DIVIDED DOCUMENT DATA)	NUMBER OF RELEVANT DATA
CATEGORY 1	(1.25, 1.00, 1.00)	4
CATEGORY 2	(2.66, 2.00, 3.66)	3
CATEGORY 3	(4.80, 4.00, 5.60)	5

DISTANCE BETWEEN CLASSIFICATION CATEGORIES

	CATEGORY 2	CATEGORY 3
CATEGORY 1	3.17	6.68
CATEGORY 2		3.69

FIG.46

DOCUMENT CLASSIFICATION RESULTS

CLASSIFICATION CATEGORY	DIVIDED DOCUMENT	DEGREE OF RESEMBLANCE	RELEVANT DOCUMENT	AREA OCCUPIED BY DOCUMENT	RELATIVE POSITION	RESEMBLANCE RANKING
CATEGORY 1	DOCUMENT 1	0.25	DOCUMENT 1	1/5	1/5	1
CATEGORY 1	DOCUMENT 6	1.03	DOCUMENT 2	2/3	1/3	3
CATEGORY 1	DOCUMENT 7	1.03	DOCUMENT 2	2/3	2/3	3
CATEGORY 1	DOCUMENT 10	0.75	DOCUMENT 3	1/4	2/4	2
CATEGORY 2	DOCUMENT 3	0.48	DOCUMENT 1	2/5	3/5	1
CATEGORY 2	DOCUMENT 4	0.74	DOCUMENT 2	2/5	4/5	2
CATEGORY 2	DOCUMENT 9	0.74	DOCUMENT 3	1/4	1/4	2
CATEGORY 3	DOCUMENT 2	0.87	DOCUMENT 1	2/5	2/5	4
CATEGORY 3	DOCUMENT 5	0.54	DOCUMENT 1	2/5	5/5	1
CATEGORY 3	DOCUMENT 8	0.70	DOCUMENT 2	1/3	3/3	2
CATEGORY 3	DOCUMENT 11	0.94	DOCUMENT 3	2/4	3/4	4
CATEGORY 3	DOCUMENT 12	0.83	DOCUMENT 3	2/4	4/4	3

FIG.47

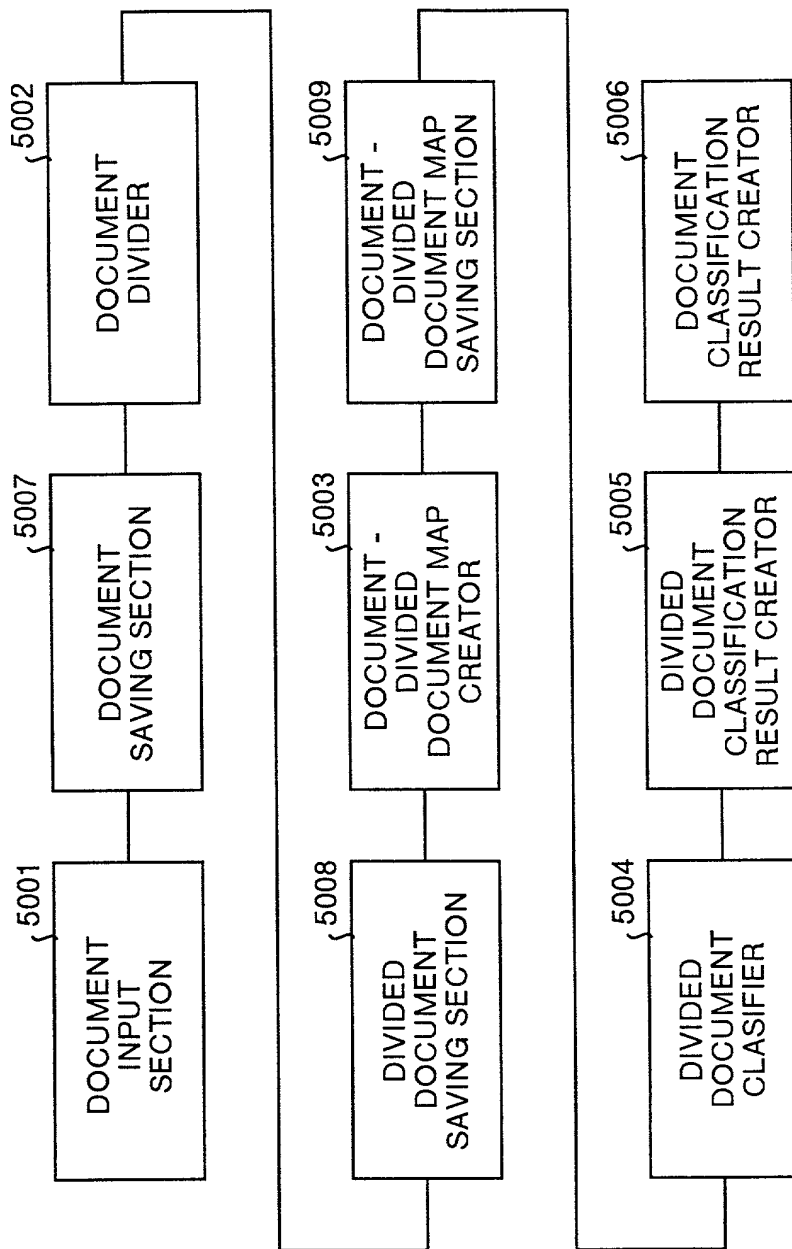


FIG. 48

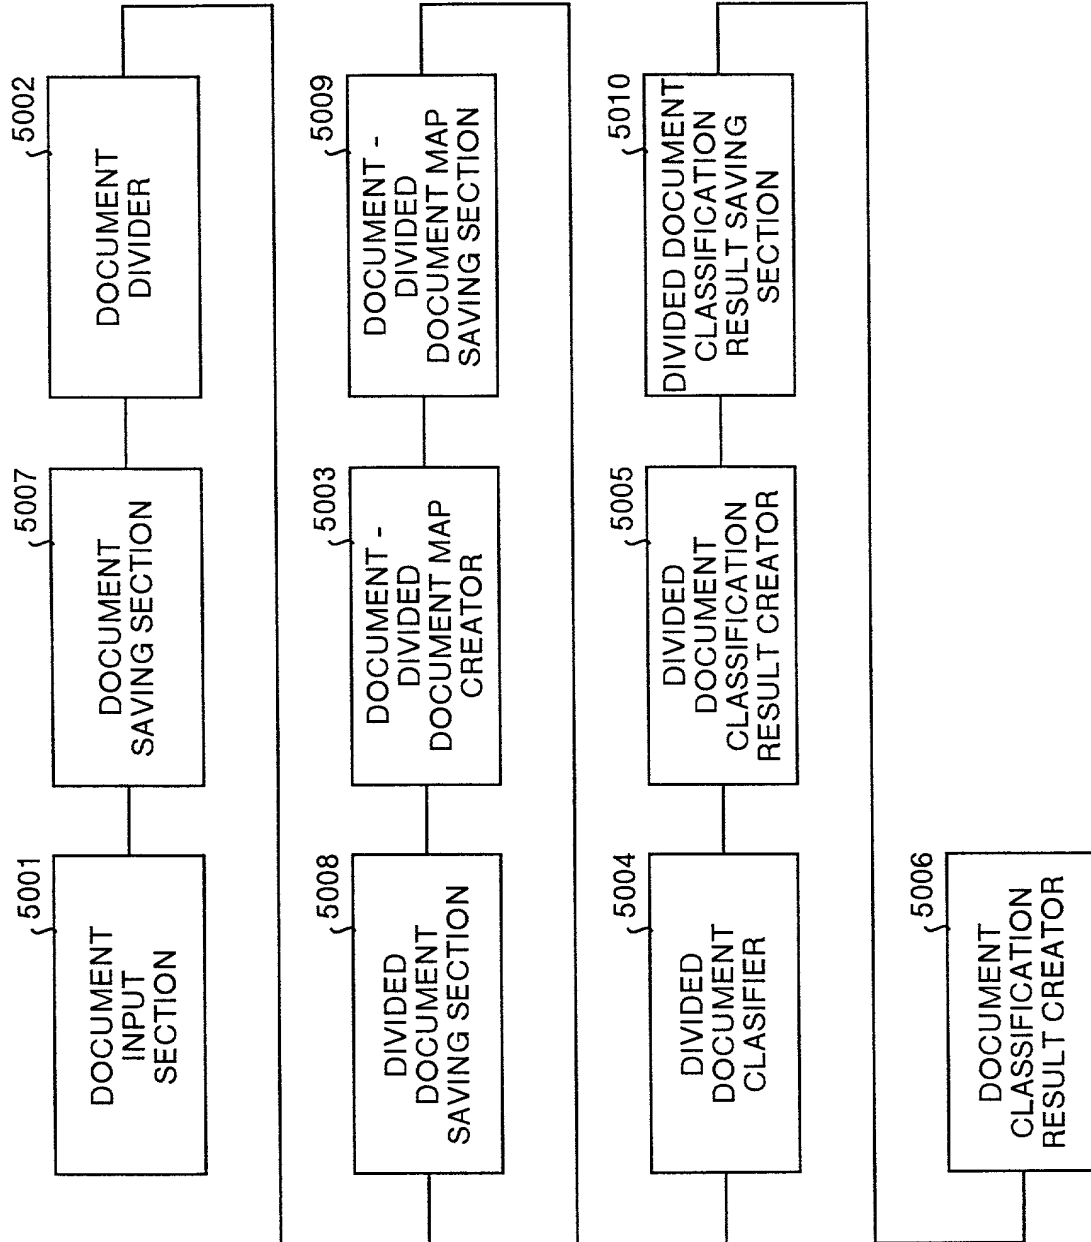


FIG.49

DOCUMENT 1

STUDENTS AT KYOTO UNIVERSITY DRANK TEA INFECTED WITH TOXIC CHEMICAL AND SUFFERED SYMPTOMS SUCH AS DIARRHOEA.

IN CORRUPTION CASE CONCERNING DEFENSE MINISTRY HEADQUARTERS, PAPERS FOUND AT HOME OF A STAFF MEMBER.

KANAGAWA PREFECTURE ANNOUNCES TERMINATION THIS YEAR OF YOKOHAMA WELFARE CENTER.

PHILIPPINE AIRWAYS EMPLOYMENT WRANGLE ENDS WITH THE COMPANY COLLAPSING AFTER 57 YEARS IN THE BUSINESS.

THE PAKISTAN PREMIER SHARIF SAYS HIS COUNTRY WILL BE READY FOR THE CTBT FEDERATION BY SEPTEMBER NEXT YEAR.

US ENERGY AGENCY ANNOUNCES A FOURTH ROUND OF SUBTERRANEAN NUCLEAR TESTS.

SECOND PRIME MINISTER HUSSEIN IS SAFE, BUT FOUR CIVILIANS KILLED IN ROCKET ATTACK.

DIVIDED DOCUMENT 1-1

STUDENTS AT KYOTO UNIVERSITY DRANK TEA INFECTED WITH TOXIC CHEMICAL AND SUFFERED SYMPTOMS SUCH AS DIARRHOEA.

DIVIDED DOCUMENT 1-2

IN CORRUPTION CASE CONCERNING DEFENSE MINISTRY HEADQUARTERS, PAPERS FOUND AT HOME OF A STAFF MEMBER.

DIVIDED DOCUMENT 1-3

KANAGAWA PREFECTURE ANNOUNCES TERMINATION THIS YEAR OF YOKOHAMA WELFARE CENTER.

DIVIDED DOCUMENT 1-4

PHILIPPINE AIRWAYS EMPLOYMENT WRANGLE ENDS WITH THE COMPANY COLLAPSING AFTER 57 YEARS IN THE BUSINESS.

DIVIDED DOCUMENT 1-5

THE PAKISTAN PREMIER SHARIF SAYS HIS COUNTRY WILL BE READY FOR THE CTBT FEDERATION BY SEPTEMBER NEXT YEAR.

DIVIDED DOCUMENT 1-6

US ENERGY AGENCY ANNOUNCES A FOURTH ROUND OF SUBTERRANEAN NUCLEAR TESTS.

DIVIDED DOCUMENT 1-7

SECOND PRIME MINISTER HUSSEIN IS SAFE, BUT FOUR CIVILIANS KILLED IN ROCKET ATTACK.

DIVIDED DOCUMENT 1-8

STUDENTS AT KYOTO UNIVERSITY DRANK TEA INFECTED WITH TOXIC CHEMICAL AND SUFFERED SYMPTOMS SUCH AS DIARRHOEA.

IN CORRUPTION CASE CONCERNING DEFENSE MINISTRY HEADQUARTERS, PAPERS FOUND AT HOME OF A STAFF MEMBER.

KANAGAWA PREFECTURE ANNOUNCES TERMINATION THIS YEAR OF YOKOHAMA WELFARE CENTER.

PHILIPPINE AIRWAYS EMPLOYMENT WRANGLE ENDS WITH THE COMPANY COLLAPSING AFTER 57 YEARS IN THE BUSINESS.

THE PAKISTAN PREMIER SHARIF SAYS HIS COUNTRY WILL BE READY FOR THE CTBT FEDERATION BY SEPTEMBER NEXT YEAR.

US ENERGY AGENCY ANNOUNCES A FOURTH ROUND OF SUBTERRANEAN NUCLEAR TESTS.

SECOND PRIME MINISTER HUSSEIN IS SAFE, BUT FOUR CIVILIANS KILLED IN ROCKET ATTACK.

662227-6422460

50/56

FIG.50

DOCUMENT DATA

- STUDENTS AT KYOTO UNIVERSITY DRANK TEA INFECTED WITH TOXIC CHEMICAL AND SUFFERED SYMPTOMS SUCH AS DIARRHOEA.
- IN CORRUPTION CASE CONCERNING DEFENSE MINISTRY HEADQUARTERS, PAPERS FOUND AT HOME OF A STAFF MEMBER.
- KANAGAWA PREFECTURE ANNOUNCES TERMINATION THIS YEAR OF YOKOHAMA WELFARE CENTER.
- PHILIPPINE AIRWAYS EMPLOYMENT WRANGLE ENDS WITH THE COMPANY COLLAPSING AFTER 57 YEARS IN THE BUSINESS.
- THE PAKISTAN PREMIER SHARIF SAYS HIS COUNTRY WILL BE READY FOR THE CTBT FEDERATION BY SEPTEMBER NEXT YEAR.
- US ENERGY AGENCY ANNOUNCES A FOURTH ROUND OF SUBTERRANEAN NUCLEAR TESTS.
- SECOND PRIME MINISTER HUSSEIN IS SAFE, BUT FOUR CIVILIANS KILLED IN ROCKET ATTACK.

HTML FORMAT

```

<HTML>
<HEAD>
  <META NAME="GENERATOR" CONTENT="Claris Home Page 2.0J">
  <META HTTP-EQUIV="CONTENT-TYPE" CONTENT="text/html; charset=Shift_JIS">
  <X-SAS=WINDOW TOP=64 BOTTOM=769 LEFT=224 RIGHT=658>
</HEAD>
<BODY>
  <P> NEWS TOPIC (98/09/25) </P>
  <UL>
    <LI>STUDENTS AT KYOTO UNIVERSITY DRANK TEA INFECTED WITH TOXIC CHEMICAL AND SUFFERED SYMPTOMS SUCH AS DIARRHOEA.</LI>
    <LI>IN CORRUPTION CASE CONCERNING DEFENSE MINISTRY HEADQUARTERS, PAPERS FOUND AT HOME OF A STAFF MEMBER.</LI>
    <LI>KANAGAWA PREFECTURE ANNOUNCES TERMINATION THIS YEAR OF YOKOHAMA WELFARE CENTER.</LI>
    <LI>PHILIPPINE AIRWAYS EMPLOYMENT WRANGLE ENDS WITH&NBSP; THE COMPANY COLLAPSING AFTER 57 YEARS IN THE BUSINESS.</LI>
    <LI>THE PAKISTAN PREMIER SHARIF SAYS HIS COUNTRY WILL BE READY FOR THE CTBT FEDERATION BY SEPTEMBER NEXT YEAR.</LI>
    <LI>US ENERGY AGENCY ANNOUNCES A FOURTH ROUND OF SUBTERRANEAN NUCLEAR TESTS.</LI>
    <LI>SECOND PRIME MINISTER HUSSEIN IS SAFE, BUT FOUR CIVILIANS KILLED IN ROCKET ATTACK.</LI>
  </UL>
</BODY>
</HTML>

```

DIVISION OF DOCUMENT DATA

|| CONVERT TEXT WITH TAG INTO ONE DIVIDED DOCUMENT DATA ||

DIVIDED DOCUMENT DATADIVIDED DOCUMENT 1

STUDENTS AT KYOTO UNIVERSITY DRANK TEA INFECTED WITH TOXIC CHEMICAL AND SUFFERED SYMPTOMS SUCH AS DIARRHOEA.

DIVIDED DOCUMENT 3

KANAGAWA PREFECTURE ANNOUNCES TERMINATION THIS YEAR OF YOKOHAMA WELFARE CENTER.

DIVIDED DOCUMENT 5

THE PAKISTAN PREMIER SHARIF SAYS HIS COUNTRY WILL BE READY FOR THE CTBT FEDERATION BY SEPTEMBER NEXT YEAR.

DIVIDED DOCUMENT 7

SECOND PRIME MINISTER HUSSEIN IS SAFE, BUT FOUR CIVILIANS KILLED IN ROCKET ATTACK.

DIVIDED DOCUMENT 2

IN CORRUPTION CASE CONCERNING DEFENSE MINISTRY HEADQUARTERS, PAPERS FOUND AT HOME OF A STAFF MEMBER.

DIVIDED DOCUMENT 4

PHILIPPINE AIRWAYS EMPLOYMENT WRANGLE ENDS WITH THE COMPANY COLLAPSING AFTER 57 YEARS IN THE BUSINESS.

DIVIDED DOCUMENT 6

US ENERGY AGENCY ANNOUNCES A FOURTH ROUND OF SUBTERRANEAN NUCLEAR TESTS.

FIG.51

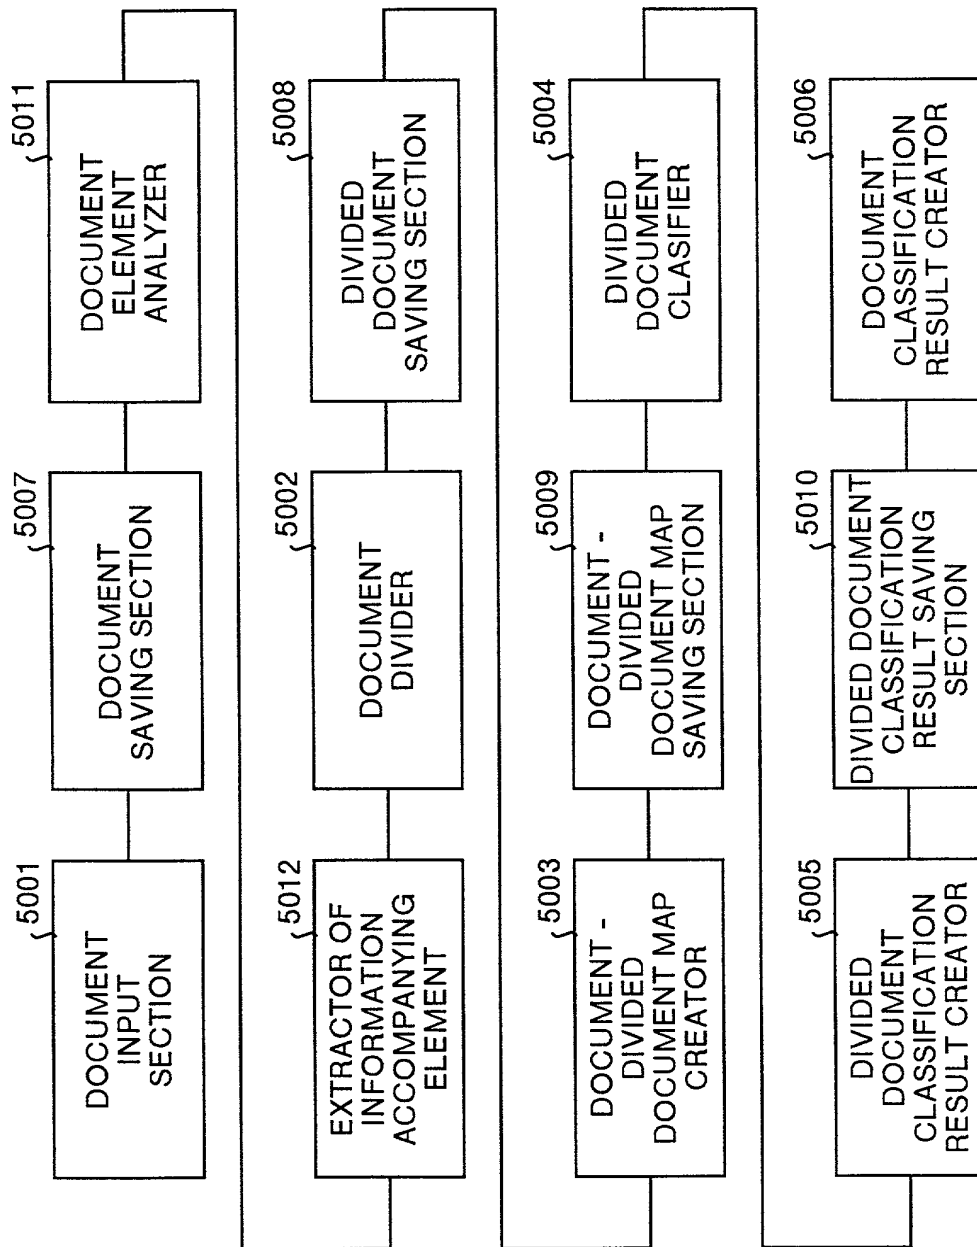


FIG.52

DOCUMENT DATA

"TOPIC" + NUMBER + RETURN SYMBOL

NEWS TOPIC (98/10/25)

TOPIC1
STUDENTS AT KYOTO UNIVERSITY DRANK TEA
INFECTED WITH TOXIC CHEMICAL AND
SUFFERED SYMPTOMS SUCH AS
DIARRHOEA.

TOPIC2
IN CORRUPTION CASE CONCERNING
DEFENSE MINISTRY HEADQUARTERS, PAPERS
FOUND AT HOME OF A STAFF MEMBER.

TOPIC3
KANAGAWA PREFECTURE ANNOUNCES
TERMINATION THIS YEAR OF YOKOHAMA
WELFARE CENTER.

TOPIC4
PHILIPPINE AIRWAYS EMPLOYMENT
WRANGLE ENDS WITH THE COMPANY
COLLAPSING AFTER 57 YEARS IN THE
BUSINESS.

TOPIC5
THE PAKISTAN PREMIER SHARIF SAYS HIS
COUNTRY WILL BE READY FOR THE CTBT
FEDERATION BY SEPTEMBER NEXT YEAR.

DOCUMENT END SYMBOL

NATURAL LANGUAGE PROCESSING

EXTRACT NOUN ("TOPIC" AND NUMBER) AND RETURN SYMBOL

EXTRACT POSITIONS OF NOUN ("TOPIC" AND NUMBER) AND
RETURN SYMBOL WITHIN DOCUMENT

DETECT POSITION OF LETTER ROW OF "TOPIC" + NUMBER +
RETURN SYMBOL

DIVISION OF DOCUMENT DATA

WITH "TOPIC" + NUMBERS + RETURN SYMBOL AS THE HEADER,
DEEM A LETTER ROW COMPRISING "TOPIC" + NUMBERS +
RETURN SYMBOL, OR A LETTER ROW SURROUNDED BY A
DOCUMENT END SYMBOL, AS ONE DIVIDED DOCUMENT DATA

DIVIDED DOCUMENT DATA

DIVIDED DOCUMENT 1

STUDENTS AT KYOTO UNIVERSITY DRANK
TEA INFECTED WITH TOXIC CHEMICAL AND
SUFFERED SYMPTOMS SUCH AS
DIARRHOEA.

DIVIDED DOCUMENT 3

KANAGAWA PREFECTURE ANNOUNCES
TERMINATION THIS YEAR OF YOKOHAMA
WELFARE CENTER.

DIVIDED DOCUMENT 5

THE PAKISTAN PREMIER SHARIF SAYS HIS
COUNTRY WILL BE READY FOR THE CTBT
FEDERATION BY SEPTEMBER NEXT YEAR.

DIVIDED DOCUMENT 2


IN CORRUPTION CASE CONCERNING
DEFENSE MINISTRY HEADQUARTERS, PAPERS
FOUND AT HOME OF A STAFF MEMBER.

DIVIDED DOCUMENT 4

PHILIPPINE AIRWAYS EMPLOYMENT WRANGLE
ENDS WITH THE COMPANY COLLAPSING AFTER
57 YEARS IN THE BUSINESS.

53/56

FIG.53

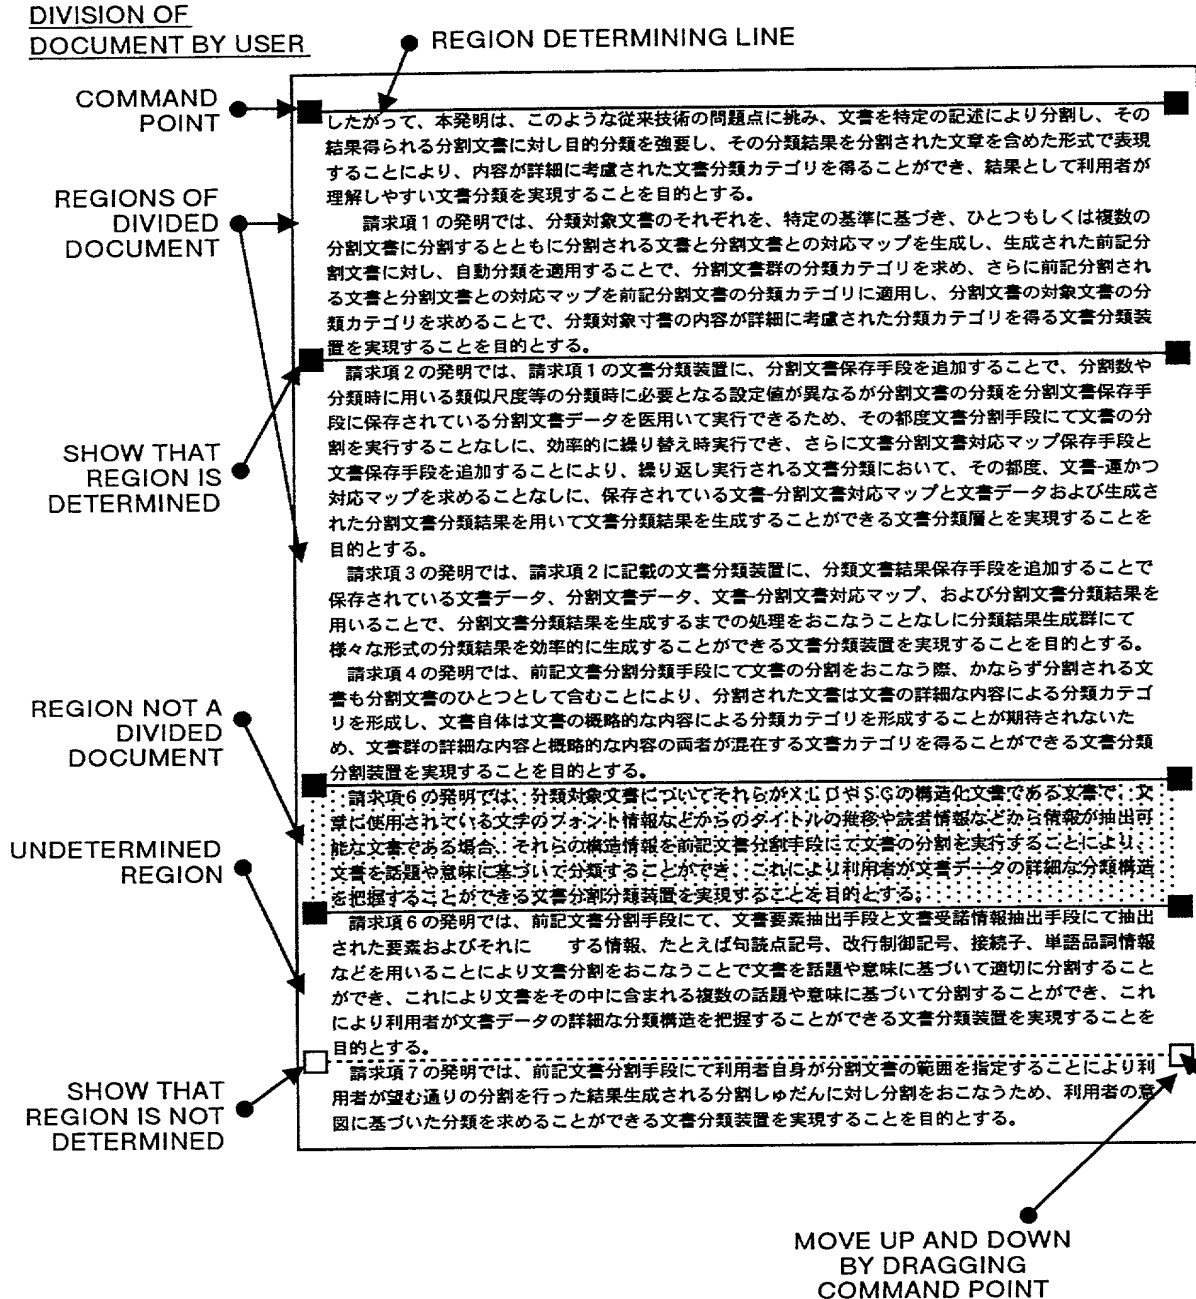

54/56

FIG.54

DIVISION ACCORDING TO NUMBER OF
LETTERS AND NUMBER OF SENTENCES

DOCUMENT DATA

ユーザの意図を反映するような文書分類をおこなうためのひとつの方法とし、て前記表現空間変換関数により構成される空間における不必要な特徴次元や、悪影響を及ぼすような特徴次元に対し削除や合成をおこなったり逆にある特徴次元を強要させるための操作をすることが考えられる。しかし、前記表現空間変換関数により生成される空間の特徴次元は、前記文書群解析部にて抽出される単語のうち意味的に似たものが複数連合したものと考えられることができるため、各特徴次元の意味的な解釈はきわめて複雑かつ多義的なものであるため、ユーザに各特徴次元の意味を提示することはきわめて難しい。そこで、ユーザに分類させたくない内容や強要したい内容を持つ文章や単語などを指定させ、それらを前記表現空間変換関数により構成される空間に適切に射影し、それらと類似度の高い特徴次元や低い特徴次元を判別することで、操作をおこなう特徴次元を選択することが考えられる。ここでは、前記表現空間変換関数の特徴次元を操作する側として、ユーザが指定するある文書と類似度の高い特徴次元の削除をおこなう側を示す。ユーザにとり、指定された文書を前記文書特徴ベクトルと同じ次元を持つベクトルで表現し、その文書ベクトルに前記表現空間変換関数を適用し文書ベクトルを前記表現空間変換関数により構成される空間へ射影する。そして、この射影された文書ベクトルと各特徴次元との類似度を算出することで、類似度の高い特徴次元を判別する。このとき、類似度を測るための尺度としては、余弦尺度、内蔵尺度、ユークリッド距離尺度などを用いることができる。また、判別に関しては、ある類似度以上を削除対象として採用するような閾値処理による判別、類似度の高い層にある一定数を削除対象として採用する定数処理、もしくは判別分析なども用いることができる。このようにして、採用された特徴次元を前記表現空間変換関数から削除することで前記表現空間変換関数を修正することができる。

DIVISION OF DOCUMENT DATA

REGION FROM 200TH LETTER AFTER THE HEADER TO
THE NEAREST BREAK BEFORE OR AFTER IS DEEMED
A DIVIDED DOCUMENT

DIVIDED DOCUMENT 1

ユーザの意図を反映するような文書分類をおこなうためのひとつの方法とし、て前記表現空間変換関数により構成される空間における不必要な特徴次元や、悪影響を及ぼすような特徴次元に対し削除や合成をおこなったり逆にある特徴次元を強要させるための操作をすることが考えられる。しかし、前記表現空間変換関数により生成される空間の特徴次元は、前記文書群解析部にて抽出される単語のうち意味的に似たものが複数連合したものと考えられることができるため、各特徴次元の意味的な解釈はきわめて複雑かつ多義的なものであるため、ユーザに各特徴次元の意味を提示することはきわめて難しい。

DIVIDED DOCUMENT 2

そこで、ユーザに分類させたくない内容や強要したい内容を持つ文章や単語などを指定させ、それらを前記表現空間変換関数により構成される空間に適切に射影し、それらと類似度の高い特徴次元や低い特徴次元を判別することで、操作をおこなう特徴次元を選択することが考えられる。ここでは、前記表現空間変換関数の特徴次元を操作する側として、ユーザが指定するある文書と類似度の高い特徴次元の削除をおこなう側を示す

DIVIDED DOCUMENT 3

ユーザにとり、指定された文書を前記文書特徴ベクトルと同じ次元を持つベクトルで表現し、その文書ベクトルに前記表現空間変換関数を適用し文書ベクトルを前記表現空間変換関数により構成される空間へ射影する。そして、この射影された文書ベクトルと各特徴次元との類似度を算出することで、類似度の高い特徴次元を判別する。このとき、類似度を測るための尺度としては、余弦尺度、内蔵尺度、ユークリッド距離尺度などを用いることができる。

DIVIDED DOCUMENT 4

また、判別に関しては、ある類似度以上を削除対象として採用するような閾値処理による判別、類似度の高い層にある一定数を削除対象として採用する定数処理、もしくは判別分析なども用いることができる。このようにして、採用された特徴次元を前記表現空間変換関数から削除することで前記表現空間変換関数を修正することができる。

FIG.55

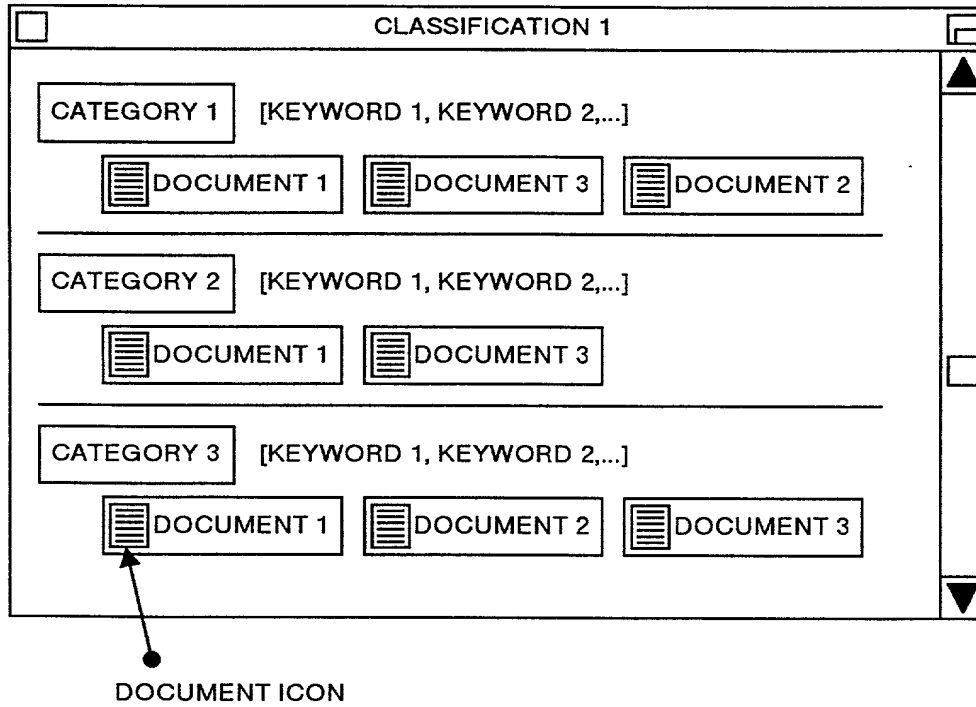


FIG.56

